
MILITARY SPECIFICATION SHEET

CONNECTORS ELECTRICAL CIRCULAR HIGH DENSITY QUICK DISCONNECT ENVIRONMENT RESISTING AND ACCESSORIES PLUG CRIMP-TYPE CONTACTS CLASS A F AND E (SERIES 2)

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81511

This specification is mandatory for use by all Departments and Agencies of the Department of Defense

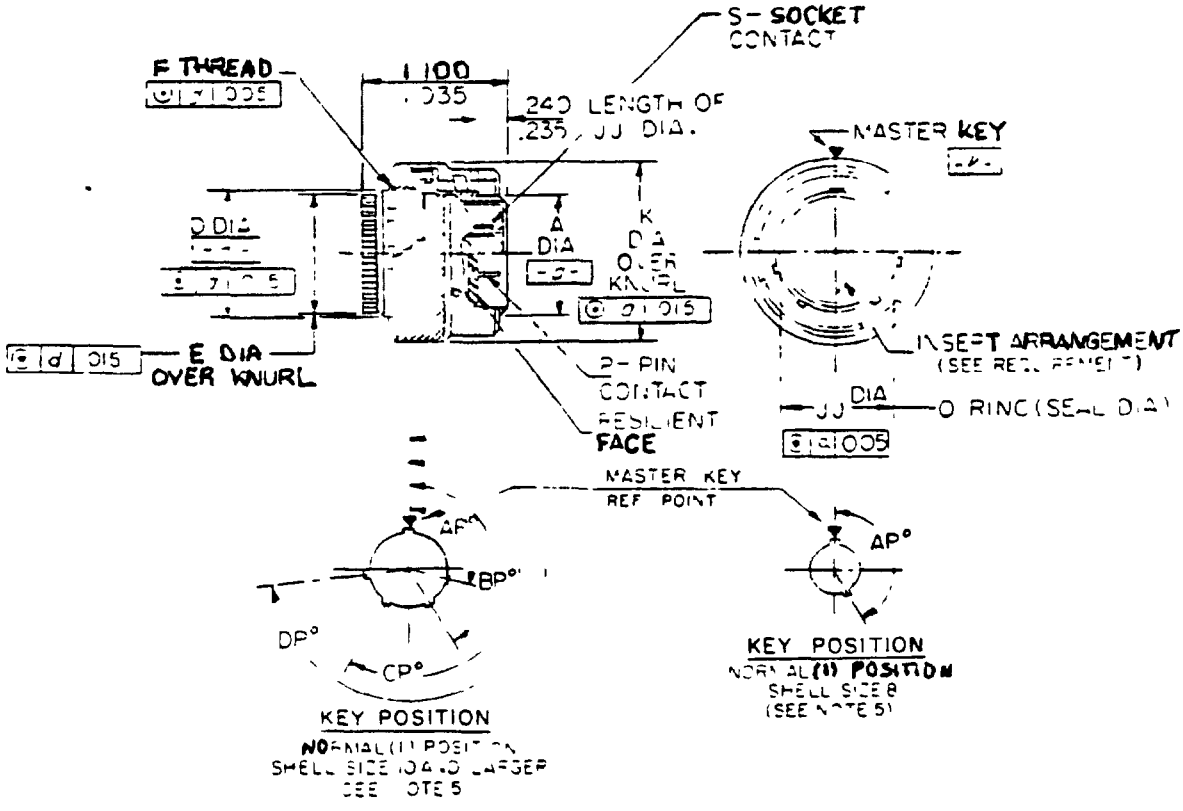

INCHES	MM
.005	.13
.015	.38
.235	5.97
.240	6.10
1.035	26.29
1.160	29.46

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

TABLE I

Shell size	A dia	D dia	E dia	F thread	K dia	AP BSC	BP BSC	CP BSC	DP BSC	JJ dia
8	.3815 (9.69) .3755 (9.54)	.430 (10.92) .424 (10.77)	.422 (10.72) 407 (10 34)	½-28UNEF 2A	.850 (21.59) .830 (21.08)	128°				.382 (9.70) .373 (9.47)
10	.5065 (12.87) .5005 (12.71)	.555 (14.10) 549 (13.94)	.548 (13.92) 533 (13 54)	5/8-28UN 2A	.975 (24.77) .955 (24.26)	105°	140°	215°	265°	.507 (12.88) .498 (12.65)
14	.7565 (19.22) .7505 (19 06)	.805 (20.45) .799 (20.29)	.798 (20.27) .783 (19 89)	7/8 28UN 2A	1.225 (31.12) 1.205 (30.61)	105	140°	215°	265°	.757 (19.23) .746 (18.95)
16	.8825 (22.42) .8765 (22.26)	.930 (23.62) .924 (23.47)	.924 (23.47) 909 (23 09)	1 28UN 2A	1.350 (34.29) 1.330 (33.78)	105	140°	215°	265°	.883 (22.43) .872 (22.15)
18	1.0065 (25.57) 1.0005 (25.41)	1.055 (26.80) 1.049 (26.64)	1.048 (26.62) 1 033 (26.24)	1-1 8 28UN 2A	1.475 (37.47) 1.455 (36.96)	105°	140°	215°	265	1.007 (25.58) .996 (25.30)

NOTES
1. Dimensions are in inches
2. Millimeters are in parentheses
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
4. Dimensions are after plating.
5. Normal key positions are shown. For alternate key positions see MIL-C 81511, figure 4
6. For shell sizes 20, 22 and 24 use MIL-C 81511/26 connectors

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure and table I

Series 2

Classes A F, and E

Shell size See table II

Insert arrangement See supplement for MS sheet corresponding to desired shell size

Contacts Style P or S crimp type

Shell polarization 1 thru 6 key position

Weight See table II

Marking Part number on shell or coupling ring

Mating counterpart Items specified in MIL-C-81511 1 2 3 4 5 31 32 and 33

Insertion and removal tool As specified in MS3323 MS3342 and MS3344

Part number The part number shall consist of M81511 06 together with the applicable codes for class shell size insert arrangement contact style and key positions Information concerning the formulation of the part number can be found in MIL-C-81511

TABLE II

Shell size	Weight (REF) [1] (pounds)
18 (code F)	080
16 (code E)	067
14 (code D)	056
10 (code B)	035
8 (code A)	.027

1 Removable crimp contacts not included in weight
(See contact drawings for weight or pin and socket contact)

Custodians
Army - EL
Navy - AS
Air Force - 17

Review activities
Army - MI MU AV WC
Navy - SH EC OS
Air Force 11 80
DSA ES

User activities
Army - ME AT
Navy - MC
Air Force

Preparing activity
Navy - AS

(Project No 5935-1732-6)

☆ U S. GOVERNMENT PRINTING OFFICE 1970 433-693 7919

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22 R255

INSTRUCTIONS. This sheet is to be filled out by personnel either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for furnishing information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-C-81511/6E - CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES: PLUG, CRIMP-TYPE CONTACTS, CLASS A, F AND E (SERIES 2)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

[ ] YES [ ] NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity. Optional)*

DATE

DD FORM 1 JAN 64 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD-316

U.S. MAIL

OFFICIAL BUSINESS

Weapons Engineering Standardization Office (Code X)
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.