
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE WITH SOCKET CONTACTS, 2 KEYING GUIDES FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

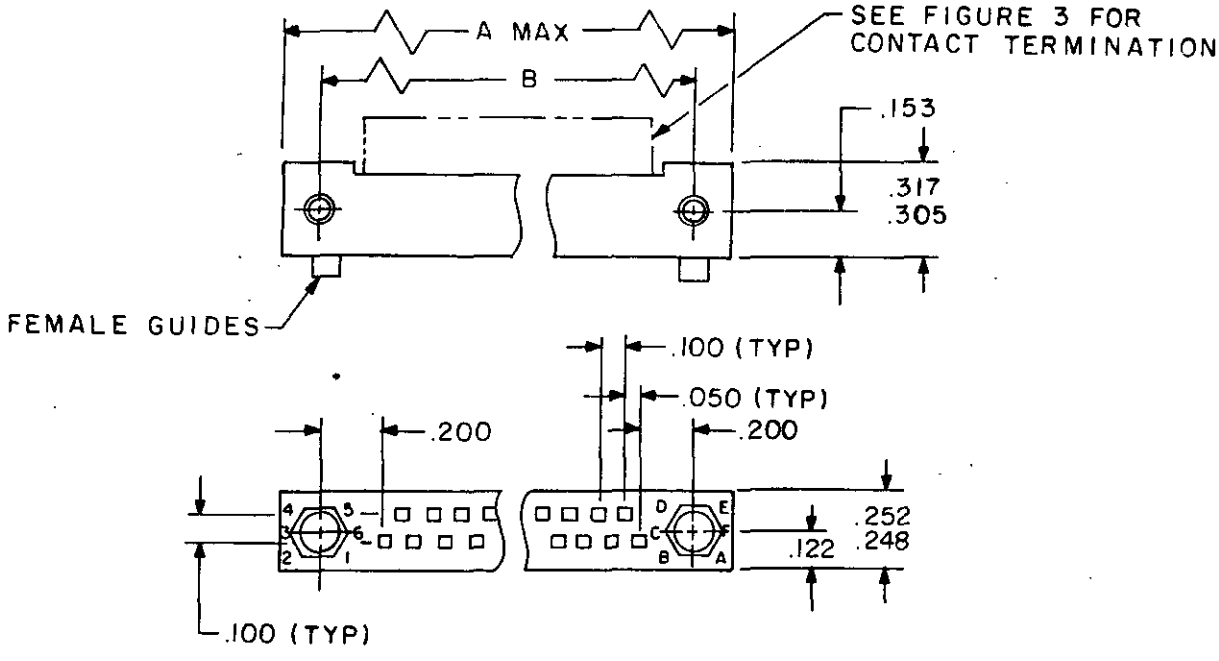

INCHES	MM	INCHES	MM
.050	1.27	.248	6.30
.100	2.54	.252	6.40
.122	3.10	.305	7.45
.153	3.89	.317	8.05
.200	5.08		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005(.13 mm).


FIGURE 1. Connector, receptacle (.100 inch spacing).

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

TABLE I. Arrangements and characteristics.

Contact arrangement	No of contacts	Dimensions (inches) A MAX	Dimensions (inches) B ±.006
M55302/142A	17	1.516 (38.50)	1.200 (30.48)
M55302/142B	29	2.114 (53.70)	1.80 (45.72)
M55302/142C	33	2.314 (58.80)	2.000 (50.80)
M55302/142D	41	2.716 (69.00)	2.400 (60.96)
M55302/142E	53	3.315 (84.20)	3.000 (76.20)
M55302/142F	65	3.917 (99.50)	3.600 (91.44)

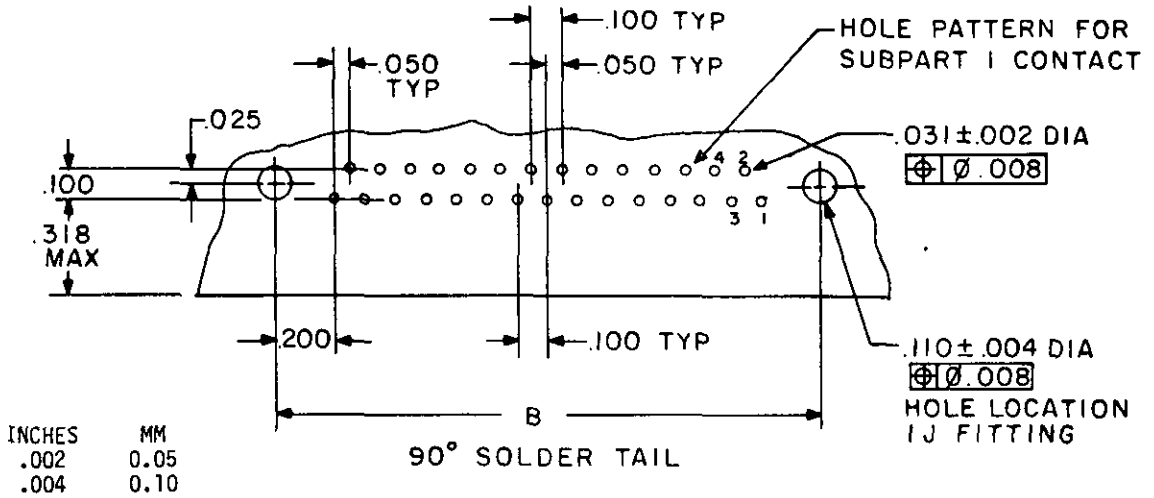


INCHES	MM
.002	0.05
.004	0.10
.008	0.20
.025	0.64
.031	0.79
.050	1.27

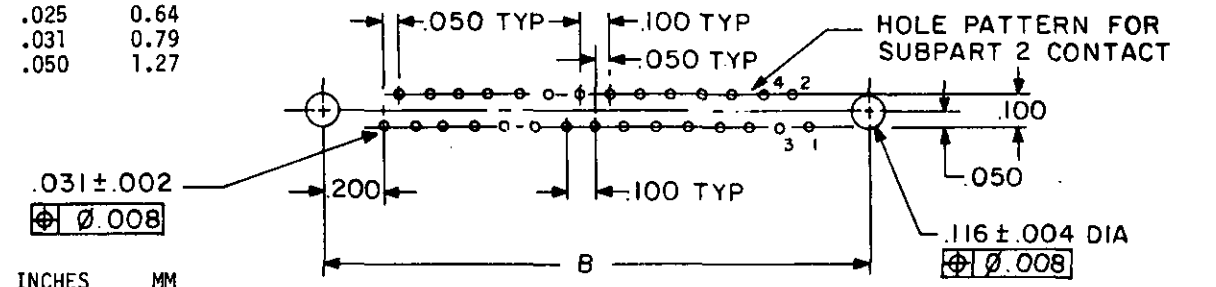


INCHES	MM
.100	2.54
.110	2.79
.116	2.95
.200	5.08
.318	8.08

FIGURE 2. Recommended hole patterns.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.




Part number
M55302/142A




Part number
M55302/142B




Part number
M55302/142C



Part number
M55302/142D




Part number
M55302/142E




Part number
M55302/142F

FIGURE 3. Contact arrangements and keying configurations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

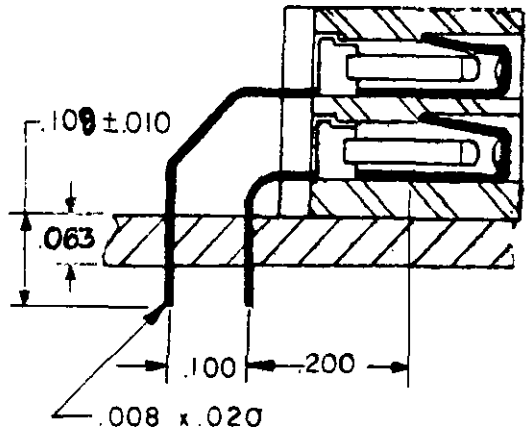


Subpart 1
90° Solder tails

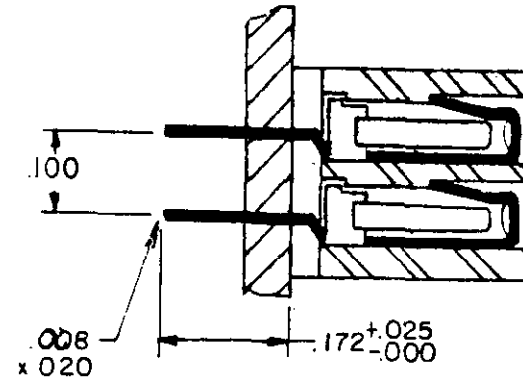


Subpart 2
Solder tails

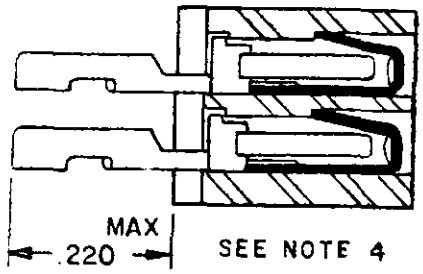


Subpart 3
Solder terminals

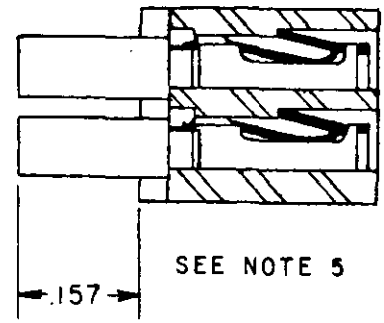

Subpart 4
Crimp 24-28 AWG

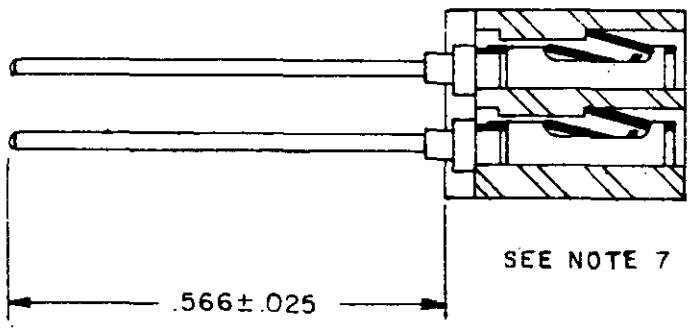

Subpart 5
Wire wrappost

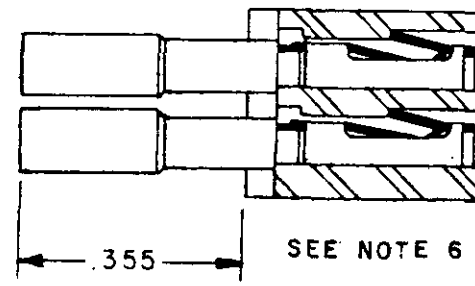


Subpart 6
Crimp 22 AWG

INCHES	MM	INCHES	MM
.008	0.20	.157	3.99
.010	0.25	.172	4.37
.020	0.05	.200	5.08
.025	0.64	.220	5.59
.063	1.60	.355	9.02
.100	2.54	.566	14.38
.108	2.74		


NOTES:
1. *Dimensions are in inches.*
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Contact accepts no. 22 AWG wire.
5. Contact, crimp type, accepts no. 22-26 AWG wires.
6. Contact, crimp type with insulation support barrel, accepts no. 22-26 AWG wire.
7. Contact with .025 (0.64 mm) wrappost per MIL-STD-1130.

FIGURE 4. Contact terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

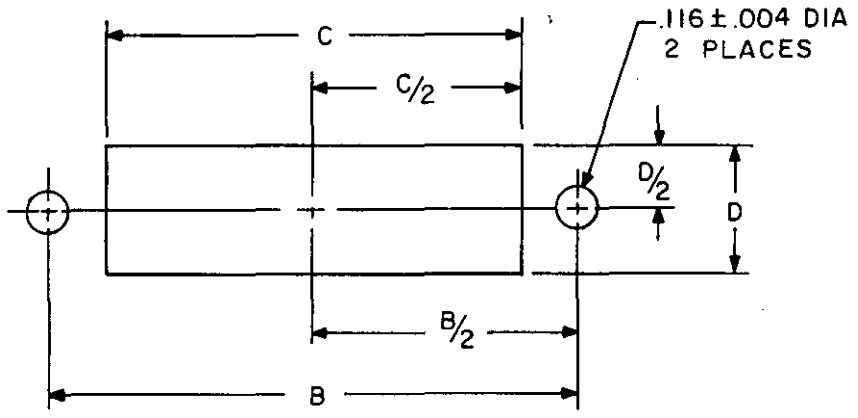

FIXED MOUNT

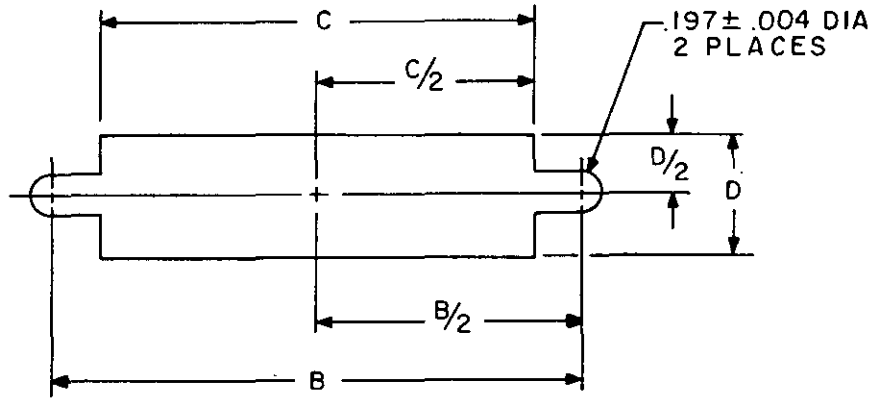

FLOATING MOUNT

Number of Contracts	17	29	33	41	53	65
B ±.008 (±0.20)	1.200 (30.48)	1.800 (45.72)	2.000 (50.80)	2.400 (60.96)	3.000 (76.20)	3.600 (91.44)
C Min.	1.020 (25.91)	1.618 (41.10)	1.819 (46.20)	2.221 (56.41)	2.819 (71.60)	3.422 (86.92)
D Min.	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 5. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures and table I.

Material and finish:

Insulator: Flame retardant diallyl phthalate, per MIL-M-14, type SDGF.

Contact identification: See figure 3.

Contact retention: 4 pounds minimum per contact.

Contact engagement: 0.7 ounce minimum, 4 ounces maximum.

Contact separation: 0.5 ounce minimum.

Contact resistance: Shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating, maximum: 2.5 amperes.

Keying socket: Two hexagonal keyed guides provide 36 polarizing positions. Keys are constructed per M55302/154. Connectors are supplied with keying pins in the "1" and "A" positions. When required, connectors can be easily keyed to the desired position by using a standard wrench or screwdriver.

Crimping tools (for subpart 4 and 6):

Basic tool: M22520/2-01.

Positioner: M22520/2-37.

Removal tool (for subpart 4 and 6): See M81969/40-01.

Hood types: See MIL-C-55302/155.

Mounting hardware: See MIL-C-55302/154.

Mating connectors: Shall conform to MIL-C-55302/140.

Retention clip: Optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

M55302/142 * * N 1 *

Specification sheet number
Receptacle with socket contacts

Contact arrangement
(see figure 3)

Contact type - 2.5 amperes
(see figure 4)

Contact type - Coaxial
N - not applicable

Indexing type
1 - Hexagon post (36 positions)

Mounting hardware
(see MIL-C-55302/154)

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-3373-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.