

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: GUIDE PINS, JACKSCREWS AND MOUNTING EARS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

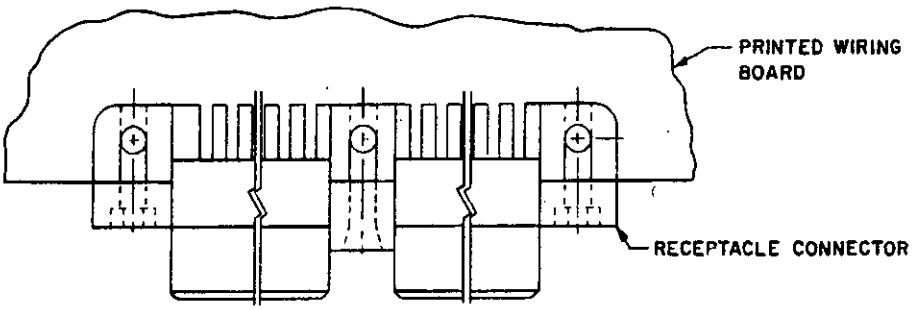

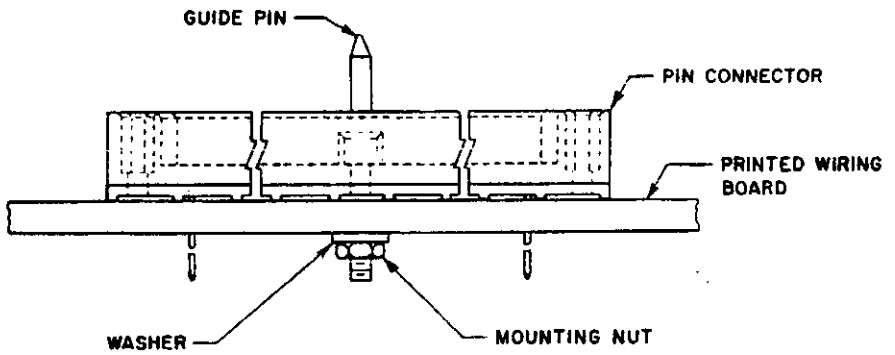

Note: See figures 2 and 3 for part numbers.

Inches	mm	Inches	mm
0.030	0.76	0.265	6.73
0.049	1.24	0.306	7.77
0.050	1.27	0.320	8.13
0.052	1.32	0.340	8.64
0.076	1.93	0.365	9.27
0.080	2.03	0.375	9.52
0.086	2.18	0.440	11.18
0.100	2.54	0.475	12.06
0.112	2.84	0.495	12.57
0.140	3.56	0.500	12.70
0.170	4.32	0.562	14.28
0.174	4.42	0.650	16.51
0.175	4.44	0.750	19.05
0.180	4.57	0.790	20.07
0.187	4.75	0.845	21.46
0.220	5.59	1.250	31.75
0.250	6.35		

FIGURE 1. Installation of guide pin.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

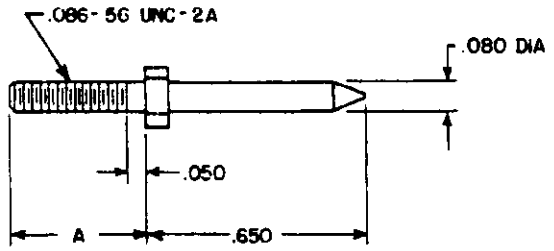


FIGURE 2. Guide pin, M55302/182-01, -02 and -03.

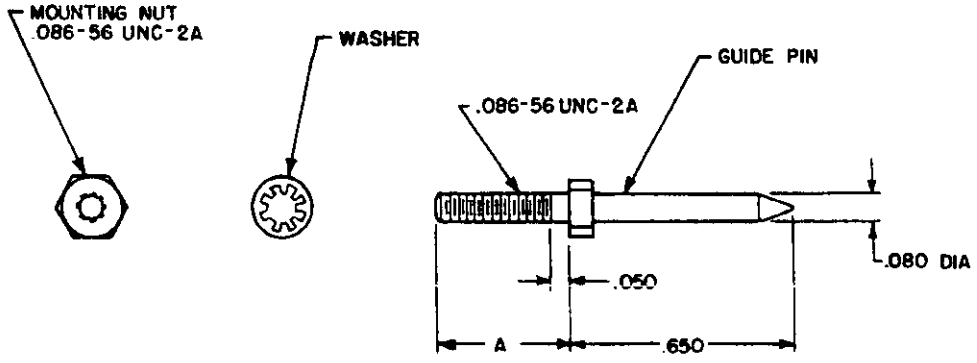


FIGURE 3. Guide pin kit, M55302/182-04, -05 and -06.

Type	Guide pin number	A	Figure
I	M55302/182-01	.475	1,2
II	M55302/182-02	.562	1,2
III	M55302/182-03	.750	1,2
IV	M55302/182-04	.475	1,3
V	M55302/182-05	.562	1,3
VI	M55302/182-06	.750	1,3

Notes:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

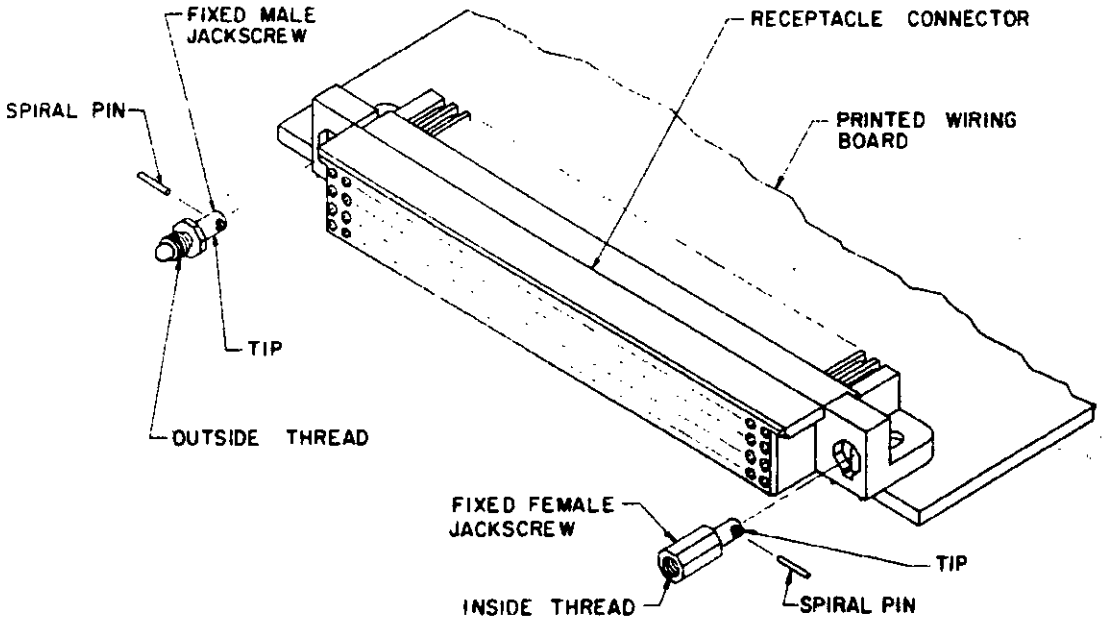


FIGURE 4. Installation of fixed jackscrews.



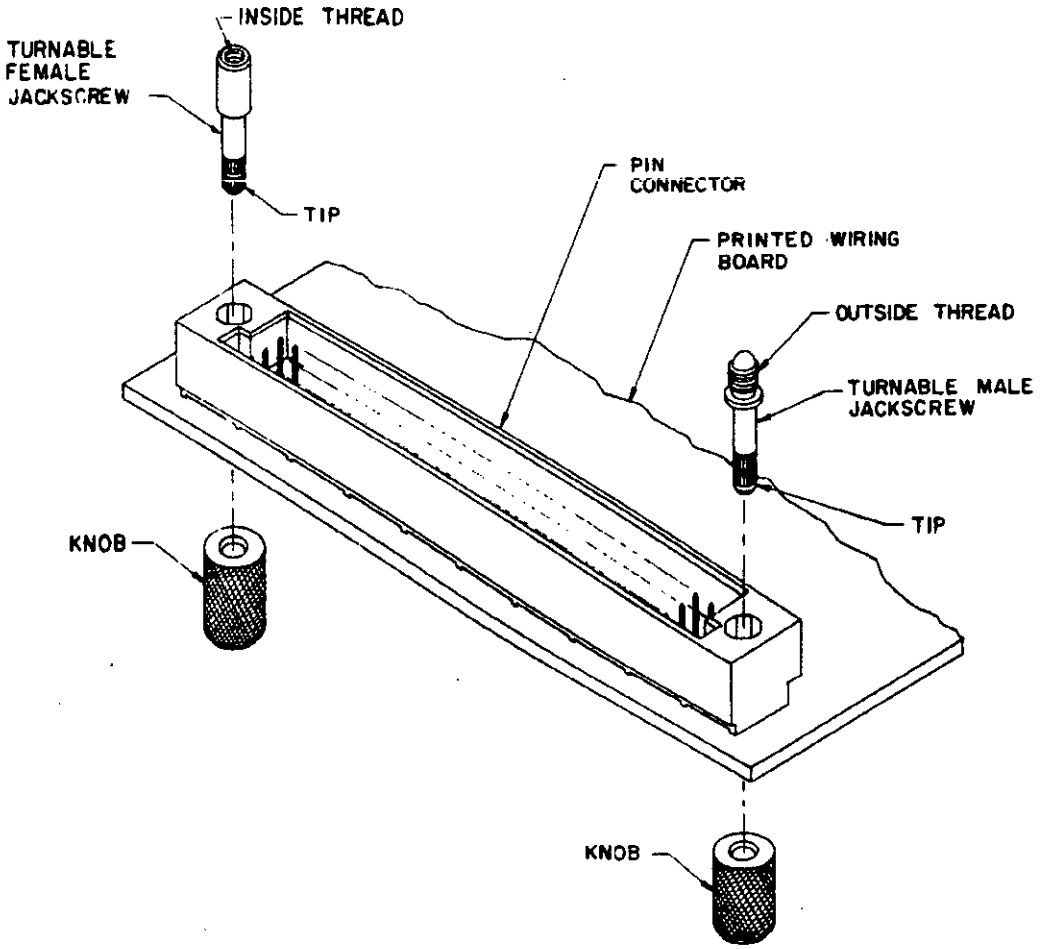


FIGURE 5. Installation of turnable jackscrews.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

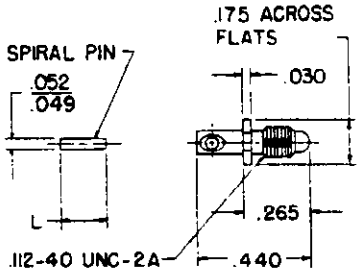


FIXED MALE JACKSCREW
M55302/182-7and-8

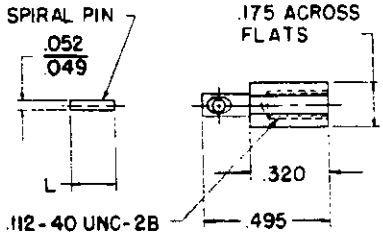


FIXED FEMALE JACKSCREW
M55302/182-9and-10

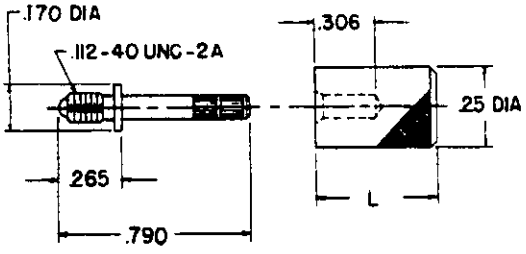


TURNABLE MALE JACKSCREW
M55302/182-14

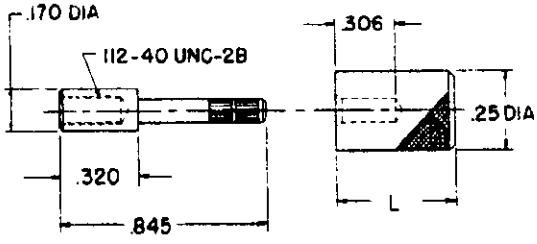


TURNABLE FEMALE JACKSCREW
M55302/182-11

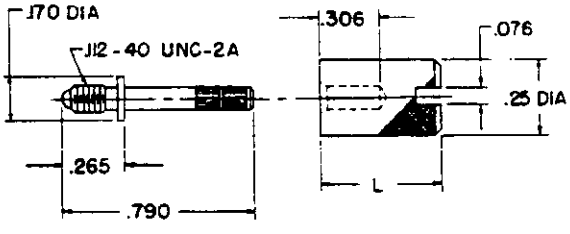


TURNABLE MALE JACKSCREW
M55302/182-15

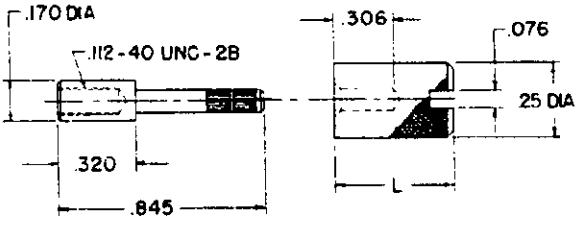



TURNABLE FEMALE JACKSCREW
M55302/182-12



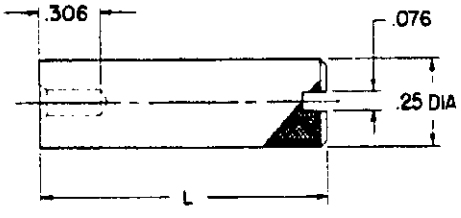

TURNABLE MALE JACKSCREW
M55302/182-16



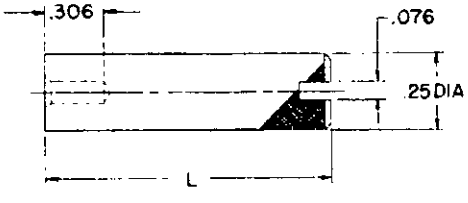

TURNABLE FEMALE JACKSCREW
M55302/182-13

FIGURE 6. Jackscrews.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

Type	Jackscrew part number	Style	L	Figure	Used in receptacle assembly	Mating pin assembly	Mating jackscrew		L	Figure
							Part no	Style		
VII	M55302/182-07	Fixed male	.187	4,6	M55302/177 M55302/180	M55302/176 M55302/179	M55302/182-11	Turnable female	.50	5,6
							M55302/182-12		.50	
							M55302/182-13		1.25	
VIII	M55302/182-08	Fixed male	.140	4,6	M55302/174	M55302/173	M55302/182-11	Turnable female	.50	5,6
							M55302/182-12		.50	
							M55302/182-13		1.25	
IX	M55302/182-09	Fixed female	.187	4,6	M55302/177 M55302/180	M55302/176 M55302/179	M55302/182-14	Turnable male	.50	5,6
							M55302/182-15		.50	
							M55302/182-16		1.25	
X	M55302/182-10	Fixed female	.140	4,6	M55302/174	M55302/173	M55302/182-14	Turnable male	.50	5,6
							M55302/182-15		.50	
							M55302/182-16		1.25	

Notes:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).

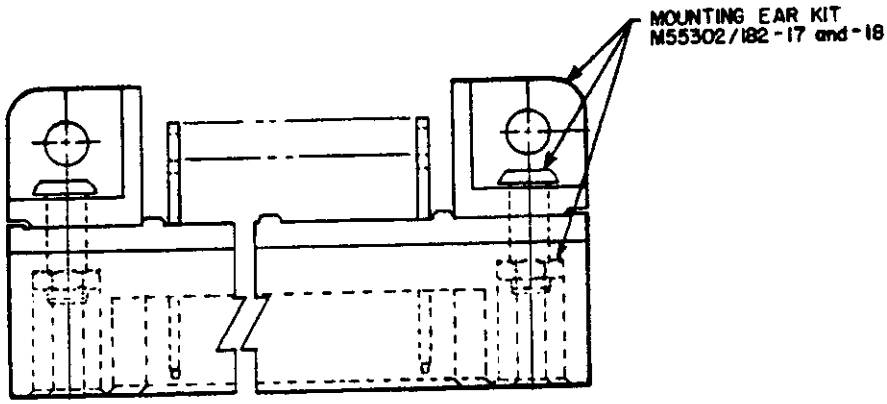


FIGURE 7. Installation of mounting ear for M55302/175, /178, and /181.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

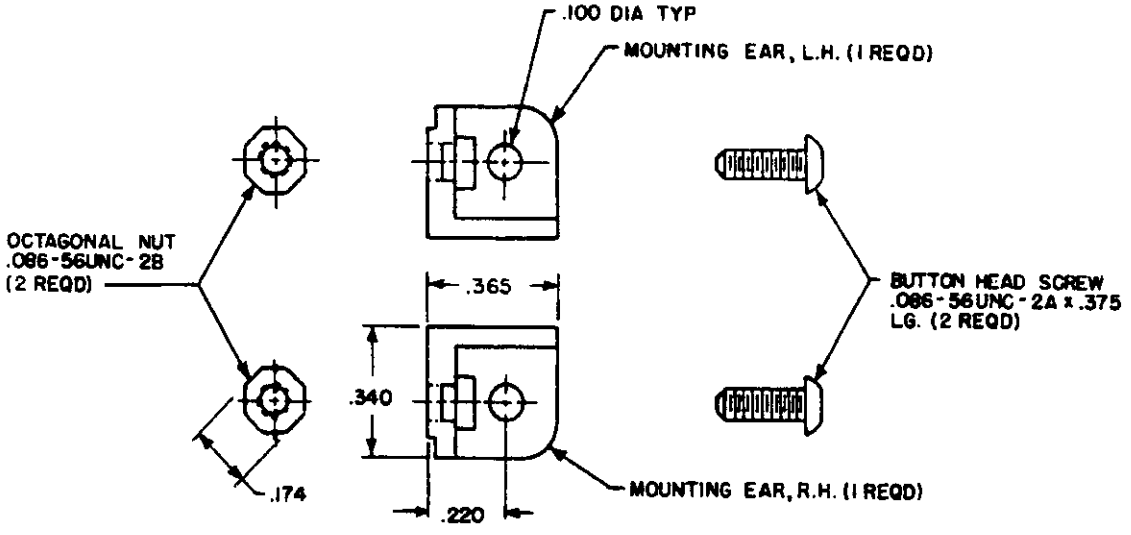


FIGURE 8. Mounting ear kit for M55302/175.

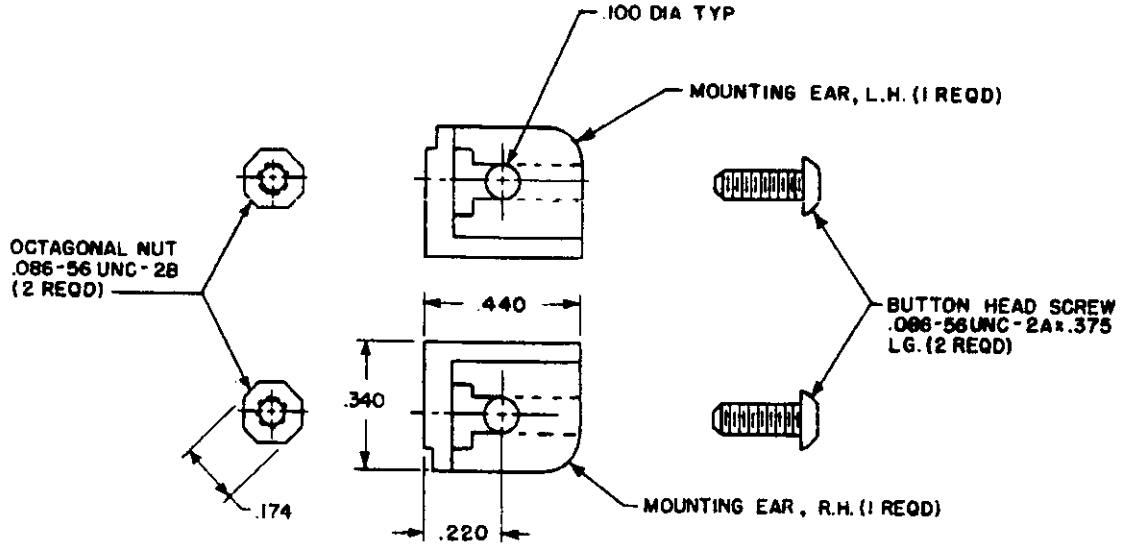


FIGURE 9. Mounting ear kit for M55302/178 and M55302/181.

Type	Mounting ear kit	Figure
XI	M55302/182-17	7,8
XII	M55302/182-18	7,9

Notes:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Design and configuration: See figures 1 through 9.

Material:
Types I through III:
Guide pin: Stainless steel in accordance with ASTM A 582.
Types IV through VI:
Guide pin: Stainless steel in accordance with ASTM A 582.
Mounting nut: Stainless steel in accordance with ASTM A 582.
Internal tooth lock washer: Stainless steel in accordance with ASTM A 176.
Types VII through X:
Knob: Stainless steel in accordance with ASTM A 582.
Turnable jackscrew: Stainless steel in accordance with ASTM A 582.
Fixed jackscrew: Stainless steel in accordance with ASTM A 582.
Spiral pin: Stainless steel in accordance QQ-S-756.
Types XI and XII:
Mounting ear: In accordance with MIL-C-55302.
Octagonal nut: Stainless steel in accordance with ASTM A 582.
Button head screw: Alloy steel in accordance with ASTM A 574.

Finish:
Types I through III:
Guide pin: Passivate in accordance with QQ-P-35.
Types IV through VI:
Guide pin: Passivate in accordance with QQ-P-35.
Mounting nut: Passivate in accordance with QQ-P-35.
Internal tooth lock washer: Passivate in accordance with QQ-P-35.
Types VII through X:
Knob: Passivate in accordance with QQ-P-35.
Turnable jackscrew: Passivate in accordance with QQ-P-35.
Fixed jackscrew: Passivate in accordance with QQ-P-35.
Spiral pin: Passivate in accordance with QQ-P-35.
Types XI and XII:
Octagonal nut: Passivate in accordance with QQ-P-35.
Button head screw: Black thermal oxide.

Application:
Types I through VI shall be used with connectors found in M55302/176 and /179.
Types VII and IX shall be used with connectors found in M55302/176, /177, /179, and /180.
Types VIII and X shall be used with connectors found in M55302/173 and /174.
Type XI shall be used with connectors found in M55302/175.
Type XII shall be used with connectors found in M55302/178 and /181.

Installation:
Types I through VI: See figure 1.
Types VII through X: See figures 4 and 5.
Types XI and XII: See figure 7.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-3542-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.