INCH-POUND


MIL-A-55339/30B
8 February 1989
SUPERSEDING
MIL-A-55339/30A
28 February 1979

MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY, "T",
(WITHIN SERIES SMA PLUG TO TWO SERIES SMA JACKS), CLASS 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-A-55339.

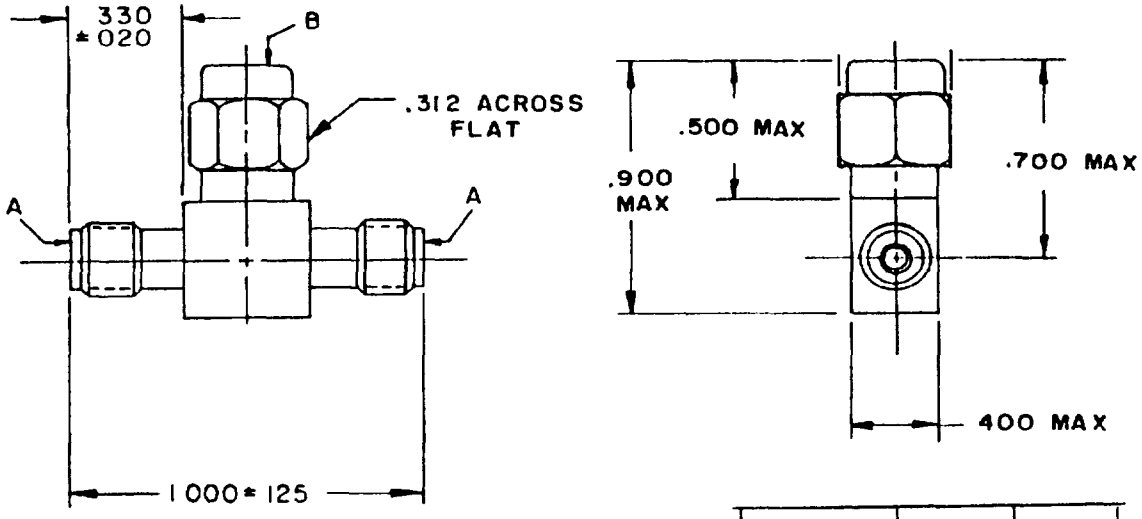

M55339/30-30101 /30-40101 } without safety wire holes


M55339/30-30001 /30-40001 } with safety wire holes

Reference	Series	Contact
A	SMA	Socket
B	SMA	Pin

FIGURE 1 General configurations


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

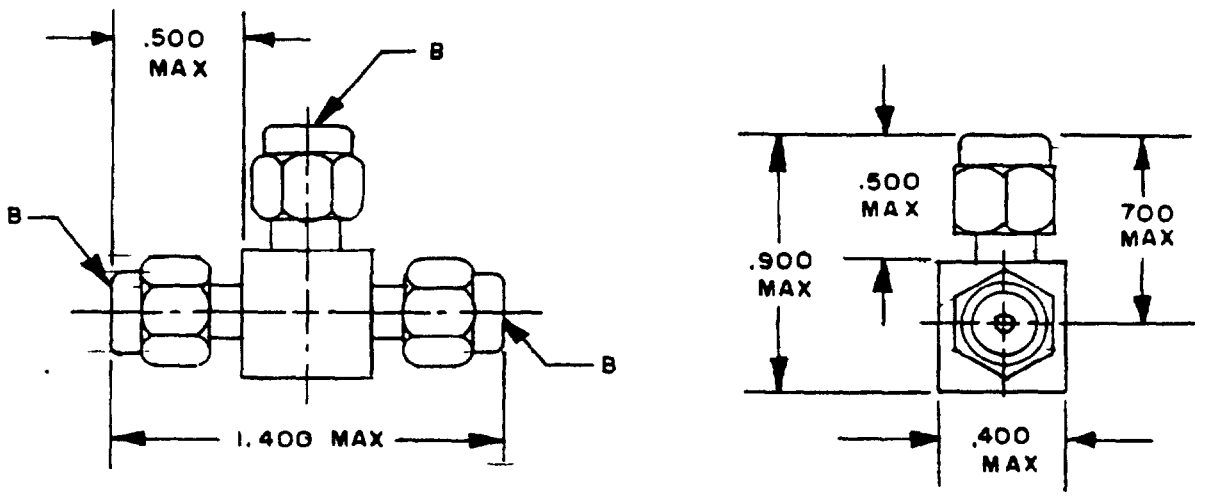

M55339/30-30102
/30-40102
} without safety wire holes


M55339/30-30002
/30-40002
} with safety wire holes

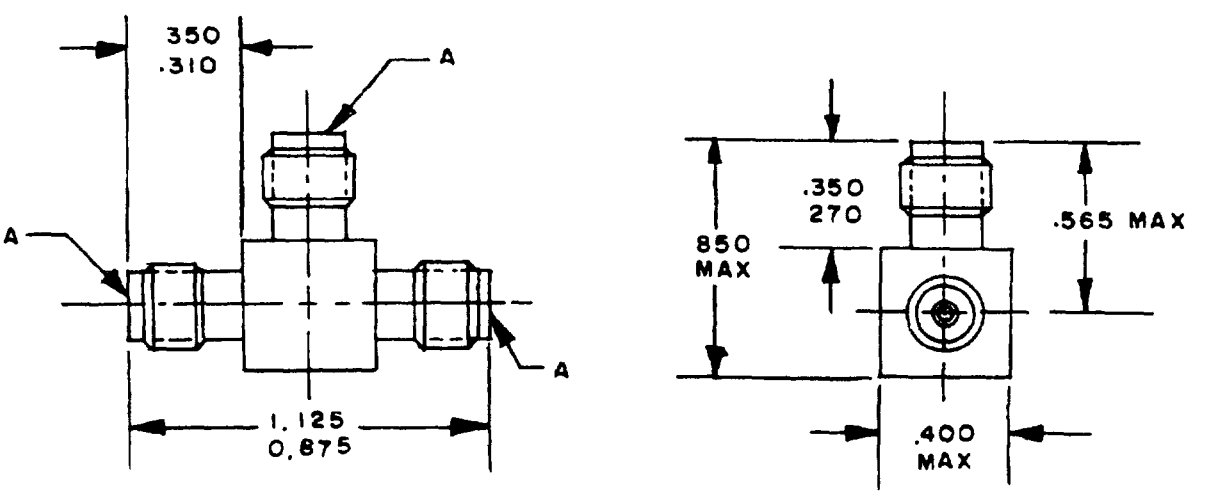

M55339/30-30003
/30- 40003


FIGURE 1. General configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:06Z
Check the source to verify that this is the currentversion before use.

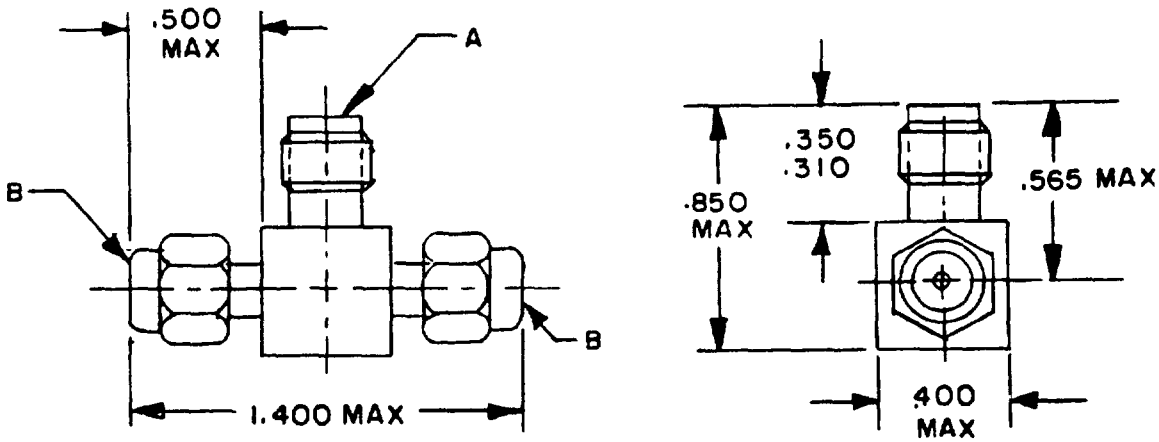

M55339/30-30104 /30-40104 } without safety wire holes

M55339/30-30004 /30-40004 } with safety wire holes

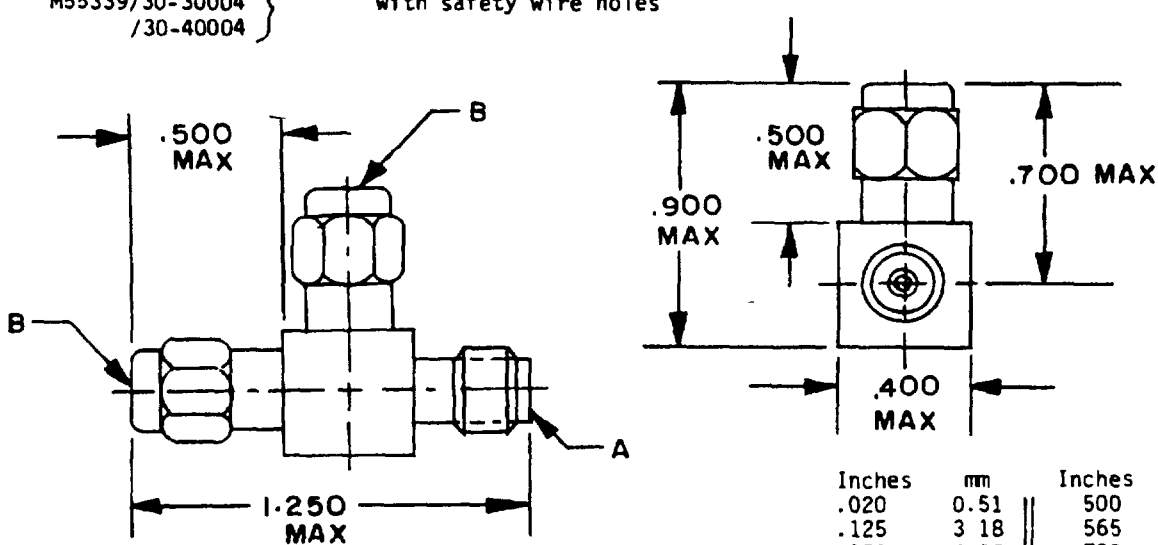

M55339/30-30105 /30-40105 } without safety wire holes

M55339/30-30005 /30-40005 } with safety wire holes

Inches	mm	Inches	mm
.020	0.51	500	12 70
.125	3 18	565	14 35
.270	6 86	.700	17.78
.310	7.87	850	21 59
.312	7.92	.875	22 23
.330	8.38	.900	22 86
.350	8.89	1 000	25 40
400	10.16	1 125	28 58
		1 400	35 56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. All undimensioned pictorial configurations are for reference purposes only
4. Interfaces shall be in accordance with MIL-STD-348.

FIGURE 1. General configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA.

Impedance: 50 ohms, nominal.

Working voltage.

Sea level: 335 V rms.

70,000 feet: 85 V rms.

Frequency range: 0 to 12.4 GHz.

Temperature range: -65°C to +165°C.

REQUIREMENTS:

Dimensions and configuration. See figure 1 and section 310 of MIL-STD-348.

Center contact retention:

Axial force: 6 pounds, minimum.

Torque. 4 inch-ounces, minimum.

Inspection conditions. For each test of threaded coupling connectors where the test is performed on mated pairs, the pairs shall be torqued to 7 to 10 inch-pounds.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: 2 inch-pounds, maximum.

Coupling proof torque: 15 pounds, minimum.

Mating characteristics.

Center contact (socket):

Oversize test pin diameter. .0375 + .0001 inch, minimum.

Pin finish: 16 microinches.

Insertion depth .030/.045 inch, minimum

Number of insertions. Three.

Maximum test pin (insertion force test):

Steel test pin diameter. .0370 + .0001 inch, minimum.

Pin finish 16 microinches.

Insertion depth. .050/.075 inch, minimum.

Insertion force: 3 pounds, maximum

Number of insertions. One.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

Minimum test pin (withdrawal force).

Steel test pin diameter: .0355 - .0001 inch, minimum.

Pin finish: 16 microinches.

Insertion depth. .050/.075 inch, minimum.

Withdrawal force: 1 ounce, minimum.

Number of withdrawals. One.

Permeability: Less than 2.0.

Seal.

Pressurized:. Not applicable.

Weatherproof: Not applicable.

Insulation resistance: 5,000 megohms, minimum.

VSWR: Not applicable.

RF leakage (total): Not applicable.

RF insertion loss: Not applicable.

Durability: 500 cycles minimum at 12 cycles/minute maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Dielectric withstanding:

Test voltage: 1,000 V rms, minimum (sea level).

Contact resistance (milliohms, maximum):

Contact	Initial	After environmental
Center	6.0	8.0
Outer	2.0	Not applicable

Vibration, high frequency:

Interruptions: 1 µs, maximum. Test condition D.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, minimum, within 5 minutes after removal from humidity.

Corona level:

Voltage: 250 V, minimum.

Altitude: 70,000 feet, minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

RF high potential withstanding voltage:

RF voltage. 670 V rms, minimum.

Frequency: 5 MHz, minimum.

Salt spray (corrosion): Test condition B.

Coupling mechanism retention force: 60 pounds, minimum.

Group qualification: See table I.

Part or identifying numbers (PIN). See figure 1.

Marking: As specified in MIL-A-55339.

NOTE: For logistics purposes, only adapters with safety wire hole will be stocked.

TABLE I. Group qualification.

Group	Submission and qualification of any of the following connectors	Qualifies the following connectors
1	M55339/30-30001	M55339/30-30101 M55339/30-30001 M55339/30-30102 M55339/30-30002 M55339/30-30003 M55339/30-30104 M55339/30-30004 M55339/30-30105 M55339/30-30005
2	M55339/30-40001	M55339/30-40101 M55339/30-40001 M55339/30-40102 M55339/30-40002 M55339/30-40003 M55339/30-40104 M55339/30-40004 M55339/30-40105 M55339/30-40005

NOTE: When QPL sources are obtained for the new configurations, DESC drawing 87028 will be canceled.

Source: https://assist.dla.mil -- Downloaded: 20260-22T23:06Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3664-01)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:06Z
Check the source to verify that this is the current version before use.