NOT MEASUREMENT SENSITIVE

MIL-L-11484/86B
14 January 1994
SUPERSEDING
MIL-L-11484/86A
27 June 1988

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, ACTIVE RESERVIST, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

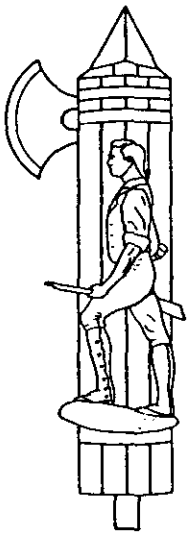

MATERIAL: Red Brass

FINISH:
BASE (Fasces): Copper Flash, Oxidized, Lightly Relieved
DEVICE (Minuteman): Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
BASE:
HEIGHT (Overall): 45/64 inch (1.79 cm) (REF)
WIDTH (Overall): 7/32 inch (0.56 cm) (REF)
THICKNESS (At Thickest Point): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:35Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT (Overall): 25/64 inch (0.99 cm) (REF)
WIDTH (Overall): 11/64 inch (0.44 cm) (REF)
THICKNESS (At Thickest Point): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

ASSEMBLED THICKNESS (Thickest Point): 0.100 inch ± 0.005 inch (0.254 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing on the device shall be as indicated.

3. The minuteman device shall be centered in the enameled area and shall be attached to the base by soft soldering or by riveting. If riveting is used, two rivets shall be required.

4. Attaching device shall be prong with pick and wing type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0743)

Source: https://assist.dla.mil -- Downloaded: 202610-17T16:35Z
Check the source to verify that this is the current version before use.