
MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CLASS I

(COAXIAL, SERIES TWIN, TWSMC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-3655.

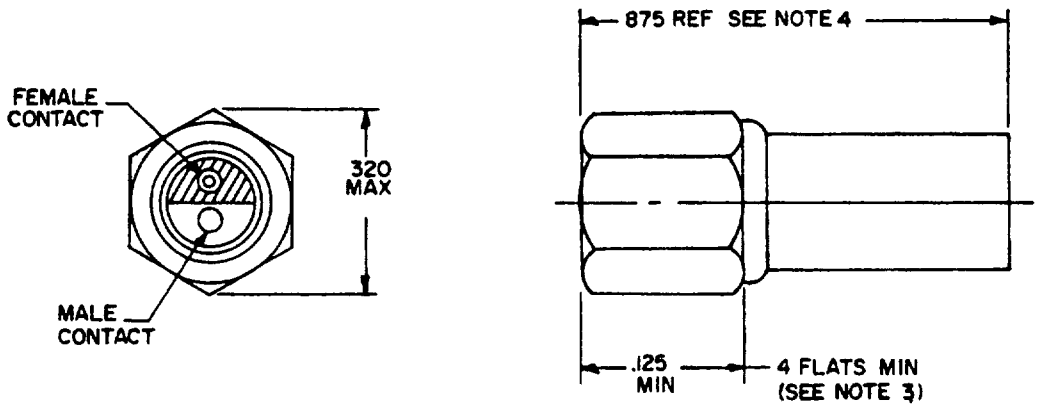


INCHES	MM
.125	3.17
.320	8.13
.875	22.23

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Wrench flats to accommodate standard wrench per H-28, app. 10.
4. Dimension defines the maximum length of connector when assembled to cable.
5. Maximum overall diameter of the connector is .320 (8.13 mm).
6. All undimensioned pictorial representations are for reference purposes only.
7. Not for Navair use.


FIGURE 1 General configuration

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:45Z
Check the source to verify that this is the current version before use.

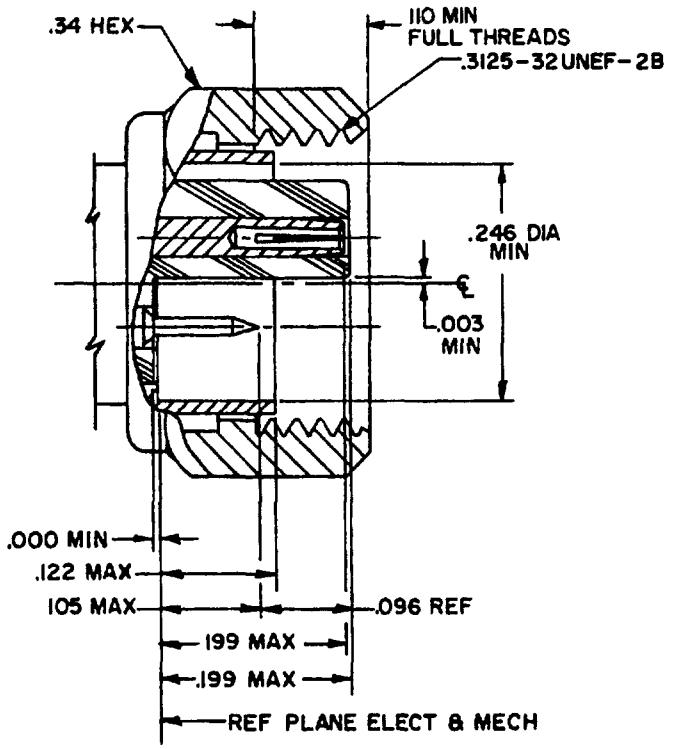

INCHES	MM
.003	.08
.010	.25
.019	.48
.021	.53
.096	2.43
.105	2.67
.110	2.79
.122	3.00
.199	5.05
.246	6.25
.34	8.63

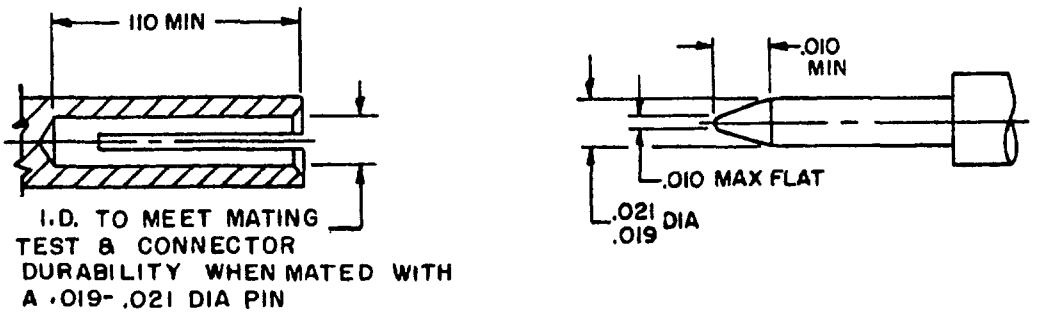

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Thread gage must go .234 min from reference plane.

FIGURE 2 Type TWSMC, visual mating requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:45Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA.

Nominal impedance: 95 ohms.

Frequency range 0 to 500 MHz, maximum

Voltage rating 300 Vrms at sea level, 75 Vrms at 70,000 feet.

Mating connector M3655/19-0001.

Captive contact retention· 4 pounds axial.

Cable accommodation To be determined.

REQUIREMENTS:

Design and construction: See figures 1 and 2.

Force to engage/disengage:
Torque 16 inch-ounces, maximum.
Longitudinal force: Not applicable.

Coupling proof torque. 100 inch-pounds, minimum.

Mating characteristics (see figures 1 and 2 for dimensions)
Inner contacts (female).
Oversize test pin .0215 inch diameter, minimum (nonclosed entry contacts only).
Insertion depth. .050 inch, minimum
Number of insertions One.

Insertion force test
Steel test pin diameter .021 inch, minimum.
Test pin finish 16 microinches.
Insertion force· 2.5 pounds, maximum.

Withdrawal force test
Steel test pin diameter· .019 inch, maximum.
Test pin finish· 16 microinches
Withdrawal force 1 ounce, minimum.

Permeability Not applicable.

Hermetic seal Not applicable.

Leakage· Not applicable.

Insulation resistance. 1 x 10^9 ohms, minimum.

Contact insulator captivation· Applicable, torque shall be 1 inch-pound.

Salt spray (corrosion) Applicable.

Connector durability Applicable.

Contact resistance (milliohms, maximum).

	Initial	After environment
Inner conductor contacts	12.0	16.0
Outer conductor contacts.	1.0	Not applicable
Braid to body·	1.0	Not applicable

Dielectric withstanding voltage 1,000 Vrms, minimum, at sea level.

Vibration, high frequency. Applicable.

Shock (specified pulse) Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:45Z
Check the source to verify that this is the current version before use.

Temperature cycling: Applicable.

Humidity: Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2 x 10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force: 13 pounds, minimum.

Coupling nut retention: 35 pounds, minimum.

Marking: In accordance with MIL-C-3655.
Part number: M3655/18-0001.

Qualification: Required.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3087-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-3655/18

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN. DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:45Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:45Z
Check the source to verify that this is the current version before use.