INCH POUND

MIL-L-3661B
AMENDMENT 4
09 December 1991
SUPERSEDING
AMENDMENT 3
17 February 1972

MILITARY SPECIFICATION

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT LENSES, GENERAL SPECIFICATION FOR

This amendment forms a part of MIL-L-3661B, dated 27 March 1967, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Paragraph 1.2.1: In the example, delete "LH72" (Style 1.2.1.1) and substitute "LH79" (Style 1.2.1.1).

Paragraph 1.2.2: Delete the example and substitute

"LC23 (Style 1.2.2.1) B (Color 1.2.2.2) D (Transmittance 1.2.2.3) 3 (Lens material 1.2.2.4)".

Delete "FSC 6250, 6210," and substitute "FSC 6210".

PAGE 2

Paragraph 1.2.2.3: In Note 3 of Table II, delete "glass or".

Paragraph 1.2.2.4: In Table III, delete "Symbol 1" and "Glass (-65°C. to +200°C.)".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:48Z
Check the source to verify that this is the current version before use.

PAGE 2

Paragraph 1.2.2.4: Add "(see 3.2)".

Paragraph 1.2.3: In the example, delete "BT1" (1.2.2.2 to 1.2.2.4) and substitute "BT2" (1.2.2.2 to 1.2.2.4).

In the title and in the body of the paragraph, delete "non-replaceable" and substitute "non-removable".

PAGES 3 AND 4

2.1 and 2.2 Delete: "MIL-P-17091, MIL-M-19887, MIL-M-20693," which have been superseded by ASTM D4066.

Add: "AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM D4066 - Nylon Injection and Extrusion Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)"

Delete: "MIL-C-45662," which has been superseded by MIL-STD-45662.

Add: "MIL-STD-45662 - Calibration Systems Requirements."

Below "MIL-STD-108": Add "MIL-STD-129 - Marking for Shipment and Storage."

Delete: "MIL-STD-456," which has been superseded by MIL-STD-1285.

Add: "MIL-STD-1285 - Marking of Electrical and Electronic Parts."

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:48Z
Check the source to verify that this is the current version before use.

PAGE 5

Paragraph 3.3.4, after "Plastic material": Add "(not applicable for lenses)".

Paragraph 3.4.2.1, third and fourth lines: Delete "unlless" and substitute "unless".

Paragraph 3.4.3, after "permitted": Add "unless otherwise specified on the specification sheet (see 3.2)."

PAGE 6


Paragraph 3.4.6, third and fourth lines: Delete "...shall have a ± 20 percent tolerance" and substitute "....shall have a tolerance not to exceed ± 20 percent".


Paragraph 3.4.9.2.2, Point 1: Delete ".075" for X-Axis and ".240" for Y-Axis and substitute ".065" and ".220" respectively. Point 4: Delete ".160" for X-Axis and ".244" for Y-Axis and substitute ".165" and ".270" respectively.

PAGE 7

Paragraph 3.4.10.1.1, sixth and seventh lines: Delete and substitute "....sockets, and .187 inch minimum, .234 inch maximum for candelabra bayonet lamp sockets (see figure 1)."

Figure 1: Delete "Candelabra Lamp Sockets" figure and substitute the attached "Candelabra Bayonet Lamp Sockets" figure.

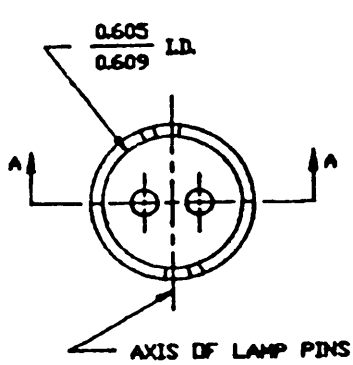

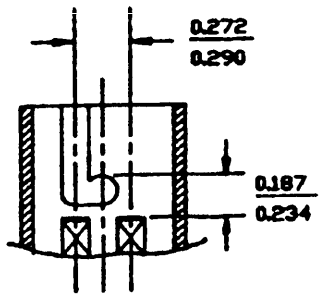

INCHES	mm
.187	4.75
.234	5.94
.272	6.91
.290	7.37
.605	15.37
.609	15.47

NOTE: ALL DIMENSIONS IN INCHES

CANDELABRA BAYONET LAMP SOCKETS
FIGURE 1. Moving Contacts

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:48Z
Check the source to verify that this is the current version before use.

PAGE 8

Paragraph 3.5.7: Delete and substitute "Contact resistance (not applicable to non-removable lens type indicator lights, or to lamp housings with integral resistors)."

Paragraph 3.5.8: Add subparagraph "(d) Submidget flange base lamps, 6-9 ounces."

PAGE 9

Paragraph 3.5.10: Delete "Sealings" and substitute "Sealing".

PAGE 11

Paragraph 4.5, in the first sentence: Delete "Naval Ship Engineering Center" and substitute "Government."

PAGE 13

Table VI, for contact resistance and dielectric withstanding voltage: Add major defect AQL of "1.0" and minor defect AQL "---".

Paragraph 4.6.4, third sentence: Delete "non-replaceable" and substitute "non-removable". Add "as defined in 4.5.3.2" to the third sentence.

PAGE 16

Paragraph 4.7.5, subparagraph (c): Delete "glass" and substitute "materials".

Paragraph 4.7.8.1: Delete first sentence and substitute "The contact resistance of lampholders, indicator lights and indicator-light housings, accommodating T-1 submidget flange base lamps and T-1-3/4 midget flange base lamps, T-3-1/4 bayonet base lamps and double contact candelabra base lamps, shall be tested in accordance with 4.7.8 and as follows:".

PAGE 17

Paragraph 4.7.8.1, subparagraph (c): Add "(open circuit voltage)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:48Z
Check the source to verify that this is the current version before use.

Figure 2: Delete and substitute the attached figure 2.

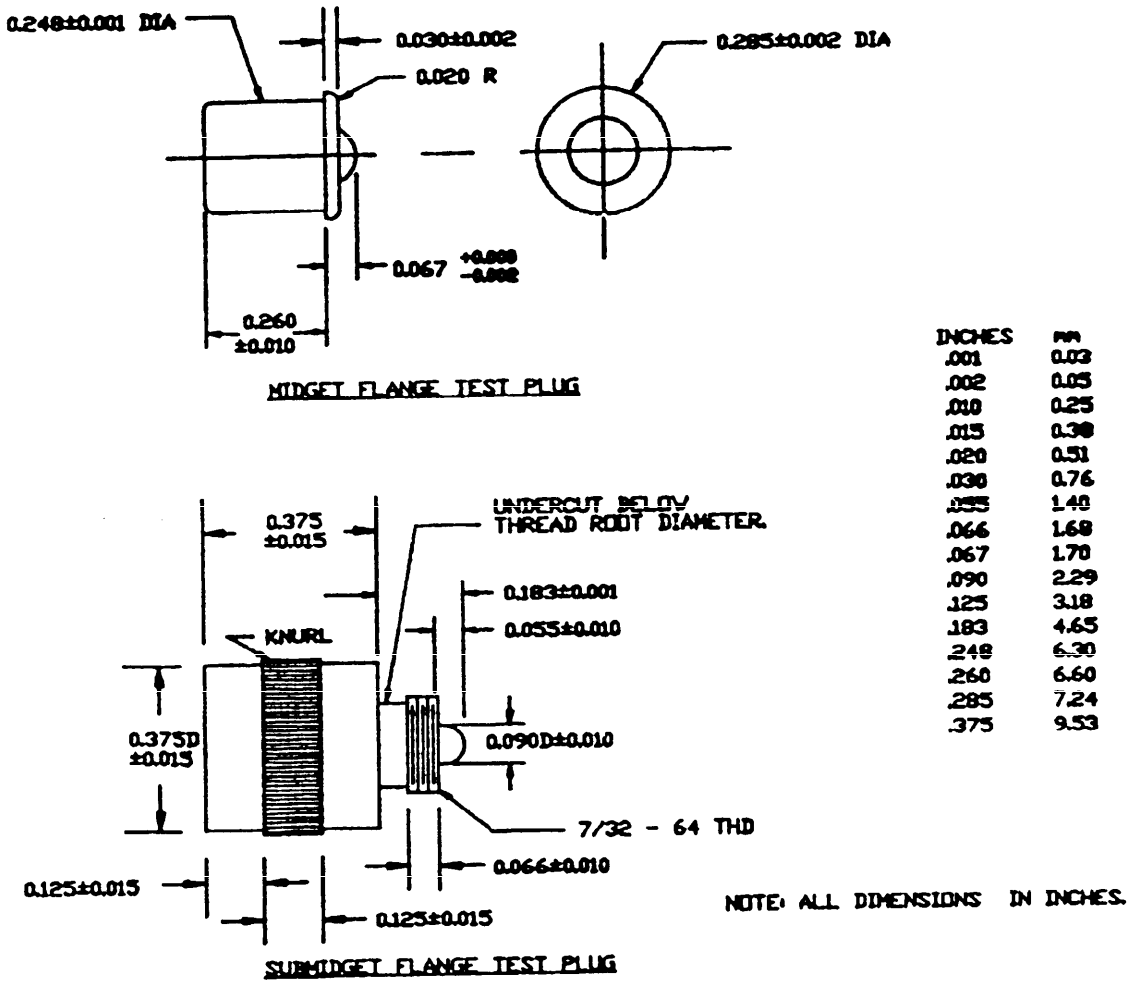


FIGURE 2. Midget and submidget flange base test plugs


PAGE 18

Paragraph 4.7.8.2, subparagraph (c): Add "(open circuit voltage)".

Source: https://assist.dla.mil -- Downloaded: 202610-16T20:48Z
Check the source to verify that this is the current version before use.

Figure 6: Delete and substitute the attached figure 6.

INCHES	mm
.001	0.03
.002	0.05
.015	0.38
.031	0.79
.067	1.70
.078	1.98
.122	3.10
.125	3.18
.270	6.86
.438	11.13
.500	12.70
1.500	38.10

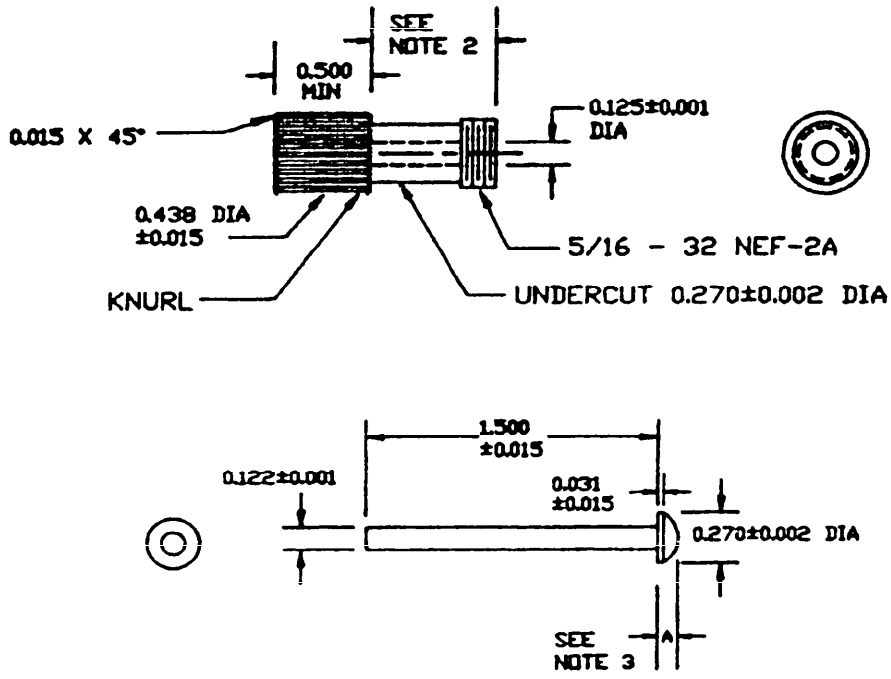


TEST PLUG MIDGET-FLANGE

NOTES:
1. ALL DIMENSIONS IN INCHES.
2. THE SHANK LENGTH SHALL BE AS REQUIRED (SEE 3.2).
3. FOR INCANDESCENT A = 0.067 + 0.000 − 0.002
   FOR NEON A = 0.078 + 0.000 − 0.002

FIGURE 6. Test plugs for midget and subminiature-flange base indicator light housings (contact spring pressure test).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:48Z
Check the source to verify that this is the current version before use.

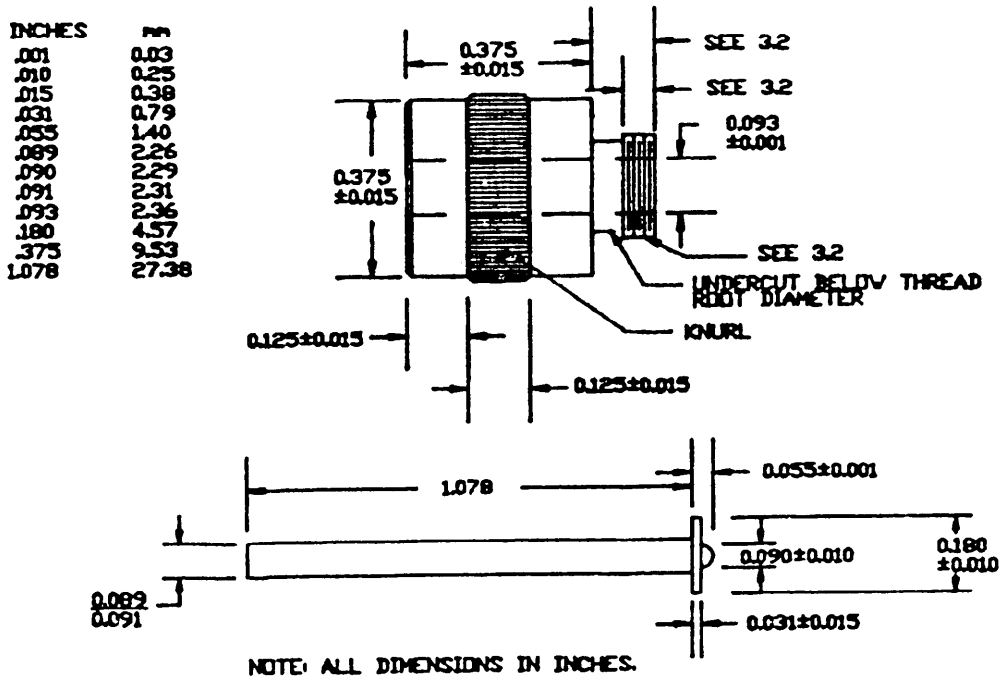

TEST PLUG FOR SUBMIDGET-FLANGE-BASE-INDICATOR-LIGHT HOUSINGS

FIGURE 6. Test plugs for midget and subminiget-flange-base-indicator-light housings (contact-spring-pressure test)

PAGE 20

Paragraph 4.7.9.1: Delete and substitute

"4.7.9.1 Flange base holders.

4.7.9.1.1 Midget flange base holders. For midget flange base holders, a test plug and test plug plunger (see figure 6) shall be assembled (such that the shoulder of the plunger seats on the threaded end of the plug) and the test plug shall be inserted to maximum engagement (minimum depressed position). The spring force shall then be measured and shall be within the minimum spring pressure specified. The test plug plunger shall be depressed 0.032 ±.002 and the spring force shall again be measured and shall not exceed the maximum spring pressure specified. Lampholder springs shall then be subjected to a

Source: https://assist.dla.mil -- Downloaded: 20260-16T20:48Z
Check the source to verify that this is the current version before use.

minimum of 500 cycles of operation from the minimum depressed position to .032 ±.002 past the minimum depressed position. Following the 500 cycles, minimum spring force shall again be measured and shall be as specified.

4.7.9.1.2 Submidget flange base holders. For submidget flange base holders, a test plug and test plug plunger (see figure 6) shall be assembled (such that the shoulder of the plunger seats on the threaded end of the plug) and the test plug shall be inserted to maximum engagement (minimum depressed position). The spring force shall then be measured and shall be within the minimum spring pressure specified. The test plug plunger shall then be depressed 0.030 ±.002 for incandescent bulb units; the spring force shall again be measured and shall not exceed the maximum spring pressure specified. Lampholder springs shall then be subjected to a minimum of 500 cycles of operation from the minimum depressed position to 0.030 ±.002 past the minimum depressed position. Following the 500 cycles, minimum spring force shall again be measured and shall be as specified."

PAGE 21

Paragraph 4.7.10.4, subparagraph (c), after "2 pound-inches": Add "nor be less than 2 ounce-inches".

PAGE 22

Paragraph 4.7.12, subparagraph (c): Delete the last sentence.

Paragraph 4.7.13: Delete the first sentence and substitute "Indicator lights with removable lenses shall be mounted on a 1/8-inch aluminum panel and shall be subjected to 1,000 hours of continuous operation with the lamp of the highest wattage, operated at its maximum voltage, the holder will accommodate."

PAGE 23

Paragraph 4.7.16, subparagraph (c): Add "Unless otherwise specified (see 3.2)".

Paragraph 4.7.17.1, subparagraph (b): Delete and substitute "Test-condition - B".

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:48Z
Check the source to verify that this is the current version before use.

PAGE 24

Paragraph 4.7.17.1, subparagraph (e): Delete "(Lamp failure excluded)".

PAGE 25

Paragraph 5.2.1.1: Delete and substitute

"5.2.1.1 Preservation, packaging, and packing. Lampholders, indicator lights, indicator light housings and lenses shall be preserved and packaged level A or C, packed level A, B, or C in accordance with MIL-E-17555, as specified (see 6.2)."

Add paragraph:

"5.3 Marking. Marking shall be in accordance with MIL-STD-129."

PAGE 26

Table IX: Add the reference to note "1/" to the table title "Grouping of Metals".

Below table IX: Add "1/ Solder used for terminal coating is not considered dissimilar with any of the above groupings."

Paragraph 6.4, third sentence: Delete and substitute "The activity responsible for the qualified products list is the Naval Electronic Systems Command; however, information pertaining to qualification of products may be obtained from the Defense Electronics Supply Center, ATTN: DESC-EQ, Dayton, OH 45401." Fourth sentence: Delete "'Provisions Governing Qualification'" and substitute "'Provisions Governing Qualification (SD-6)'".

Paragraph 6.4.1: Delete "'Provisions Governing Qualification'" and substitute "'Provisions Governing Qualification (SD-6)'". Delete "Naval Supply Depot" and substitute "Naval Publications and Forms Center".

PAGE 27

Paragraph 6.5.4: Delete "glass or".

Source: https://assist.dla.mil -- Downloaded: 202610-16T20:48Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this amendment are marked with an asterisk to indicate
where a change (addition, modification, correction, deletion) from the previous amendment was made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements
of this document based on the entire content irrespective of the marginal notation and relationship to the last previous amendment.

Custodians:
Navy - EC
Air Force - 99

Review activities:
Army - AR, EA, MI
Air Force - 82
DLA-GS

User activities:
Army - ME
Navy - MC, AS, OS, SH

Preparing activity:
Navy - EC

Agent:
DLA-GS

(Project 6210-1043)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:48Z
Check the source to verify that this is the current version before use.