INCH-POUND

MIL-DTL-3661/6D
09 April 2019


SUPERSEDING
MIL-L-3661/6C
05 February 1987


DETAIL SPECIFICATION SHEET

LAMPHOLDERS, INDICATOR-LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES DUSTTIGHT HOUSING, STYLE LH74

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

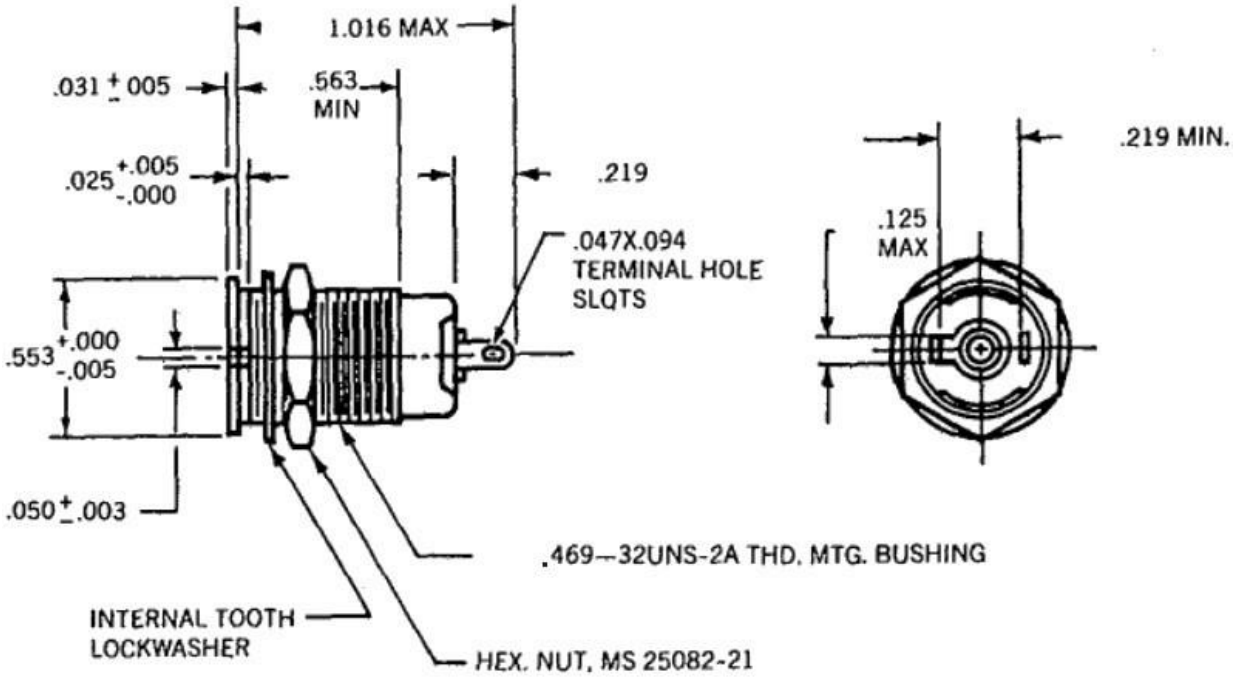



RECOMMENDED MOUNTING HOLE

inches	mm
.003	.08
.005	.13
.025	.64
.031	.79
.032	.81
.047	1.19
.050	1.27
.055	1.40
.059	1.50
.094	2.39
1/8	3.18

inches	mm
7/32	5.56
.219	5.56
.274	6.96
.278	7.06
11/32	8.73
.468	11.89
15/32	11.91
.472	11.99
.553	14.05
31/32	24.61

FIGURE 1. Design and Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ±.0312 inch.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.

REQUIREMENTS:

1. Design and construction: See figure 1.
2. Sand and dust: Meets the requirements of MIL-DTL-3661.
3. Shank length of plug gage: 0.407 (figure 6 of MIL-DTL-3661).

FIRST ARTICLE INSPECTION:

TABLE I

Type designation	Test MIL-DTL-3661	Extent of approval
LH74/1	(12 sample units or as specified) All tests of Table IV	All
LH74/2, LH74/6, LH74/5, LH74/7	(2 sample units or as specified) Group I of Table IV Visual and mechanical examination only	

TABLE II

Type Designation	Internal Resistor	Mating Lens		Lamp Accommodation	
		No EMI Shield	EMI Shield		
LH74/1[2]	62K	LC13[4]	LC28[5]	Neon C7A (M15098/11-001)[1]	Bright
LH74/2[3]	27K	LC13[4]	LC28[5]	Neon C9A (M15098/11-002)[1]	Bright
LH74/5	22K	LC13[4]	LC28[5]	Neon C9A (M15098/11-002)[1]	Bright
LH74/6	33K	LC13[4]	LC28[5]	Neon C9A (M15098/11-002)[1]	Long Life
LH74/7	100K	LC13[4]	LC28[5]	Neon C7A (M15098/11-001)[1]	Long Life

[1] In accordance with MIL-DTL-15098/11
[2] LH74/3 replaced by LH74/1
[3] LH74/4 replaced by LH74/2
[4] In accordance with MIL-L-3661/13
[5] In accordance with MIL-L-3661/28

Referenced documents. In addition to MIL-DTL-3661, this document references the following:
MIL-L-3661/13
MIL-L-3661/28
MIL-DTL-15098/11
MS25082

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy - AS

Preparing activity:
DLA – GS2
(Project 6210-2019-011)

Reviewer:
DLA – IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.