INCH-POUND

MIL-DTL-3661/8C
8 August 2019

SUPERSEEDING
MIL-L-3661/8B
31 August 1989

DETAIL SPECIFICATION SHEET

HOUSINGS, INDICATOR-LIGHT, STYLE LH76

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

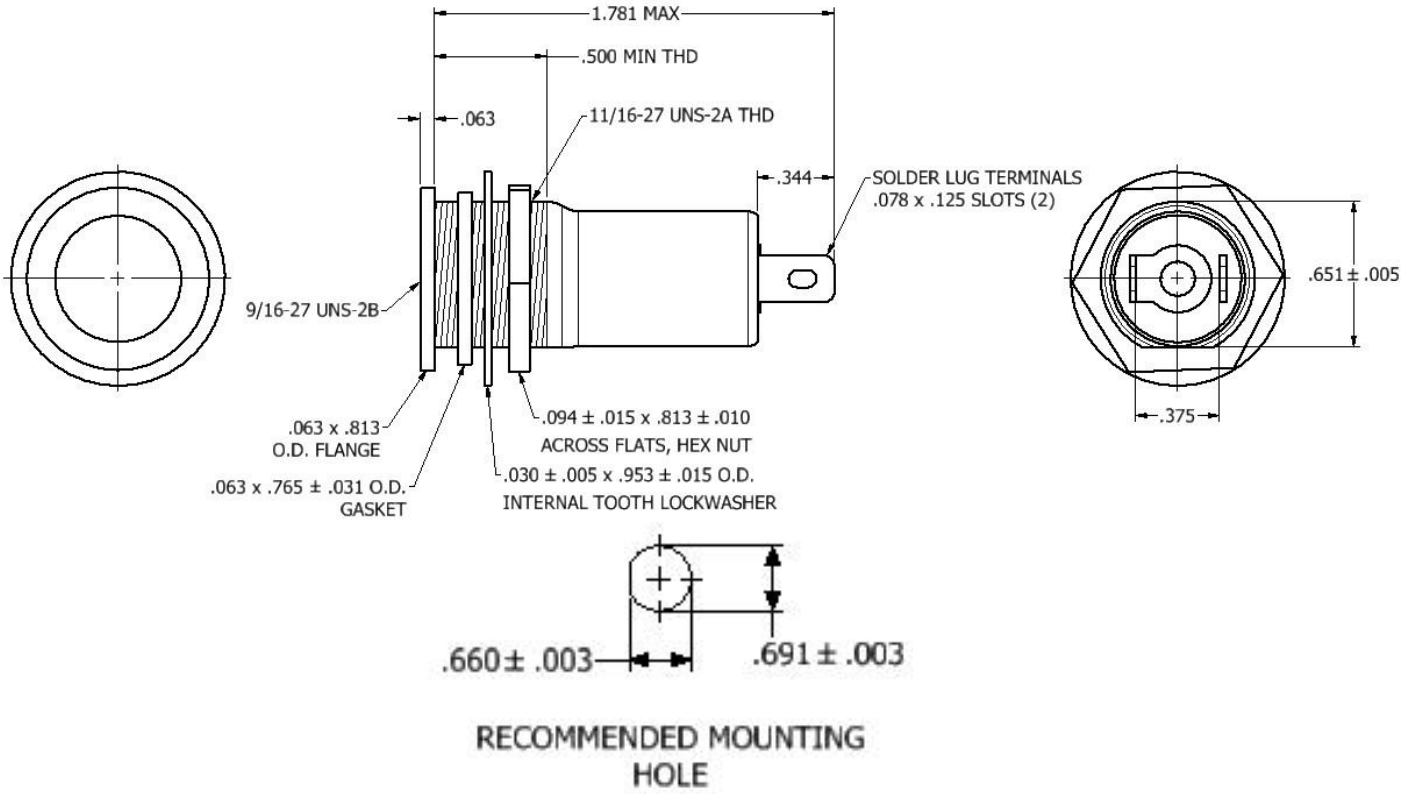


FIGURE 1. Dimensions and configuration

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.094	2.39	.688	17.46
.005	.13	.125	3.18	.691	17.55
.010	.25	.344	8.73	.765	19.43
.015	.38	.375	9.53	.813	20.64
.030	.76	.500	12.70	.953	24.21
.031	.79	.563	14.29	1.781	45.24
.063	1.59	.651	16.54		
.078	1.98	.660	16.76		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ± .031 inch.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.

REQUIREMENTS:

1. Design and construction: See figure.
2. Terminal strength: 5 pounds.
3. Socket shell torque: 2 pound-inches.

FIRST ARTICLE TESTING:

Table I

Type designation	Tests MIL-DTL-3661	Extent of approval
LH76/1	(12 sample units or as specified) All tests of Table IV	All
LH76/2 LH76/3	(2 sample units each or as specified) Group 1 of Table IV (Visual and mechanical examination only)	

Table II

Type designation	Mating lens	Internal resistor	Lamp accommodation T-3 1/4 miniature bayonet base
LH76/1	LC14[1], LC16[2], LC17[3] and LC18[4]	100K ohm	Neon M15098/10-001[7] (NE-51[5])
LH76/2	LC14[1], LC16[2], LC17[3] and LC18[4]	27K ohm	Neon M15098/10-002[7] (NE-51H[5])
LH76/3	LC14[1], LC16[2], LC17[3] and LC18[4]	None	Incandescent[6] M15098/10-001R[7] (NE-51R) M15098/10-002R[7] (NE-51HR)

[1] In accordance with MIL-L-3661/14.
[2] In accordance with MIL-L-3661/16.
[3] In accordance with MIL-L-3661/17.
[4] In accordance with MIL-L-3661/18.
[5] NE51 105V – 125V AC/DC. NE51H 100V-125V AC.
[6] Industry number 47 and 1815.
[7] In accordance with MIL-DTL-15098.

Referenced documents. In addition to MIL-DTL-3661, this document references the following:
MIL-L-3661/14
MIL-L-3661/16
MIL-L-3661/17
MIL-L-3661/18
MIL-DTL-15098

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army – CR4
Navy – AS
DLA – GS2

Preparing activity:

DLA – GS2
(Project 6210-2019-018)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.

Appendix: For reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.