INCH-POUND

A-A-55191

29 March 1993

COMMERCIAL ITEM DESCRIPTION

SHOULDER STRAP, SIDE ARM, MILITARY POLICE, LEATHER, BLACK

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-S-40022.

Abstract. This document covers a shoulder strap which is used with a leather belt and is a component of Military Police equipment. Shoulder straps are intended for use by members of the Military Police of the U. S. Army and are designed to support a leather holster which is attached to the base of the strap with a double hook.

Salient Characteristics.

The shoulder strap, side arm, shall be made of leather components, the grain side of the leather shall be dyed black, and smooth finished, insuring a long-lasting lustrous finish. The color of the flesh side shall be natural, flesh side edges shall be rounded, and skived. Item shall consist of a base, shoulder strap, standing loop, and sliding loop. Shoulder strap shall be fabricated with grain side of leather on exterior side, adjustment holes shall be 1/8 inch dia. with 3/4 inch equal spaces between 18 req'd holes. A fastener male and female portion (style 2A) shall be installed with male portion closest to end,

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

fastening on flesh side. Standing loop and a 7/8 inch wire buckle shall be secured to opposite end, and attached by machine stitching, standing loop will also be stapled or riveted to strap. Both standing and sliding loops shall be machine stitched. "D" rings shall be used to attached shoulder strap to base. Two sets of male, female snap fasteners shall be provided to both ends of base and snapped on flesh side. Base shall have two slots to accommodate belt, that is used with item. Bottom of base will have NO.4094 eyelet and NO.4096 washer (washer on flesh side) to accommodate holster. U.S. shall be indented in 3/8 inch characters on top, middle portion, of base. See figures 1 and 2 included within.

Material.

Leather. The shoulder strap and base shall be 1/8 inch thick leather with tolerances, plus 1/64 and minus 1/128, the leather shall conform to types I, II, III, or IV, class I of KK-L-271. The loops shall be 3/32 inch leather as above.

Thread, polyester. The stitching shall be, twisted soft multiple cord, normal elongation, general purpose polyester thread size 3, the thread shall be black and show good fastness to perspiration. All stitching shall conform to type 301 of FED-STD-751 with a 1/8 inch stitching margin.

Sealer. Edges of leather shall be finished using tragacanth gum sealer (commercial grade NO.3).

Buckle, wire, brass. The buckle shall be brass wire, 7/8 inch, conforming to type VI, class 1 of MIL-B-2331.

Eyelet and washer, brass. The eyelet NO.4094 and washer NO.4096, style A shall conform to MIL-E-20652 and shall be natural bright brass followed by a coating of lacquer.

Fastener, snap, brass. Snap fastener shall conform to style 2A of MIL-F-10884, female components shall consist of a socket and a size 2 button except that the barrel of the button shall be of sufficient length to provide a full roll to hold the socket firmly. The male components shall consist of a stud and size 2 eyelet, snap fastener shall be in accordance with finish 2 (black enamel cap).

Staple, corrosion-resisting steel. Staple used for attaching standing loop, used as an alternate method of closing the sliding loop, it shall be corrosion-resisting steel wire conforming to condition B or C of QQ-W-423. The leg length of the staple shall be sufficient to penetrate the required thickness of leather with allowance for a minimum clinch of 1/16 inch and a maximum clinch of 1/8 inch.

Rivet, tubular, brass. Alternate method of attaching the standing loop, 9/64 inch nominal diameter 7/16 inch long conforming to type XII, class 2, grade F of FF-R-556. The rivet shall be star clinched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Rivet, side prong, brass. Alternate method of closing the sliding loop, 5/16 inch long conforming to E. P. Stimpson Company No. P407 or equal

Ring, dee. The dee ring shall conform to class 1, 1 inch by 7/8 inch, configuration W of MIL-R-3390, bright brass will be followed by a coating of lacquer.

Label/marking. The label/marking shall be in accordance with the contract number and marking "US" shall be indented in the leather in the size characters and in the locations shown on the drawing.

Workmanship. After completion, the finished shoulder strap, side arm shall be thoroughly cleaned, and all loose thread and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Shoulder straps lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The shoulder straps shall be examined for the defects listed below. The lot size shall be expressed in units of shoulder straps. The sample unit is one strap. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Defects. The shoulder strap, side arm shall be examined for the following defects: any hole, cut, tear, color not as specified; any spot or stain (outside); thread ends not removed; measurement of item not as specified; edges of leather not rounded and skived on flesh side; any component not fabricated of the specified material; not fabricated with grain side of leather on exterior side of shoulder strap; any fastener not functioning properly; wrong stitch type; markings omitted, illegible, incorrect, not specified type or size, misplaced, or not applied in specified manner.

Dimensional Examination. The finished shoulder straps shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one strap; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 1.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Custodian:
Army - GL
Air Force - 82

Review Activity:
Army - MD
Air Force - 11

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8465-0115

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

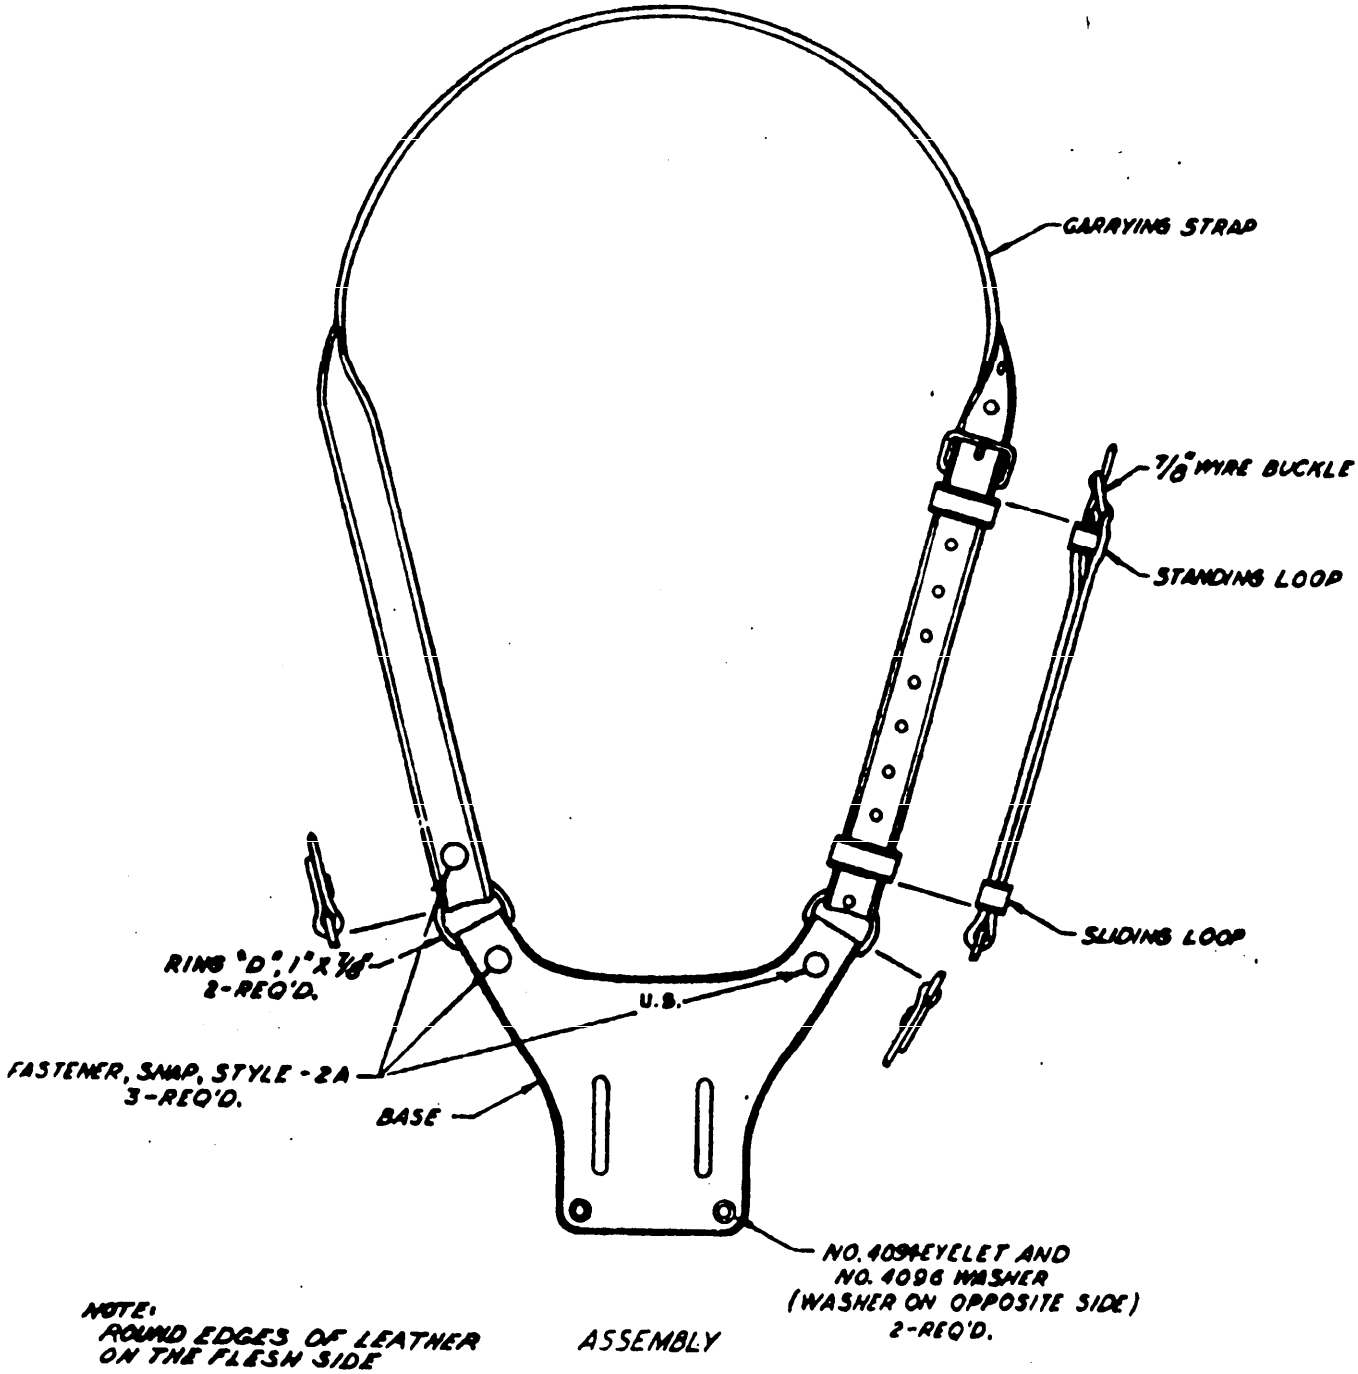


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

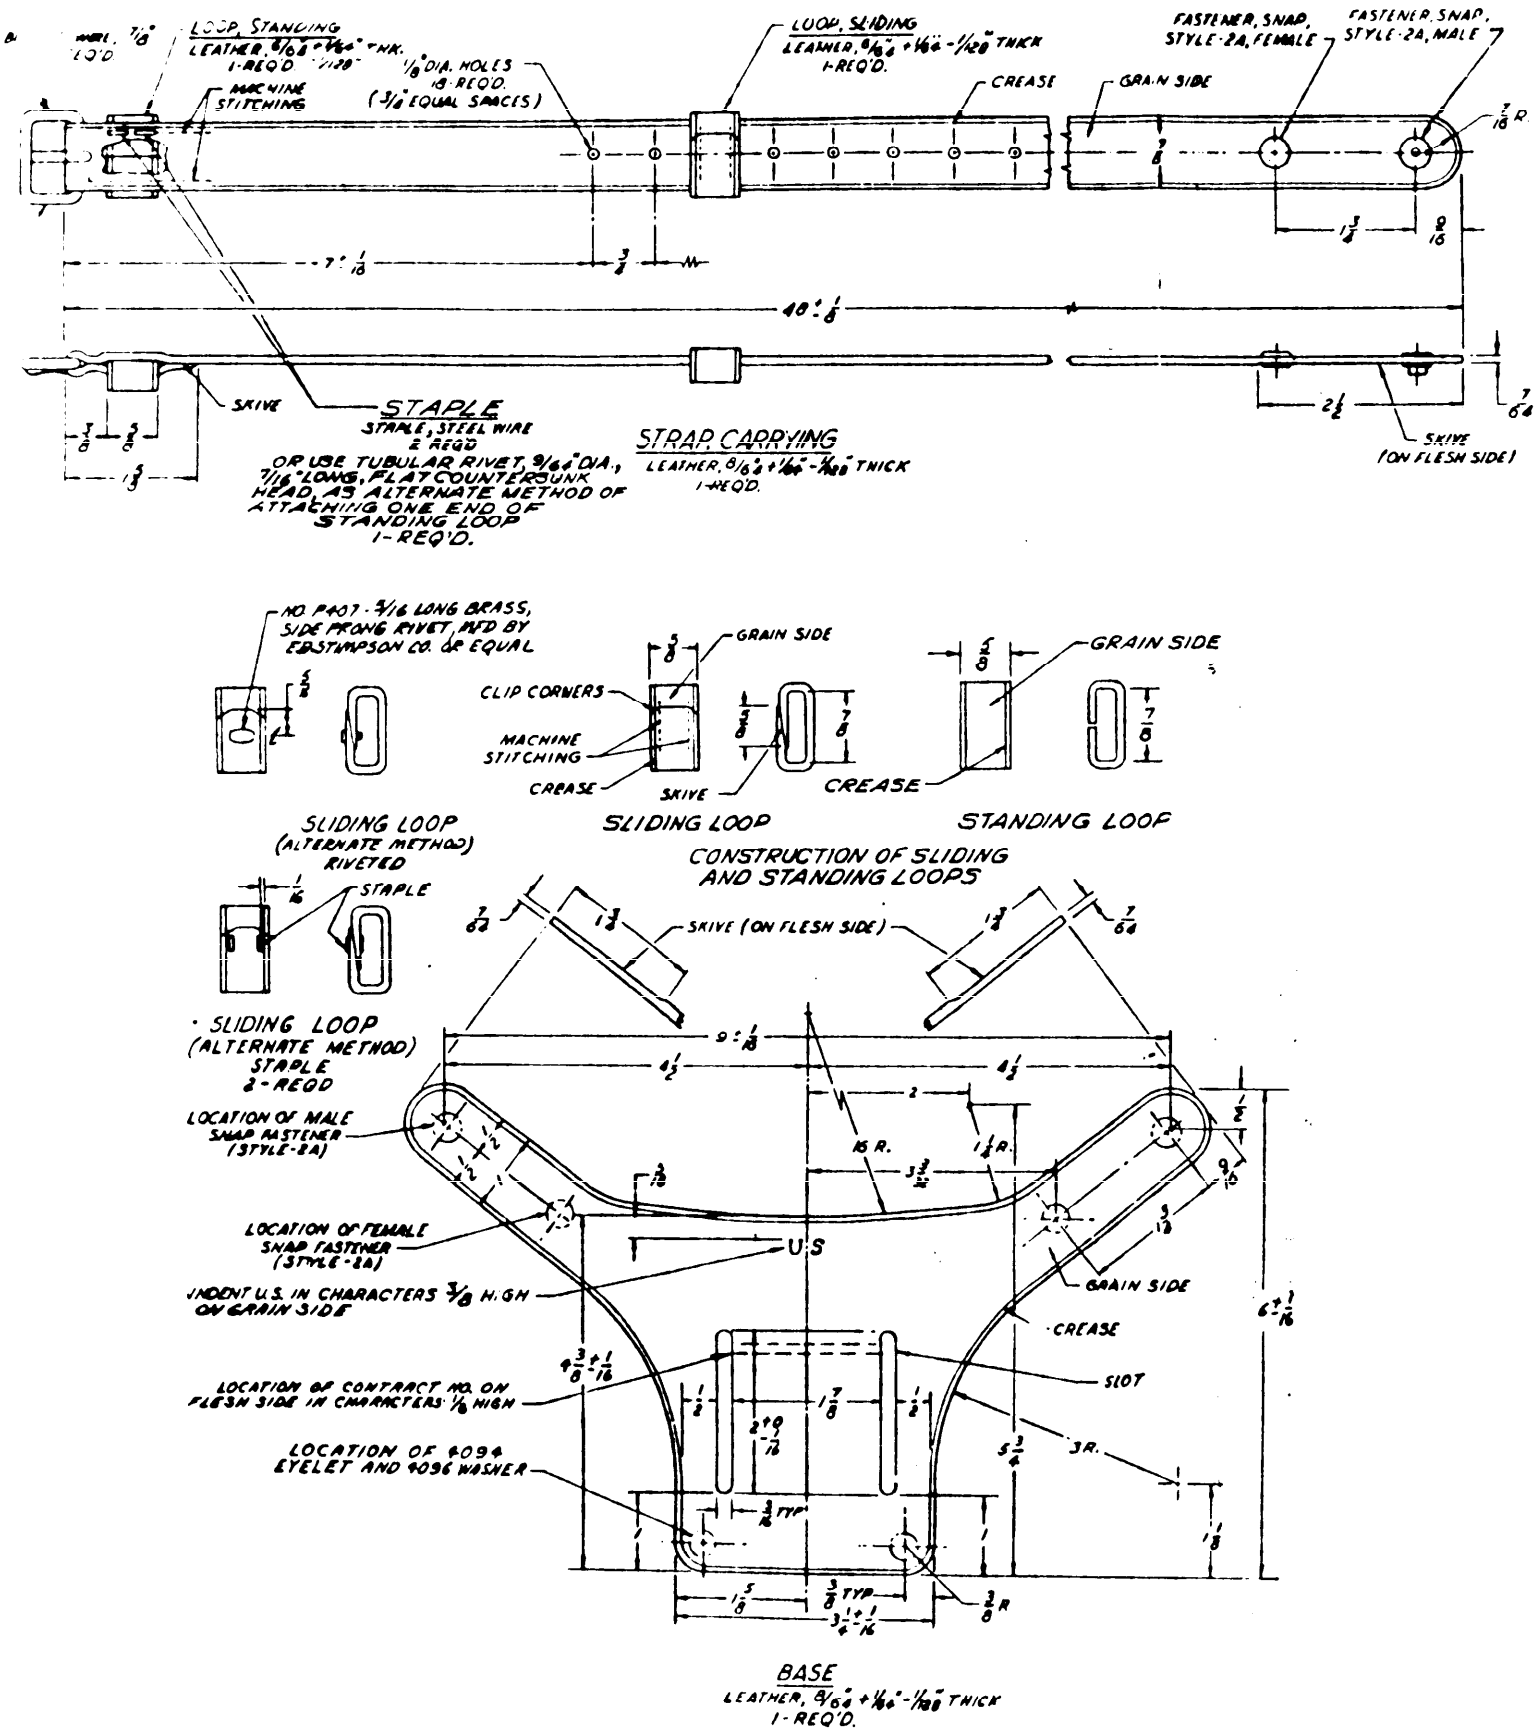


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55191	93-03-29

3. DOCUMENT TITLE

SHOULDER STRAP, SIDE ARM, MILITARY POLICE, LEATHER, BLACK

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defence Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P.O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.