INCH-POUND
A-A-60027A
March 2, 2026
SUPERSEDING
A-A-60027
December 2, 2021

COMMERCIAL ITEM DESCRIPTION

UNDERSHIRT, NURSING

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers the requirements for a nursing undershirt for wear by postpartum nursing female military personnel of the Department of Defense.

2. CLASSIFICATION. The undershirt covered by this commercial item description shall be one type and available in the following classes and sizes, as specified (see 7.3).

2.1 Classes.

Class 1 – OD Green 522
Class 2 – Tan 499
Class 3 – Blue CG 3362
Class 4 – White
Class 5 – Brown 3760
Class 6 – Black 557

2.2 Sizes.

X-Small
Small
Medium
Large
X-Large
XX-Large

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-MA-STDS or emailed to USMC_STDZ@usmc.mil, with the subject line "Document Comment". Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 8425

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The nursing undershirt shall be a crew neck style with rib knit trim, a crop front overlay, and a hemmed bottom and hemmed sleeves. The neck trim shall be double-ply rib knit material and finished to 1 inch in width. The underlay shall be a faux wrap style (see figures 1 through 4). When specified in the contract or purchase order (see 7.3), the front of the class 6 undershirt shall include the word "ARMY" in gold lettering (see figure 5).

3.2 Standard sample. The finished undershirt shall match the standard sample, as applicable to the specified class, for appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced. Shade standard information shall be as specified in the contract or order (see 7.3).

3.2.1 Class 1 color. The color of the class 1 undershirt shall be a good match to OD Green 522.

3.2.2 Class 2 color. The color of the class 2 undershirt shall be a good match to Tan 499.

3.2.3 Class 3 color. The color of the class 3 undershirt shall be a good match to Blue CG 3362.

3.2.4 Class 4 color. The color of the class 4 undershirt shall be a good match to a white shade, as specified in the contract or order (see 7.3).

3.2.5 Class 5 color. The color of the class 5 undershirt shall be a good match to Brown 3760.

3.2.6 Class 6 color. The color of the class 6 undershirt shall be a good match to Black 557.

3.3 Materials.

3.3.1 Basic material. The basic material for the undershirt shall be a jersey knit and shall conform to the requirements in table I and 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE I. Material requirements and end item requirements – all classes. [1/]

Characteristic	Requirement	Test Method
Fiber content, percent	Synthetic and cotton blend, not exceeding 50 percent synthetic	AATCC TM20A
Weight, ounces per square yard	3.0 to 4.5	ASTM D3776/D3776M, Option C
Bursting strength, pounds (minimum)	40	ASTM D6797
Dimensional stability, after 5 laundering cycles, percent (maximum)		
Wales	8.0	AATCC TM135 (1)(IV)(Ai)
Courses	5.5	
Colorfastness, rating (minimum)		
Laundering, 3 cycles [1/]		
Color change	4	AATCC TM61, Test 2A and AATCC EP1
Staining, all fibers	4	AATCC TM61, Test 2A and AATCC EP2
Light (40 AATCC fading units)	3	AATCC TM16.3, Option 3 and AATCC EP1
Crocking (dry and wet)	3	AATCC TM8 and AATCC EP8
Moisture vapor transmission, grams per meter squared (g/m^2) per 24 hours (minimum)		
Initial	1550	ASTM E96/E96M
After 5 laundering cycles [1/]	1450	AATCC TM135 (1)(IV)(Ai) and ASTM E96/E96M
Pilling, after 5 laundering cycles, rating (minimum) [1/]	4	AATCC TM135 (1)(IV)(Ai) [3/]
Visual shade matching		
Daylight D65 (6500±200 Kelvin [K]) (with illumination of 100±20 foot candles) [4/]	Good match to standard sample	AATCC EP9, Option C [5/]
Incandescent (2856±200K)	Good match to standard sample	AATCC EP9, Option C [5/]
End item tests		
Seam smoothness, rating (minimum)	SS-3	AATCC TM143 or TM88B(1)(IV)(Ai)
Seam strength, pounds (minimum)	80	ASTM D6797 [2/]

FOOTNOTES:

[1/] Material tests may be conducted on swatches removed from laundered end items, when appropriate. Laundering shall have no detrimental effect on the durability of the materials.

[2/] The procedure for ASTM D6797 shall be followed except that knit seam strength shall be evaluated, with the seam in the middle and facing up. Seam strength shall be measured at the hems, shoulder, and underarm seams.

[3/] Pilling visual appearance shall be measured using the pilling standard scale in ASTM D3511/D3511M.

[4/] See 7.4.1.

[5/] See 7.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3.3.2 Neck trim material. The neck trim material shall be a 1 x 1 rib knit material made of a synthetic and cotton blend, not exceeding 50 percent synthetic. Materials that have a tendency to cause latent tendering or yellowing of the material shall not be used in any of the dyeing or finishing operations. Resin finishes shall not be used. The material shall be preshrunk and the material shall conform to the requirements in table II and 3.3.3.

TABLE II. Neck trim requirements.

Characteristic	Requirement	Test Method
Construction		
Wales per inch	32±1	ASTM D8007
Courses per inch	24±1	ASTM D8007
Dimensional stability, after 5 laundering cycles, percent		
Wales	±10	AATCC TM135 (1)(IV)(Ai)
Courses	±10	AATCC TM135 (1)(IV)(Ai)
Colorfastness, rating (minimum)		
Laundering, 3 cycles 1/		
Color change	4	AATCC TM61, Test 2A and AATCC EP1
Staining, all fibers	4	AATCC TM61, Test 2A and AATCC EP2
Light (40 AATCC fading units)	3	AATCC TM16.3, Option 3 and AATCC EP1
Crocking (dry and wet)	3	AATCC TM8 and AATCC EP8

FOOTNOTE:

1/ Laundering shall have no detrimental effect on the durability of the materials.

3.3.3 Labile sulfur. Dyes and compounds containing sulfur capable of oxidation to sulfuric acid shall not be used. The material shall be "Free" (see 3.3.3.1.a) of labile sulfur when tested as specified in 3.3.3.1.

3.3.3.1 Presence of labile sulfur test. In the determination of labile sulfur in textile materials with lead acetate, two 1.50±0.01-gram samples from each material submitted for evaluation shall be tested. Each of the two samples shall be cut into very small pieces and placed into separate test tubes. The samples shall be submersed in a stannous chloride solution that contains 100 grams of American Chemical Society (ACS) grade stannous chloride crystals in 100 milliliters of ACS grade hydrochloric acid (35 percent concentration) and 50 milliliters of distilled water. A filter paper wet out with a 5.0 percent lead acetate solution shall be placed over the top of the test tube. The lead acetate solution shall contain 5.0 grams of chemically pure (CP) reagent grade lead acetate and enough distilled water to make up a 100-milliliter solution; if the solution is not clear, a few drops (one at a time) of glacial acetic acid shall be added until the solution is clear. The test tube containing the textile sample, stannous chloride, and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

a. Free – the filter paper shows no discoloration or staining of any kind.
b. Slight – the filter paper shows a light tan to light brown discoloration stain.
c. Moderate – the filter paper shows a dark brown discoloration stain.
d. Severe – the filter paper shows a black discoloration stain.

The rating shall be recorded. The results shall be recorded as "pass" or "fail".

3.3.4 Thread. Thread for all seaming and stitching shall be in accordance with standard commercial practice. The color of the thread shall be a good match to the basic material and shall meet the colorfastness requirements specified for the basic material. The finished thread shall have no chemical finishes or treatments, other than those commonly used on commercial threads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3.4 Lettering.

3.4.1 ARMY. When specified in the contract or order (see 7.3), the front of the black (class 6) undershirt shall have the word "ARMY" in gold lettering (see figure 5). The top of the lettering shall be positioned 2 (±1/4) inches below the center front neckband joining seam. The lettering shall be centered horizontally on the front of the undershirt. The color of the lettering shall be a close match to Army Gold 558. The finished printed text shall match the provided design for size and finished appearance (see 7.3). Text design file may be obtained from the contracting activity. The lettering shall be applied by heat transfer method or printing and shall not delaminate, crack, peel, or change shade when tested as specified in 3.9. The size of the finished lettering is dependent upon the size of the shirt, as follows:

For sizes X-Small and Small

Letter Height	2-3/4 (±1/4) inches
Total Length of ARMY	11 (±1/4) inches
Letter Thickness	1/2 (±1/8) inch

For sizes Medium through XX-Large

Letter Height	3 (±1/4) inches
Total Length of ARMY	12 (±1/4) inches
Letter Thickness	5/8 (±1/8) inch

3.5 Stitches. The collar attachment, sleeve hem and bottom hem shall use a type 406 stitch.

3.6 Labels.

3.6.1 Label and marking. A label meeting the requirements of MIL-DTL-32075, type III, class 14, shall be placed at the upper back inside of the undershirt, centered and 1/2 inch below the seam join of the neck trim and back panel. The label shall include manufacturer's style number, lot number, and manufacturing date. If service-specific markings are requested, these should be specified in the contract or purchase order (see 7.3).

3.6.2 Bar code label. The undershirt shall be coded with a tag meeting the specifications of MIL-DTL-32075, type VIII, class 17; alternatively, a label meeting the requirements of type VII, class 17 may be adhered to the outside of the individual bag.

3.7 Figures. Figures 1 through 5 are furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figures, the written document shall govern.

3.8 Finished measurements. The undershirts shall conform to the finished measurements in table III when measured in accordance with the guidance in table IV. Garments shall be laid flat, allowed to rest, and measurements shall be taken from the wearer's left without stretching or bunching. The sizes may be abbreviated as XS, S, M, L, XL, and XXL.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements (inches).

Measurement	Tol.	X-Small	Small	Medium	Large	X-Large	XX-Large
A Neck Opening	±1/2	7	7-1/4	7-1/2	7-3/4	8	8-1/4
B Across Shoulder	±1/2	17-1/4	17-3/4	18-1/4	18-7/8	19-1/2	20-1/8
C Front Neck Drop	±1/4	3	3-1/8	3-1/4	3-3/8	3-1/2	3-5/8
D Back Neck Drop	±1/8	1-1/4	1-3/8	1-1/2	1-5/8	1-3/4	1-7/8
E Front Overlay Yoke Height	±1/4	17	17-1/4	17-1/2	17-3/4	18	18-1/4
F Front Neck Drop Underlay	±1/4	8-3/4	9	9-1/4	9-1/2	9-3/4	10
G Sleeve Length	±1/2	6-1/2	6-3/4	7	7-1/4	7-1/2	7-3/4
H Sleeve Opening Half Width	±1/2	6-3/4	7-1/8	7-1/2	8	8-5/8	9-1/4
I Length at Front High Point Shoulder	±1/2	26-1/2	27	27-1/2	28	28-1/2	29
J Half Chest	±1/2	18	19	20	21-1/4	22-1/2	23-1/2
K Bottom Half Sweep	±1/2	19	20	21	22-1/4	23-1/2	24-1/2





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished measurement guidance [1/].

Measurement	Description	Measurement Guidance
Neck Opening (see table III, A)	Measurement from the high point shoulder (HPS) [2/] straight across to opposite HPS.	
Across Shoulder (see table III, B)	Measurement straight from wearer's left shoulder seam join point to wearer's right shoulder seam join point.	
Front Neck Drop (see table III, C)	Measurement from a line formed by a straightedge from HPS to HPS [2/] to center front of seam join of neck trim at front neckline.	
Back Neck Drop (see table III, D)	Measurement from a line formed by a straightedge from HPS to HPS [2/] to center of seam join of neck trim at back neckline.	
Front Overlay Yoke Height (see table III, E)	Measurement taken from HPS [2/] at front straight down to the bottom edge hem of overlay crop.	
Sleeve Length (see table III, G)	Measurement from outer shoulder seam join of sleeve to the bottom of sleeve opening along natural fold.	
Sleeve Opening Half Width (see table III, H)	Measurement along sleeve opening, edge to edge at natural fold.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished measurement guidance [1/] – Continued.

Measurement	Description	Measurement Guidance
Length at Front High Point Shoulder (see table III, I)	Measurement taken from HPS [2/] at front straight down to the bottom edge.	
Half Chest (see table III, J)	Measurement taken 1 inch below armhole measured straight across, edge to edge.	
Bottom Half Sweep (see table III, K)	Measurement taken straight across the bottom from edge to edge at natural fold.	
Lettering Location (see 3.4)	Measurement taken below the center front of the collar. One half of the overall width measurement specified (see 3.4) shall be on each side of the center front of the shirt.	

FOOTNOTES:

1/ Measurement guidance figures are for information only and measurements shall be taken according to description provided.

2/ High point shoulder is at the junction of the shoulder seam and the collar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3.9 End item printing appearance. After the finished undershirt has been laundered 25 times in accordance with AATCC TM135 (1)(IV)(Ai), the appearance rating for the printing shall be as specified in table V.

TABLE V. Appearance rating.

Part	Requirement
ARMY Lettering	
Delamination, visual	no delamination
Discoloration, average rating	3.7 1/

FOOTNOTE:

1/ No individual observation shall be lower than a rating of "3".

3.10 Patterns. Commercial patterns shall be used and shall conform to the design requirements specified herein. Patterns shall be properly balanced when in accordance with the measurements listed in table III.

4. REGULATORY REQUIREMENTS. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. Unless otherwise specified in the contract or order (see 7.3), the products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The item offered must have been sold to the government or commercial market.

5.3 Visual examination. Undershirt samples shall be examined for the defects listed below. Unless otherwise specified in the contract or order, defects in excess of the manufacturer's own quality assurance standards may be cause for failure of the undershirt or production lot. Unless otherwise specified in the contract or order (see 7.3), all defects will be scored as specified in table VI for the purpose of acceptance of each individual shirt and for acceptance of the production lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE VI. Visual examination criteria.

Defect type	Description	Classification	
		Major	Minor
Material defects	Any hole, cut, or tear	X	
	Any mend		X
	Any drop stitch		X
	Any loose knit		X
	Any miss knit		X
	Any slub		X
	Any streak		X
	Any knitted in waste	X	
	Any permanent fold, pleat, or crease	X	
	Any spot or stain or discoloration	X	
	Any color not as specified	X	
	Any shaded part		X
	Any objectionable odor		X
Seams and stitching	Loose or tight stitching tension	X	
	Broken or missing thread or stitch	X	
	Needle chew	X	
	Any part caught in an unrelated operation or stitching	X	
	Raw edge		X
	Unrepaired thread breaks	X	
	Thread ends not removed		X
	Any seam puckered, distorted, or irregular	X	
	Any seam pleated	X	
	Any open seam	X	
Workmanship	Any component part omitted	X	
	Any component part twisted	X	
	Any component part not specified size	X	
	Any component part misplaced	X	
	Any component part poorly shaped	X	
	Any component part not lying flat	X	
Labels	Label(s) missing	X	
	Label(s) incorrect	X	
	Label(s) illegible	X	
	Bar code or UPC code label omitted	X	
	Bar code or UPC code label not readable by scanner		X
	Human-readable interpretation omitted	X	
	Human-readable interpretation illegible	X	
	Bar code not visible on folded, packaged item		X
	Bar code label causes damage to the item	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE VI. Visual examination criteria - Continued.

Defect type	Description	Classification	
		Major	Minor
Lettering on front [1/]	Letters missing	X	
	Letters misplaced or in position not as specified	X	
	Letters smeared	X	
	Letters wrinkled	X	
	Letters not cleanly or neatly applied	X	
	Letters color not as specified	X	
	Lettering design not as specified	X	
	Lettering dimensions not as specified	X	
	Delamination or peeling of letters [2/]	X	

FOOTNOTES:

[1/] As specified in 3.4.1.

[2/] Delamination of lettering is evaluated visually after 25 launderings.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Intended use. This undershirt is intended to be worn by post-partum nursing female military personnel.

7.2 Source of documents.

7.2.1 American Association of Textile Chemists and Colorists (AATCC). AATCC test methods are available from www.aatcc.org.

7.2.2 ASTM International. ASTM standards are available from www.astm.org.

7.2.3 Defense specifications. Defense specifications are available online at https://quicksearch.dla.mil.

7.3 Ordering data. The contract or order should specify the following:

a. CID document number and revision.

b. Quantity required.

c. Class(es) and size(s) required; and shade information, as necessary (see 2, 3.2, and 3.2.4).

d. Service-specific markings, if requested (see 3.1, 3.4.1, and 3.6.1).

e. Product conformance provisions, including contract-specific variances from defect scoring, if applicable (see 5.1 and 5.3).

f. Packaging requirements (see 6).

7.4 Visual shade matching. In 2017, Option A of AATCC EP9, Visual Assessment of Color Difference of Textiles, was changed to Option C. NOTE: In case of confusion, the viewing geometry should be “The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35±5-degree angle relative to the horizontal. The observer will view the specimens at a 90-degree angle, relative to the plane of the specimens.”

7.4.1 Use of D75 illuminant. In 2022, the U.S. Military (all services) accepted D65 as the new preferred light source for visual shade matching due to supply chain issues with D75. DD1222s should reflect which light source is used. If the light source is not indicated on the DD1222, D65 will be assumed by the Government Shade Laboratory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

7.5 Standard samples. Standard samples for shade or appearance can be obtained through the contracting agency.

7.6 Key words.

Cotton

Synthetic

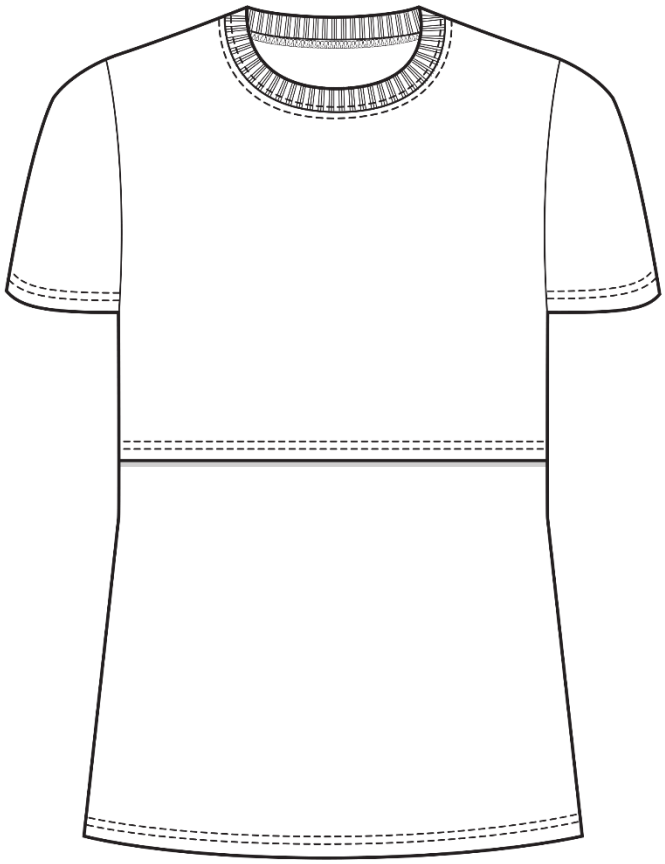


FIGURE 1. Undershirt, nursing (front outside view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

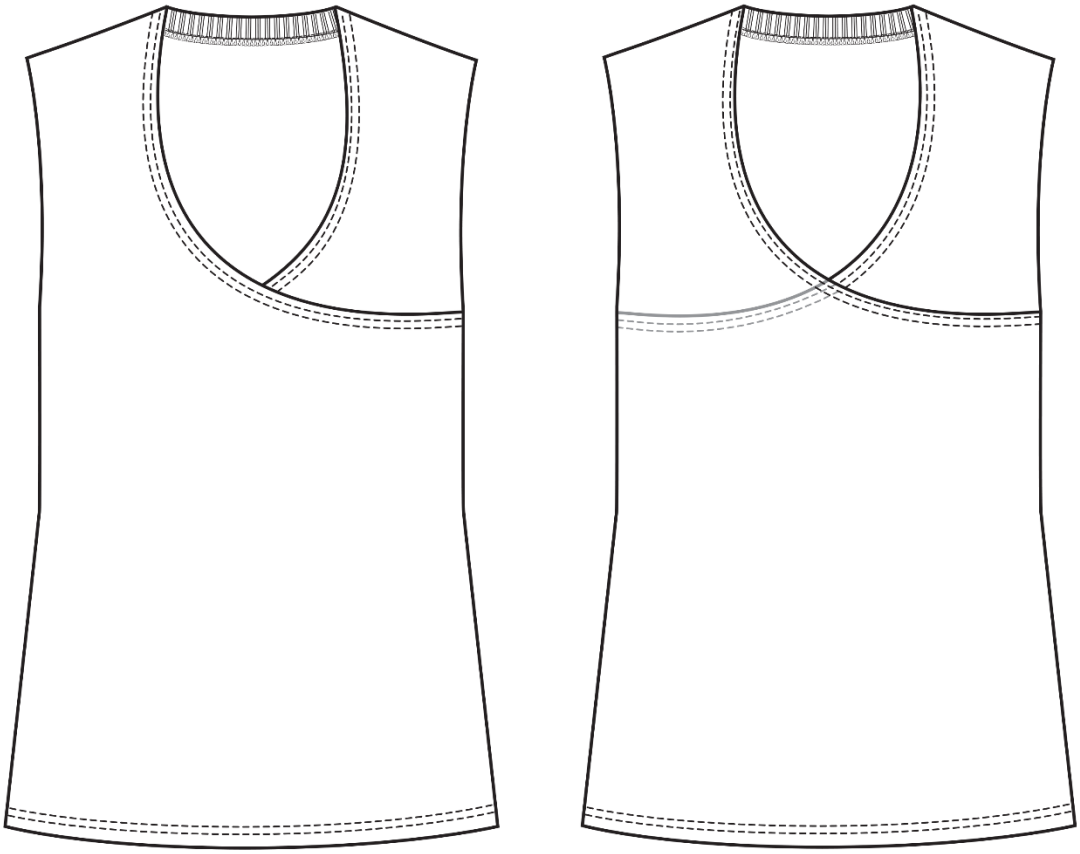


FIGURE 2. Undershirt, nursing (front inside view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

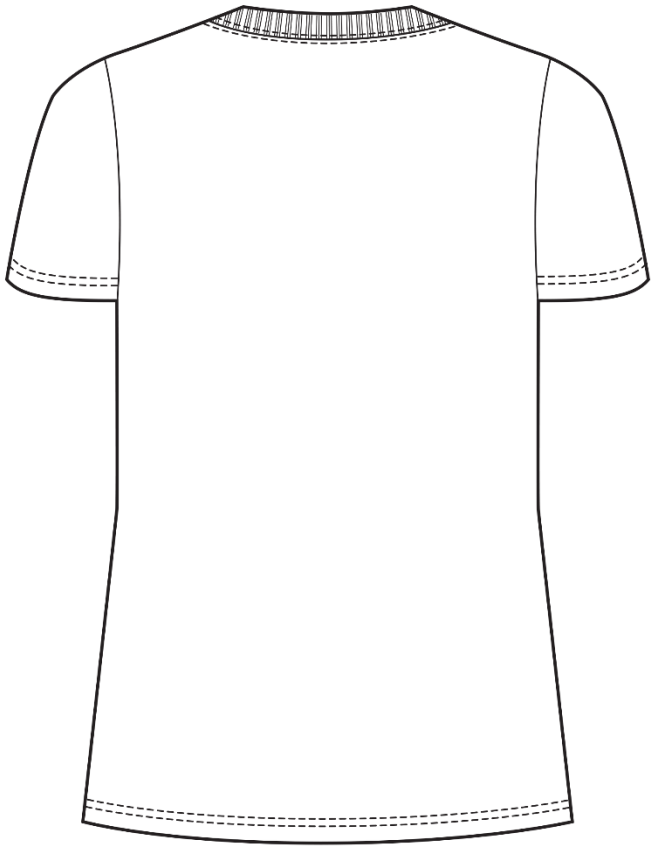


FIGURE 3. Undershirt, nursing (back view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

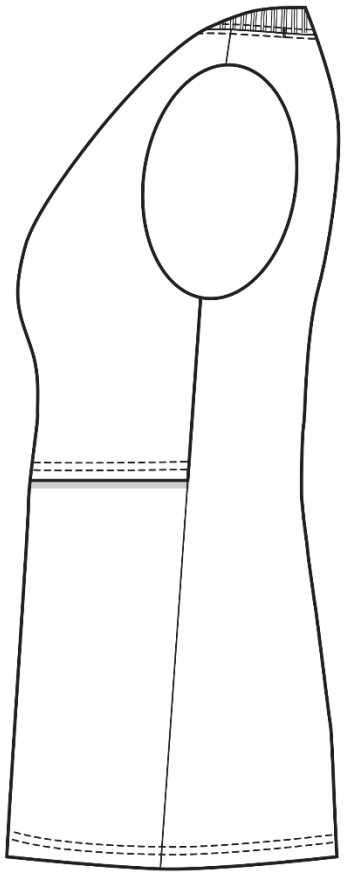


FIGURE 4. Undershirt, nursing (side view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.



NOTE: For reference only. Final graphic will be included in the contract or order.

FIGURE 5. ARMY lettering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

MILITARY INTERESTS:

Custodians:
Army – GL
Navy – MC
Air Force – 11

Review Activities:
Army – MI
Navy – NU
DLA – CT

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS

Preparing Activity:
Navy – MC
(Project 8425-2025-002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.