FEDERAL SPECIFICATION SHEET

CIRCUIT BREAKERS, MOLDED CASE, BRANCH CIRCUIT AND SERVICE, TYPE I, SERIES TRIP, SINGLE POLE (10 THROUGH 70 AMPERES)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the circuit breakers described herein shall consist of this document and the latest issue of Federal Specification W-C-375.

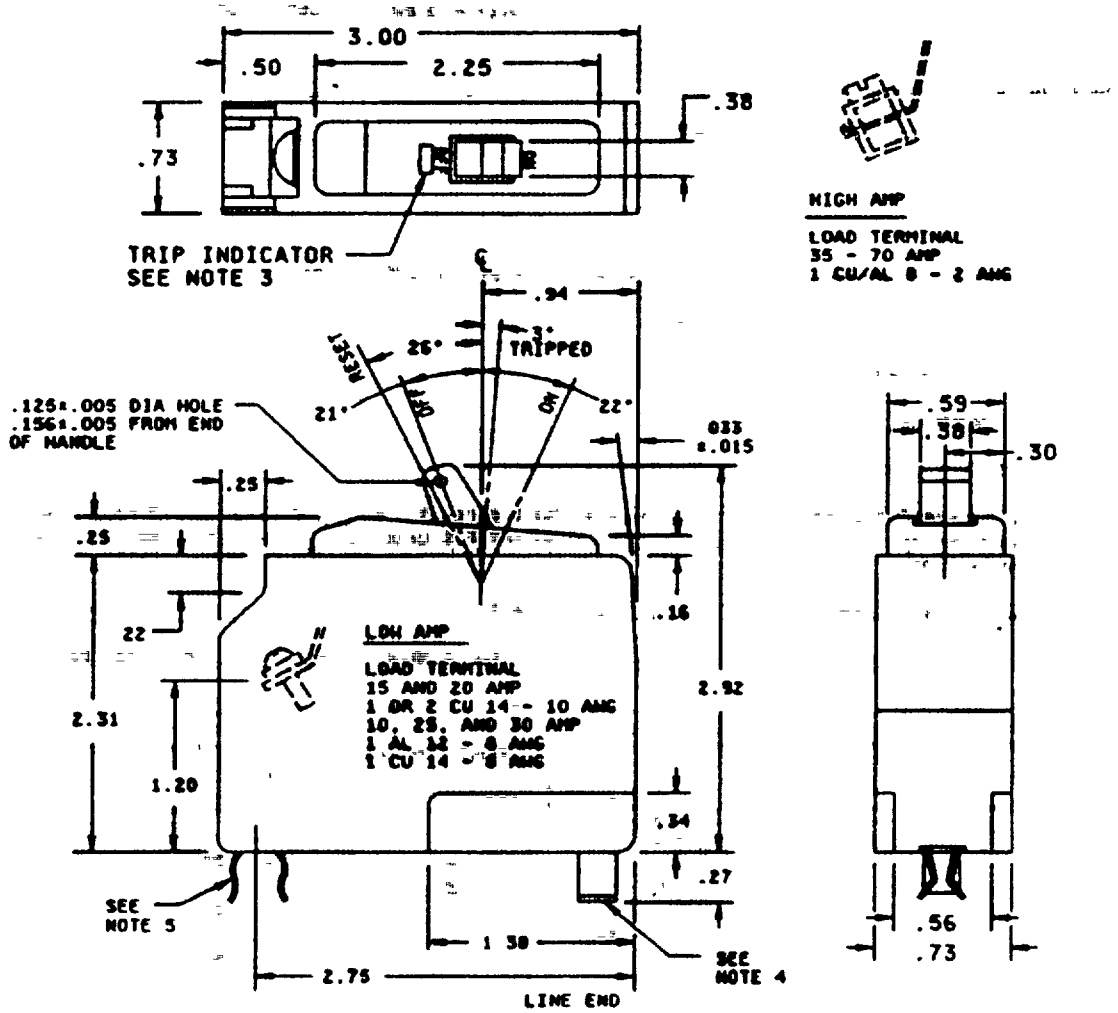


Figure 1. Outline drawing (10 through 70 amperes).

AMSC N/A

FSC 5925

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:26Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.22	5.59	.50	12.70	1.38	35.05
.015	0.38	.25	6.35	.56	14.22	2.25	57.15
.033	0.84	.27	6.86	.59	14.99	2.31	58.67
.125	3.18	.30	7.62	.73	18.54	2.75	69.85
.156	3.96	.34	8.64	.94	23.88	2.92	74.17
.16	4.06	.38	9.65	1.20	30.48	3.00	76.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Red luminescent trip indicator - visible only when breaker is tripped automatically. Window is dark when breaker is in ON or OFF position.
4. Line terminals shall grip a .250 (6.35 mm) wide and .125 (3.18 mm) thick buss bar.
5. Mounting clip shall grip a .250 (6.35 mm) diameter rail.
6. Unless otherwise specified, tolerances are ±.01 (0.25 mm) on decimals and ±1° on angles.

Figure 1. Outline drawing - Continued.

REQUIREMENTS:

Design and construction: See figure 1.

Trip indication: See figure 1.

Electrical:

Interrupting current rating: RMS symmetrical; 10,000 amperes.

Voltage rating: 120/240 V ac.

Trip current: See table I.

Frequency: 60 hertz.

Calibration: At +25°C, ±3°C.

Enclosure for overload, endurance, and short circuit tests: Square D load center Catalog No. QO2L30S used for 10 through 30 ampere breakers, QO2-470F/S used for 35 through 70 ampere breakers, or equivalent.

Supersession and cross reference: See table I.

TABLE I. Part or Identifying Numbers (PINs) and current rating.

Government PIN	Current rating	Commercial superseded PIN CAGE 56365
MC375/01-001 1/	10	QO-110
MC375/01-002	15	QO-115
MC375/01-003	20	QO-120
MC375/01-004	25	QO-125
MC375/01-005	30	QO-130
MC375/01-006	35	QO-135
MC375/01-007	40	QO-140
MC375/01-008	45	QO-145
MC375/01-009	50	QO-150
MC375/01-010	60	QO-160
MC375/01-011	70	QO-170

1/ Not for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:26Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians
Navy - YD
Air Force - 85

Review Activities
Air Force - 99

User Activities
Navy - MC, OS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA/FSS - 7FXE

PREPARING ACTIVITY:

DLA - ES

Project 5925-0240-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:26Z
Check the source to verify that this is the current version before use.