INCH-POUND

W-C-375/7B
13 December 1991
SUPERSEDING
W-C-375/7A
September 12, 1980

FEDERAL SPECIFICATION SHEET

CIRCUIT BREAKERS, MOLDED CASE, BRANCH CIRCUIT AND SERVICE, TYPE I, SERIES TRIP, THREE POLE (15 THROUGH 100 AMPERES)

The complete requirements for acquiring the circuit breakers described herein shall consist of this document and the latest issue of Federal Specification W-C-375.

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

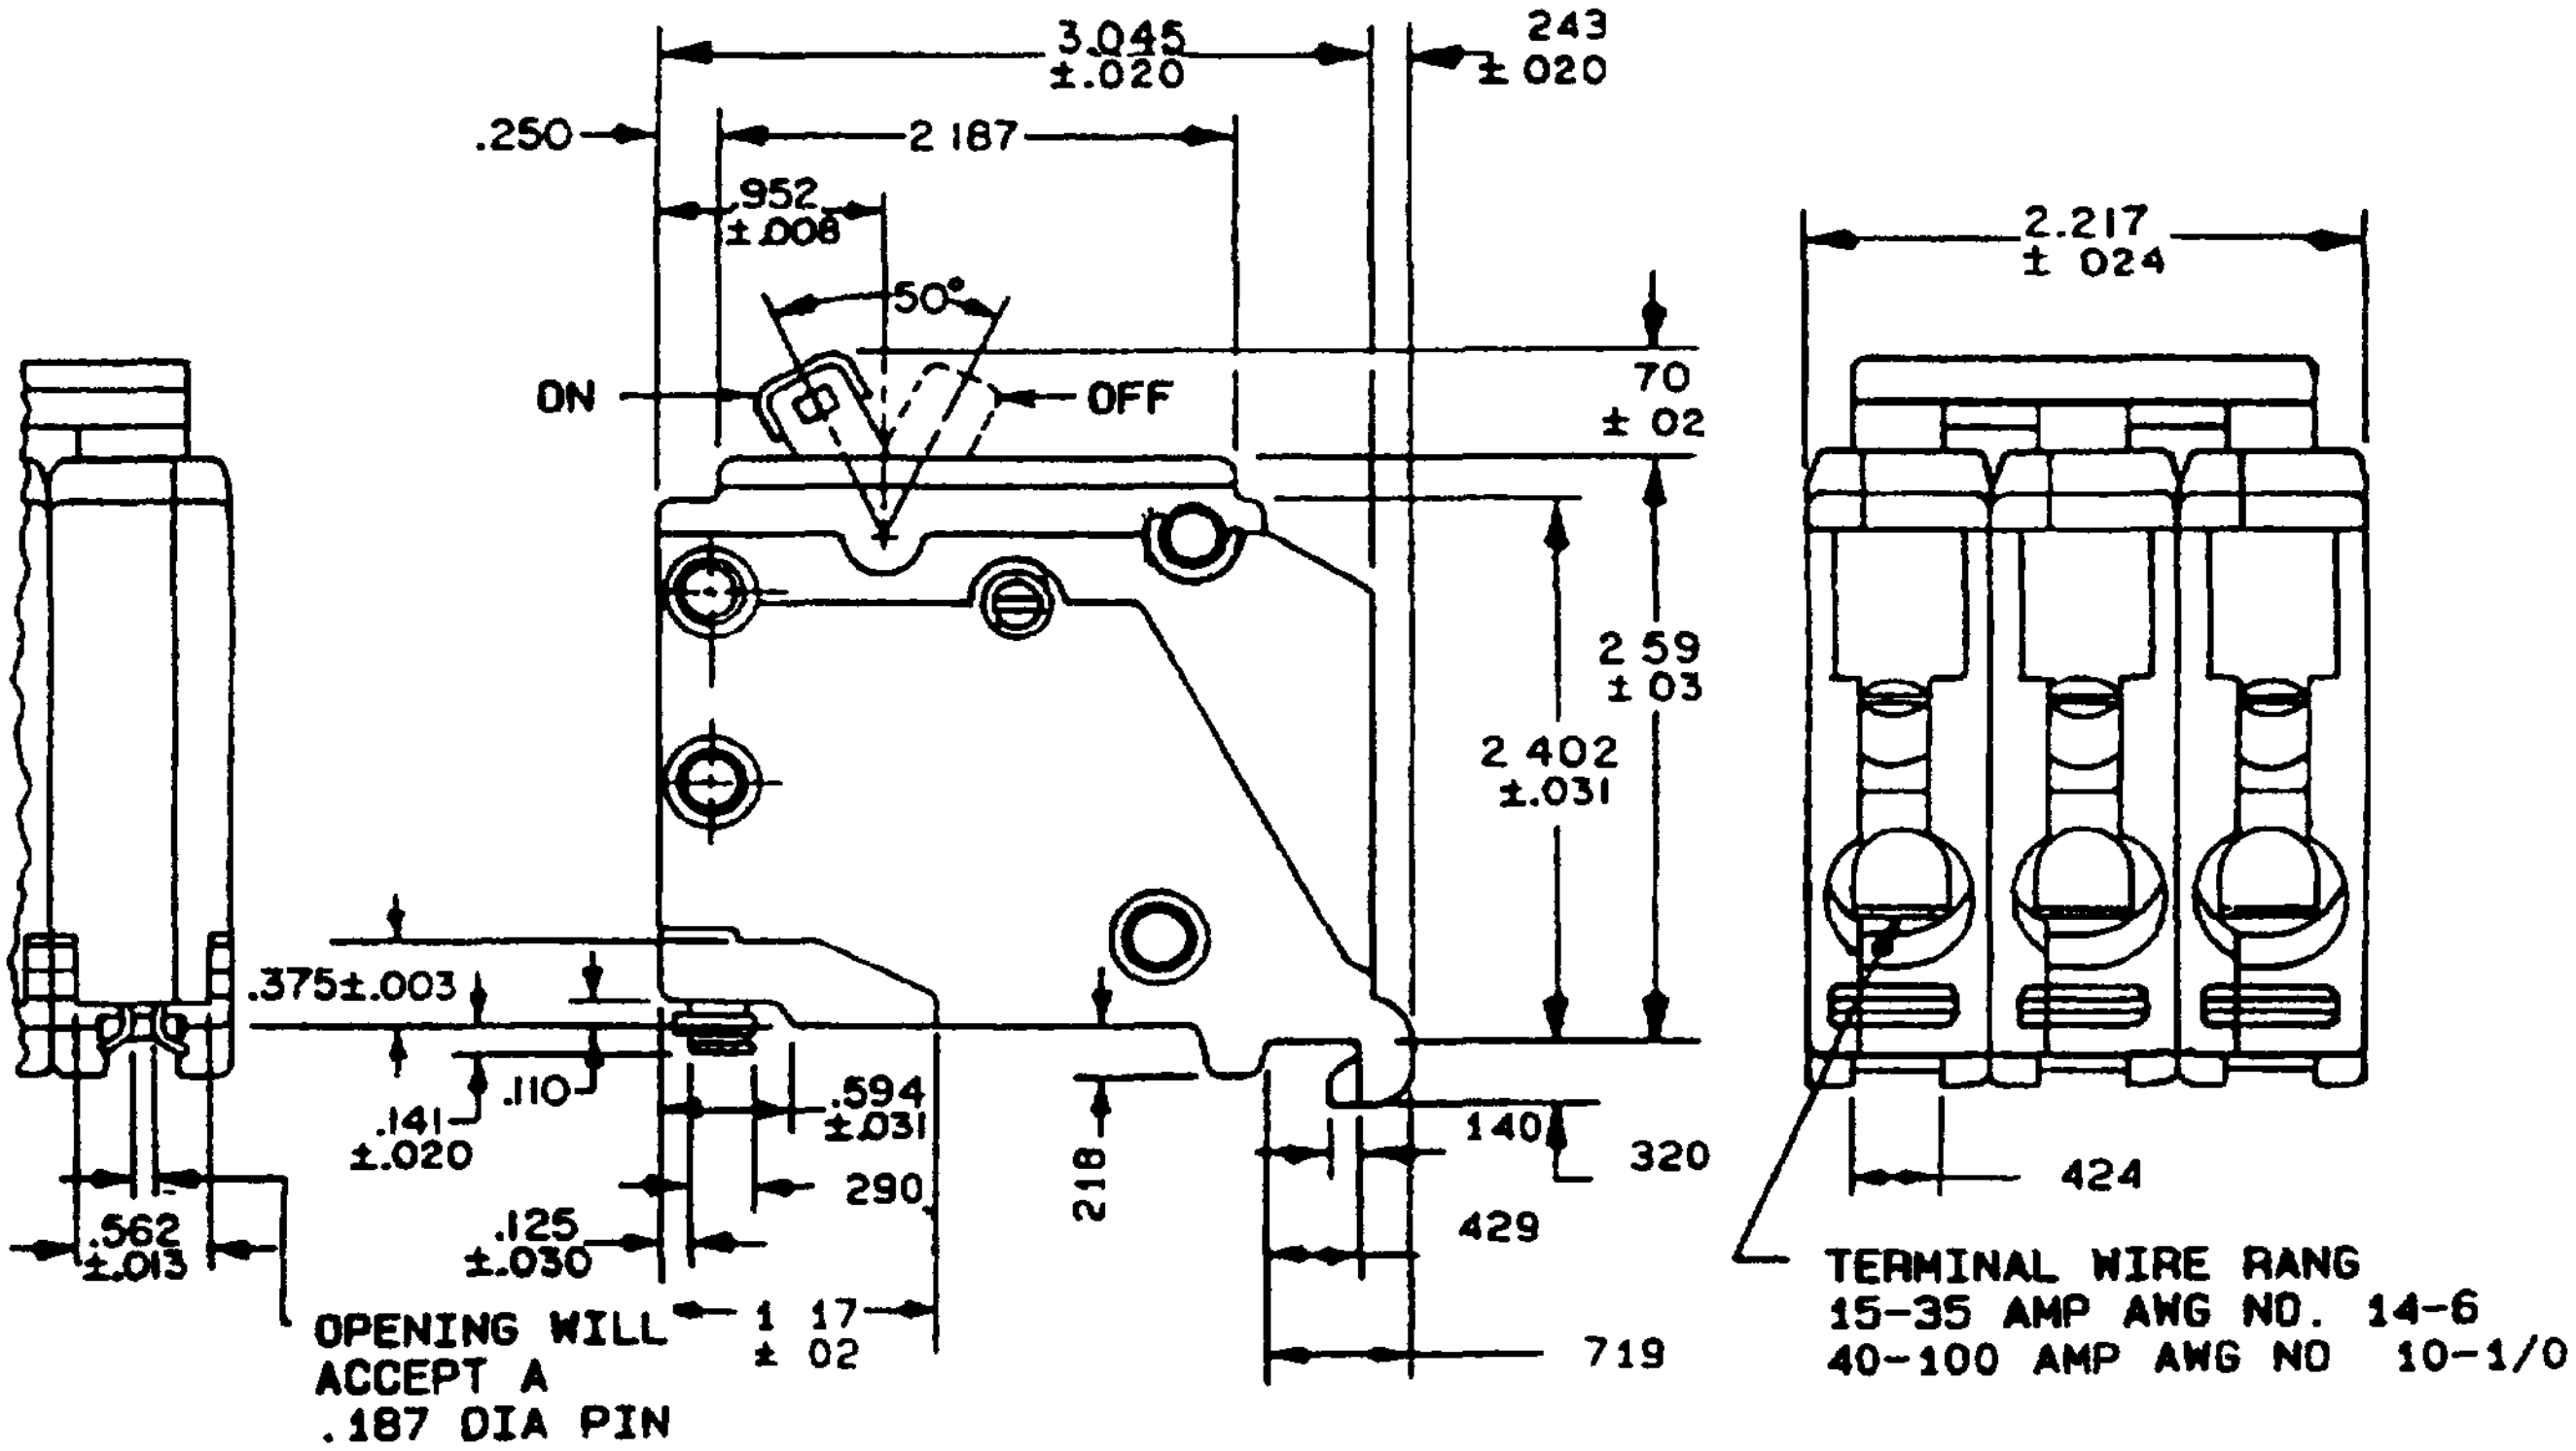

Ⓑ FIGURE 1. Outline drawing

Ⓑ denotes change

AMSC N/A

FSC 5925

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Inches	mm	Inches	mm	Inches	mm
.003	.08	.141	3.58	.70	17.8
.008	.20	.187	4.75	.719	18.26
.013	.33	.218	5.54	.952	24.18
.02	.5	.243	6.17	1.17	29.7
.020	.51	.250	6.35	2.187	55.55
.024	.61	.290	7.37	2.217	56.31
.03	.8	.320	8.13	2.402	61.01
.030	.76	.375	9.52	2.59	65.8
.031	.79	.424	10.77	3.045	77.34
.110	2.79	.429	10.90		
.125	3.18	.562	14.27		
.140	3.55	.594	15 09		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 005 (0 13 mm) on decimals and ±1° on angles
4. Load terminals shall be suitable for copper (CU) and aluminum (AL) wire.

Ⓑ FIGURE 1. Outline drawing - Continued

REQUIREMENTS:

Ⓑ Design and construction. See figure 1.

Ⓑ Trip indication: See figure 1

Common trip: All poles shall make and break simultaneously when operated manually or automatically.

Electrical:

Interrupting current rating: 10,000 amperes.

Ⓑ Voltage rating: 120/240 V ac.

Current rating: See table I.

Frequency: 60 Hertz.

Calibration: At +40°C, ±3°C

Ⓑ Enclosure for overload, endurance, and short circuit tests: Cutler Hammer catalog number CH64S or equivalent.

Supersession and cross reference: See table II.

Ⓑ TABLE I. Part or Identifying Numbers (PINs) and current rating

Government PIN	Current rating	Figure number
WC375/07-001	15	See figure 1
-002	20	See figure 1
-003	25	See figure 1
-004	30	See figure 1
-005	40	See figure 1
-006	50	See figure 1
-007	60	See figure 1
-008	70	See figure 1
-009	90	See figure 1
-010	100	See figure 1
-011	35	See figure 1
-012	45	See figure 1
-013	80	See figure 1

Ⓑ TABLE II. Supersession and cross reference

Government 1/ PIN	Commercial superseded PIN CAGE 27191
WC375/07-001	CH315
-002	320
-003	325
-004	330
-005	340
-006	350
-007	380
-008	370
-009	3090
-010	3100
-011	335
-012	345
-013	380

1/ Replaces CH type with sandalwood handles (5.000 AIC) and red handles (10,000 AIC)

Ⓑ CONCLUDING MATERIAL

Custodians

Navy - YD
Air Force - 85

Review Activities

Air Force - 99
DLA - ES

User Activities

Navy - MC, OS, SH

CIVIL AGENCY COORDINATING ACTIVITIES

GSA/FSS - 7FXE

PREPARING ACTIVITY·

DLA - ES

(Project 5925-0220)