
MILITARY SPECIFICATION SHEET

CONNECTORS, COAXIAL, RADIO FREQUENCY, (SERIES MHV (UNCABLED) - RECEPTACLES, FEMALE, FLANGE MOUNTED, CLASS 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-39012.

INACTIVE FOR NEW DESIGN

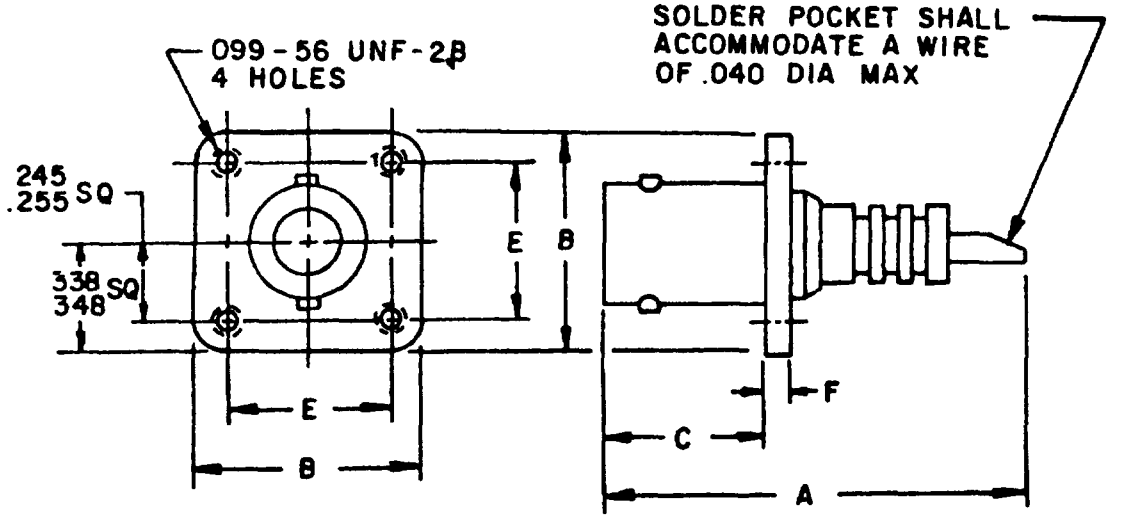


INCHES	MM
099	2 51
.245	6.22
255	6 48
338	8 59
.348	8.84

NOTES
1 Dimensions are in inches
2 For dimensions 'A', 'B', 'C', 'E' and 'F' see table 1
3 Millimeters are in parentheses.
4 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
5 Receptacle recommended for component part use and for use on panels with .078 (1.98 mm) maximum thickness
6 All undimensioned pictorial representations are for reference purposes only
7 Bayonet studs and edges of flange shall be within 3° of the orientation shown

FIGURE 1 General configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:14Z
Check the source to verify that this is the current version before use.

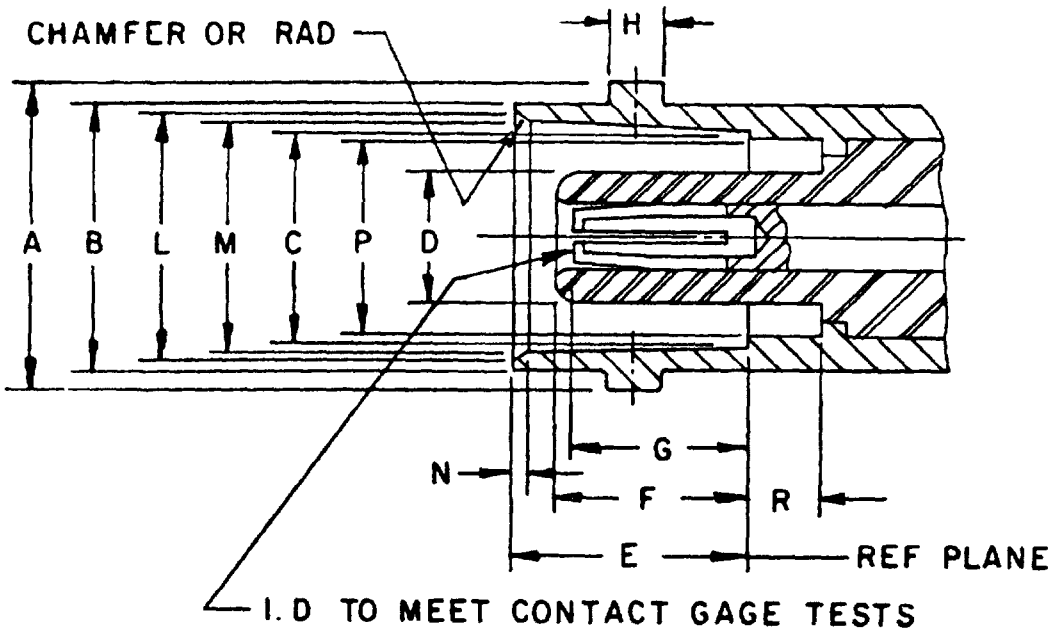

LTR	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	432 (10 97)	.436 (11 07)
B	378 (9 60)	382 (9 70)
C	319(8.10)	.321 (8.15)
D		186 (4 72)
E	327 (8 31)	335 (8 51)
F	289 (7 34)	311 (7 90)
G	253 (6 43)	280 (7.11)
H	075 (1 91)	081 (2 06)
J	270 (6 86)	
K	081 (2 06)	091 (2 31)
L	346 (8.79)	356 (9 04)
M	327 (8 31)	333 (8 46)
N	015 (38)	030 (76)
P	284 (7 21)	290 (7.37)
R	086 (2 18)	




FIGURE 2. Mating dimensions for socket terminations

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:14Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA

Nominal impedance Nonconstant.

Frequency range Not applicable.

Voltage rating
1600 volts rms, maximum working voltage at sea level.
375 volts rms, maximum at 70,000 feet.

Temperature rating -65° to +165°C.

REQUIREMENTS

Dimensions and configuration See figure 1.

Force to engage and disengage
Longitudinal force - 3 pounds, maximum.
Torque - 2-1/2 inch-pounds, maximum.

Mating characteristics
See figure 2 for dimensions.
Outer contact
Test ring ID - .319 maximum, 16 microinch finish.
Insertion force - 5 pounds, maximum when inserted a minimum of .093.
Contacts with slotted members Shall contact a .324 minimum diameter ring within .031 of their tip ends.

Hermetic seal Not applicable.

Leakage (pressurized connectors) Not applicable.

Insulation resistance Method 302, test condition B, MIL-STD-202. 5,000 megohms, minimum.

Contact resistance In milliohms, maximum.

	Initial	After environment
Center contact	2.0	2.5
Outer contact	.2	Not applicable
Braid to body	.1	Not applicable

Corrosion (salt spray) Method 101, test condition B, MIL-STD-202.

Dielectric withstanding voltage Method 301 of MIL-STD-202. 5,000 volts rms, minimum at sea level.

Corona level
Voltage - 1245 volts rms
Altitude - 70,000 feet.

RI high potential withstanding voltage Not applicable.

Connector durability
500 cycles minimum at 12 cycles/min maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.
Initial - 5 pounds, maximum.
Final - 5 pounds maximum, 1 pound, minimum.

Vibration, high frequency Method 204, test condition B, MIL-STD-202. No discontinuities.

Shock (specified pulse) Method 213 of MIL-STD-202, test condition I.
Acceleration - 50 G's at 7 milliseconds. No discontinuities.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:14Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, cross reference and dimensions.

Dash No.	Dim	Inches-millimeters maximum	Inches-millimeters minimum
0001	A	1.500 (38.1)	---
	B	.700 (17.83)	.680 (17.)
	C	640 (16 26)	.610 (15.49)
	E	504 (12 80)	.496 (12.60)
	F	095 (2 41)	.088 (2 24)

Thermal shock Method 107, test condition B, MIL-STD-202, except test high temperature shall be +85°C. High temperature shall be +200°C for connectors using +200°C cable (see table I).

Moisture resistance Method 106 of MIL-STD-202. No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Cable retention force
Noncrimp assemblies - 40 pounds, minimum.

Coupling mechanism retention force Not applicable.

Part number M39012/103-0001

TABLE II. Supersession and cross reference.

Part number	Superseded numbers			
	FSCM 74868	FSCM 91836	FSCM 77820	Type designation
M39012/103-0001	27000	KC-79-02	365-1	UG931

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy -
Air Force - 11, 17, 99
DLA - ES

User activities
Army - AM, AT, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3065-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:14Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAG
NECESSARY
IF MAILED
IN THE
UNITED STAT

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

TO DETACH THIS FORM, CUT ALONG THIS LINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:14Z
Check the source to verify that this is the current version before use.