NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time the document is revised.

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY (SERIES N (CABLED) - JAM NUT MOUNTED, SOCKET CONTACT, CLASS 2) FOR SEMIRIGID CABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-PRF-39012.

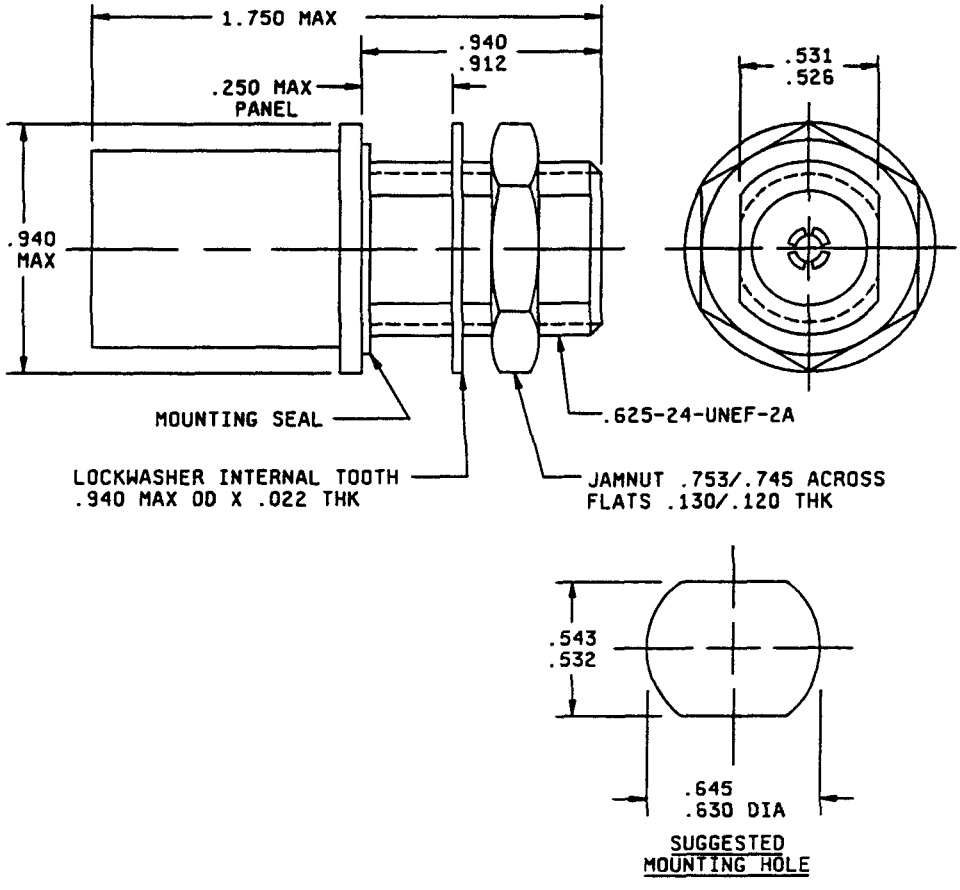


FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.022	0.56	.532	13.51	.745	18.92
.120	3.05	.543	13.79	.755	19.18
.130	3.30	.625	15.88	.912	23.16
.250	6.35	.630	16.00	.940	23.88
.526	13.36	.645	16.38	1.750	44.45
.531	13.49				

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions 1.750 (44.45 mm) and .940 (23.88 mm) are the largest overall dimensions of the connector.
4. Wrench flats, when applicable, are to accommodate standard wrench opening per FED-STD-H28.
5. All undimensioned pictorial representations are for reference purposes only.
6. Dimension 1.750 (44.45 mm) defines the maximim length of the connector when assembled to the appropriate cable.

FIGURE 1. General configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

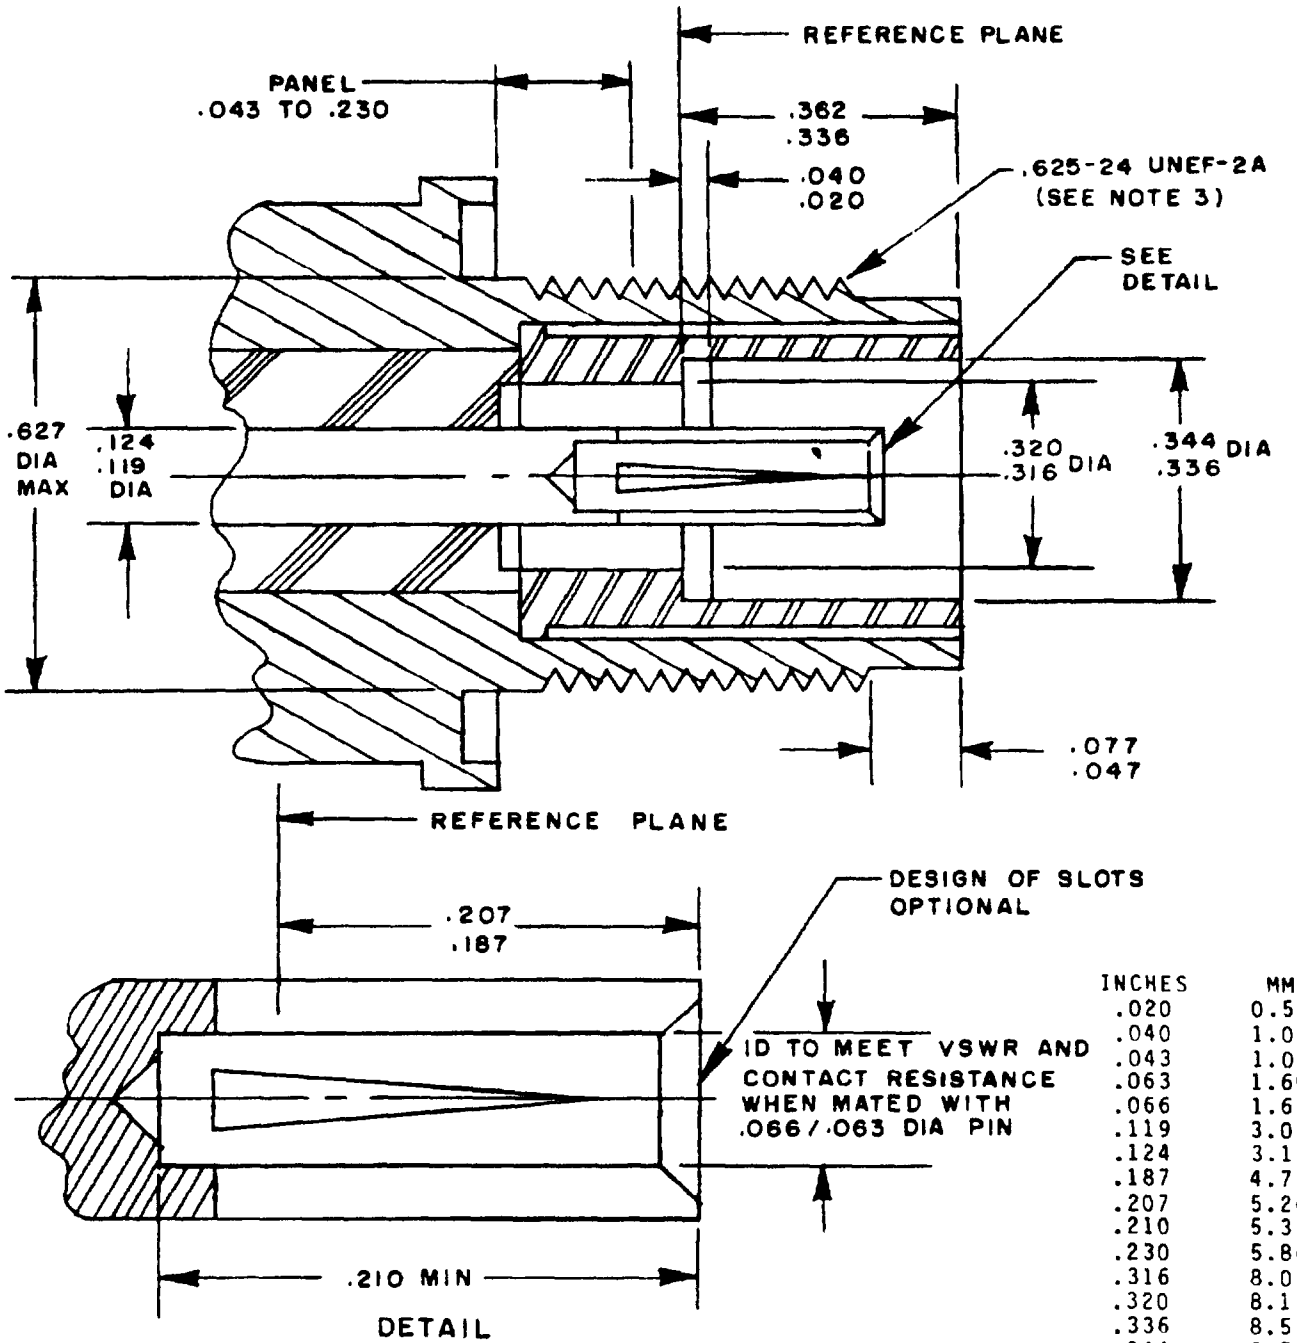

INCHES	MM
.020	0.51
.040	1.02
.043	1.09
.063	1.60
.066	1.68
.119	3.02
.124	3.15
.187	4.75
.207	5.26
.210	5.33
.230	5.84
.316	8.03
.320	8.13
.336	8.53
.344	8.74
.362	9.19
.627	15.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Full threads to within .100 (2.54 mm) of the shoulder, no threads within .035 (0.89 mm) of the shoulder.

FIGURE 2. Mating dimensions for socket terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and applicable cable

Dash No	Applicable cable 2/
CATEGORY A - FIELD SERVICEABLE 1/ (NO SPECIAL TOOLS REQUIRED)	
0001 3001	M17/130-RG402* 0.141 dia. (3.58 mm) M17/130-00001, 00002, 00003
0002 3002	M17/129-RG401* 0.250 dia. (6.35 mm)
CATEGORY E - FIELD REPLACEABLE 1/ (STANDARD ASSEMBLY TOOL KIT)	
0003 3003	M17/130-RG402* 0.141 dia. (3.58 mm) M17/130-00001, 00002, 00003

Dash No.	Applicable cable 2/	Tool No.	Positioning dies	Locator pins	Crimp dies M22520/5
CATEGORY F - FIELD REPLACEABLE MIL-C-22520 COMPRESSION TOOL) 1/					
3201	M17/129-RG401*	M22520/ 36-01	M22520/36-XX	M22520/36-XX	---
3202	M17/130-RG402* M17/130-00001, 00002, 00003				
3203	M17/129-RG401*	M22520/ 5-01	---	---	-XX
3204	M17/130-RG402* M17/130-00001, 00002, 00003				

1/ These connectors have captivated center contacts.
2/ The latest version of each cable shall be applicable.
* Cable to be used when performing tests requiring cable.

NOTE Direct solder type connectors shall not be used on cable larger than .141 nominal diameter.

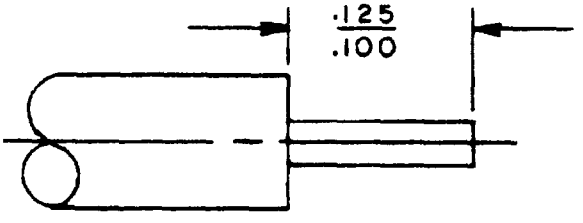


FIGURE 3. Cable stripping dimensions for category E and category F connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA

Nominal impedance. 50 ohms

Frequency range 0 to 18 GHz.

Voltage rating

500 volts rms maximum working voltage at sea level.

125 volts rms maximum at 70,000 feet.

Temperature rating.

-65°C to +105°C for M17/129-RG401.

-65°C to +105°C for M17/130-RG402, M17/130-00001, 00002, 00003.

REQUIREMENTS:

Dimensions and configuration. See figure 1.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: 6 inch-pounds maximum.

Inspection conditions For each test of threaded coupling connector where the test is performed on mated pairs, the pairs shall be torqued to 6 to 10 inch-pounds.

Mating characteristics.

See figure 2 for dimensions.

Center contact (socket).

Oversize test pin: 0.074 diameter mimimum (non-closed entry contact only).

Insertion depth .125 minimum.

Number of insertions: 1.

Insertion force test: Steel test pin diameter .066 minimum.

Test pin finish 16 microinches.

Insertion force: 2 pounds maximum.

Insertion depth .125/.140.

Withdrawal force test Steel test pin diameter .063 maximum.

Withdrawal force: 2 ounces minimum.

Test pin finish: 16 microinches.

Insulation resistance Method 3003 of MIL-STD-1344; 5,000 megohms minimum.

Center contact retention (applicable to captivated center contact connectors only) 6 pounds minimum axial force.

Corrosion (salt spray): Method 1001 of MIL-STD-1344, test condition B.

Voltage standing wave ratio (VSWR) From 2.0 to 18.0 GHz, 1.15 +.012 X freq (GHz)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

Swept frequency VSWR test setup

Item 6 VSWR shall be less than 1.008 +.002 F (F in GHz).

Item 16 VSWR shall be less than 1.008 +.002 F (F in GHz).

Second step of VSWR checkout procedure VSWR shall be less than 1.012 +.004 F (F in GHz).

Group B inspection. VSWR shall be less than 1.024 +.007 F (F in GHz).

Qualification and group C inspection VSWR shall not exceed 1.08.

Connector durability Method 2016 of MIL-STD-1344.

500 cycles at 12 cycles per minute maximum.

The connector shall meet the mating characteristics and force to engage and disengage requirements.

Contact resistance (in milliohms maximum)

	Initial	After environment
Center contact	1.5	2.0
Outer contact	.2	Not applicable
Outer contact (stainless steel)	2.0	Not applicable
Cable outer conductor to body	.05	Not applicable
Cable outer conductor to stainless steel body	2.0	Not applicable

Dielectric withstanding voltage Method 3001 of MIL-STD-1344. 1,500 volts rms minimum at sea level.

Vibration, high frequency. Method 2005 of MIL-STD-1344, test condition IV, except the method of mounting shall be approved by the qualifying activity, and 30 g peak will be applicable.

Shock. Method 2004 of MIL-STD-1344, test condition G.

Thermal shock Method 1003 of MIL-STD-1344, test condition A, except test high temperature shall be +115°C.

Humidity. Method 1002 of MIL-STD 1344. No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level

Altitude 70,000 feet.

Cable (semirigid)	V rms
M17/129-4G401	500
M17/130-RG402, M17/130-00001, 00002, 00003	375

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

RF high potential withstanding voltage

Frequency 5 to 7.5 MHz inclusive.

Leakage current Not applicable.

Cable (semirigid)	V rms
M17/129-RG401	1,200
M17/130-RG402, M17/130-00001, 00002, 00003	1,000

Cable retention.

Cable	Force	Torque
M17/129-RG402	90 pounds minimum	70 inch-ounces minimum
M17/130-RG401, M17/130-00001, 00002, 00003	60 pounds minimum	55 inch-ounces minimum

RF leakage: -90 dB minimum, tested at a frequency between 2 and 3 GHz.

Insertion loss: dB maximum = .10 X $\sqrt{\text{freq. GHz}}$. Test frequency 6.0 GHz.

Part number: M39012/132- (dash number from table I).

TABLE II. Group qualification.

Group	Submission and qualification of any of the following dash numbers 1/ 2/	Qualifies the following dash numbers
I	*001	*001
II	*002	*002
III	*003	*003

1/ Individual connectors other than listed are self qualifying only

2/ Qualification of connectors qualifies connnectors of the same material only.

* Body material and connector requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

Custodians.
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - MI, EA
Navy - SH
Air Force - 11, 17, 80, 99
DLA - ES

User activities.
Army - AT, AV
Navy - AS, MC, OS
Air Force - 19

Agent.
DLA - ES

Preparing activity.
Army - CR

(Project 5935-3438-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.