MIL-R-45906D(GL)
22 May 1984
SUPERSEDING
MIL-R-45906C(GL)
31 March 1980

MILITARY SPECIFICATION

RELEASE, TWO POINTS - SINGLE PULL, PARACHUTIST'S EQUIPMENT PACK

This specification is approved for use by Natick Research and Development Center, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers one type of parachutist's equipment pack release, consisting of quick release fittings and a push-pull type actuator.

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-636 - Boxes, Shipping, Fiberboard

STANDARDS

FEDERAL

FED-STD-595 - Colors

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research and Development Center, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property
MIL-STD-147 - Palletized Unit Loads

DRAWINGS

U.S. ARMY NATICK RESEARCH AND DEVELOPMENT CENTER

11-1-180 - Release, Two Points - Single Pull, Parachutist's Equipment Pack; Assembly Complete
11-1-181 - Release-Fastener Assembly, RH & LH
11-1-182 - Actuator, Push-Pull, Assembly
11 1-194 - Flexible Conduit and Wire Rope Details

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

American National Standard, ANSI B46.1 - Surface Texture

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D256 - Impact Resistance of Plastics and Electrical Insulating Materials
D792 - Specific Gravity and Density of Plastic by Displacement
D3951 - Standard Practice for commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 First article. When specified, the contractor shall furnish a sample for first article inspection (see 4.3, 6.2, and 6.3).

3.2 Materials (see 6.4) and components. Materials and components requirements shall be in accordance with this document and subsidiary documents cited on the applicable drawings.

3.2.1 Molding compound, plastic. The plastic molding compound shall be virgin linear polyethylene. It shall conform to the following requirements:

a. The density shall be 0.953 ± 0,008 grams per cubic centimeter when tested as specified in 4.4.1.1.

b. The impact resistance shall be a minimum of 4.0 foot pounds per inch of notch when tested as specified in 4.4.1.1.

c. The color shall be red conforming to color 31136 of FED-STD-595.

Clean, unburned, reground scrap of the same composition as the virgin material and from the same operation and made from sprues, runners and imperfect parts may be added to the virgin material.

3.3 Construction. The construction of components and assembly of the item covered herein shall conform to the requirements of this document and the designs, details, and dimensions shown or specified on Drawings 11-1-180, 11-1-181, 11-1-182 and 11-1-194.

3.3.1 Knob. In addition to the requirements of Drawing 11-1-182, the knob shall be free from visible surface cracks, checks, blisters, or porous and pebbly areas. The finish shall be nonreflective and uniform in color and texture.

3.4 Performance.

3.4.1 Functional stability. The functional stability of the release depends upon a controlled stroke length. Stroke length is defined as the distance traveled by a release pin on the end of a flexible shaft (relative to a sleeve affixed to a flexible conduit) when an operating force of 9 pounds or less is applied to the release knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

3.4.1.1 Resistance to tensile proof loads. Prior to and after relazation of tensile loads applied as shown on Drawing 11-1-182, the stroke length shall be as specified thereon. The wire rope ends shall be tested first and the armored cable ends thereafter as specified in 4.5.1.

3.4.1.2 Resistance to compressive proof loads. Prior to and after relaxation of the compressive load specified on Drawing 11-1-182, the stroke length shall be as specified thereon when tested as specified in 4.5.1.

3.4.1.3 Release fastener assemblies, right hand, left hand, and links, adapter. The release fastenerr assemblies and adapter links shall show no evidence of fracture, distortion or release after relaxation of a 2500 pound tensile proof load as specified on Drawing 11-1-180 when tested as specified in 4.5.1.

3.4.2 Operational limits.

3.4.2.1 Extraction force. The extraction force required to remove the keeper from the knob shall be as specified on Drawing 11-1-182 when tested as specified in 4.5.1.

3.4.2.2 Positioning release pins. The release pins shall extend to the locking position (full stroke length) when a push (compression load) of 9 pounds or less is applied to the control knob when tested as specified in 4.5.1. The release pins shall retract to the unlocked position when a pull of 9 pounds or less is applied to the control knob when tested as specified in 4.5.1.

3.5 Surface roughness. The surface roughness of components shall be as shown on the applicable drawings when interpreted in accordance with ANSI B46.1.

3.6 Marking for identification. Each release fastener assembly and adapter link shall be marked for identification with the letters US and manufacturer's name or readily identifiable trademark, year of manufacture (last two digits) and part number. Each push-pull actuator assembly shall be marked in accordance with MIL-STD-130 as specified on Drawing 11-1-182.

3.7 Workmanship. All components shall be present and intact, free of cracks, cuts, breaks, rust, burrs or sharp edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

other facilities suitable for the performance of the inspection require-ments specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test items to determine the validity of the certification.

4.2 Classification of inspection.

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4 and tested for the characteristics specified in table II. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document.

4.4.1.1 Testing of material. In addition to materials covered by subsidiary documents, each batch of plastic molding compound shall be tested for density and for impact resistance.

4.4.1.1.1 Density. The sample shall be tested for density in accordance with ASTM D 792. Results shall be reported to the nearest mg. The batch shall be unacceptable if any specimen fails to meet the requirements specified in 3.2.1a.

4.4.1.1.2 Impact resistance. Five determinations shall be made for impact resistance following the procedures of ASTM D256, method A. The test specimens shall be 1/2 inch by 1/2 inch by 2-1/2 inches. Results shall be reported individually to the nearest 0.1 ft. lbs. The batch shall be unacceptable if any specimen fails to meet the requirements specified in 3.2.1b.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

4.4.1.2 Certification. When specified in the contract (see 6.2), the contractor shall furnish a certificate of compliance for the material characteristics listed below:

Material	Characteristic	Requirements
Plastic molding compound	Properties	3.2.1
Inner wrap on flexible conduit	Material identification and coating	Drawing 11-1-194
Outer wrap on conduit	Material identification and mechanical properties	Drawing 11-1-194
Cotton filler yarn on flexible conduit	Breaking strength of single strand, yarn number, ply and color	Drawing 11-1-194

4.4.2 In-process inspection. Inspection shall be made of compoents and subassemblies at appropriate stages of manufacture to determine conformance to the requirements of this document. The Government reserves the right to exclude from consideration for acceptance any materials for which the in-process inspection has indicated nonconformance.

4.4.3 End item visual examination. The end item shall be examined for the defects listed in table I. The lot size shall be expressed in units of releases. The sample unit shall be one release in the disassembled condition, i.e., the release fastener assemblies not connected to the push-pull actuator assembly. The inspection level shall be III and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.0 for major defects and 4.0 for total (major and minor combined) defects.

TABLE I. End item visual defects

Examine	Defect	Classification Major	Minor
Protective finish	Any evidence of rust or corrosion	X	
	Any breaks through coating to base metal		X
Finish of knob	Not color specified		X
	Color or texture not uniform		X
	Molding flash in excess of specified limit		X
	Any surface roughness beyond specified limit		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Finish or knob (cont'd)	Reflective finish	X	
	Any surface checks, blisters, or porous and pebbly areas		X
Construction and workmanship	Any component missing	X	
	Any component broken, cracked, cut, or malformed	X	
	Damaged welds	X	
	Any component not assembled as specified	X	
	Any sharp edges, burrs, or metal slivers	X	
Identification marking	Missing, illegible, incomplete, not applied as specified, incorrect		X
	Not in specified location		X
Directions for use marking	Missing, incomplete, illegible, incorrect, not applied as specified	X	

4.4.4 End item dimensional examination. The end item shall be examined for conformance to the leg, stroke, and length dimensions specified on the drawings. Any dimension not within the specified tolerancee shall be classified as a defect. The lot size shall be expressed in units of releases. The sample unit shall be one release in the disassembled condition, i.e., the release fastener assemblies not connected in the push-pull actuator assembly. The inspection level shall be II and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

4.4.5 End item testing. The parachutist's equipment pack release shall be tested as specified in table II. The lot size shall be expressed in units of releases. The sample unit shall be one completely fabricated release. All tests shall be performed on the same release assembly in the order listed. The inspection level shall be S-4 and the AQL expressed in terms of defect per hundred units, shall be 1.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

TABLE II. End item tests

Characteristics and components	Requirement paragraph	Test method	No. of determinations per sample unit	Record results to
Functional stability				
Resistance to tensile proof loads	3.4.1.1	4.5.2.1		
Stroke length:				
- prior to loading:			1 each end	.001 inch
- after release of load on wire rope ends:			1 each end	.001 inch
- after release of load on armored cable ends:			1 each end	.001 inch
Resistance to compressive loads	3.4.1.2	4.5.2.2		
Stroke length:				
- prior to loading:			1 each end	.001 inch
- after release of load:			1 each end	.001 inch
Release fastener assemblies and adapter links:	3.4.1.3	4.5.2.3	1 left hand 1 right hand	Pass or fail (report point of failure when applicable)
Operational limits:				
Extraction force, keeper pin	3.4.2.1	4.5.3	1	nearest 1/4 lb.
Positioning release pins	3.4.2.2	4.5.4	1	nearest 1/4 lb.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

4.4.6 Packaging inspection. An examination shall be made to determine whether the preservation, packing, and marking comply with section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully packaged. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Marking (unit packs and exterior container)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, defective, or not as specified.
Workmanship	Improper preservation, or closure of interior containers, i.e., improper closure of container flaps; contents not snug fit in container (loose); improper closure of exterior container; loose strapping or tape banding; inadequate stapling. Bulged or distorted container.
Contents (exterior container)	Number per exterior container not as specified.

4.4.7 Palletization examination. When applicable, an examination shall be made to determine that the palletization complies with section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.5 Methods of inspection.

4.5.1 Functional stability tests. The stroke length shall be measured before the application and after the removal of the proof loads shown on Drawing 11-1-182. The knob assembly shall be secured at the elbows in a vertical position with each conduit leg routed over a 3-inch diameter mandrel and the actuator assemblies restrained (see figure 1). The operating force shown on Drawing 11-1-182 shall be applied along the centerline of the knob as a static or dead load applied slowly. The displacement of the cable ends shall be measured by dial indicators graduated in thousanths of an inch.

4.5.1.1 Tensile loading. The tensile proof load tests shall be performed on a complete push-pull actuator assembly. The initial stroke length, prior to the application of proof loads, shall be determined and recorded. The actuator assembly shall then be secured in any suitable tensile loading device and the loads specified on Drawing 11-1-182 shall be applied gradually and maintained for a period of not less than 15 seconds and then removed. The wire rope ends shall be tested first followed by a test of the armored cable ends after each test. The stroke length shall be measured and recorded.

4.5.1.2 Compressive loading. The compression proof load test shall be performed on the release assembly, excluding adapter links. The assembly shall be secured at the elbow to prevent tipping. The knob shall be fully retracted to release position and the latch rotated clear of the release pin. A 1/4-inch wide metal block shall be inserted in the latch slot in the way of the release pin so that the pin is blocked. The specified proof load shall then be applied to the top of the knob for a period of not less than 15 seconds. The load shall then be removed and the stroke length determined. Each leg shall be tested individually.

4.5.1.3 Release fastener assemblies, right hand and left hand, and link, adapter. The tensile proof load test shall be performed on the complete release assembly. The release assembly shall be secured in any suitable tensioning device as follows:

a. The adapter link shall be coupled, utilizing any suitable 1-3/4 inch webbing, to one jaw of the device.

b. The release fastener assembly shall be coupled, utilizing any suitable webbing or metal strapping, to the opposite jaw. A tensile force shall be applied to the specified proofload and maintained for a period of not less than 15 seconds. The load shall then be relaxed and the release fastener assembly and adapter links examined for conformance to 3.4.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

4.5.2 Extraction force test, keeper pin. The keeper pin extraction force test shall be performed on the release assembly. The assembly shall be secured at the elbow to prevent tipping. Any suitable pull scale equipped with registering pin shall be secured to the keeper pin with a 3/4 inch wide hook strap. Force shall be applied in a direction perpendicular to the center line of the knob and the amount required to extract the keeper pin shall be determined.

4.5.3 Push test, release pins. The knob assembly shall be secured at the elbows in a vertical position with each conduit leg routed over a 3-inch diameter mandrel and the actuator assemblies restrained and attached to the quick release fittings (see figure 1). The knob shall be operated as specified in 3.4.2.2 and the stroke length of each of the pins shall be measured and recorded.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each fully assembled release shall be compactly arranged and then unit packed in a snug-fitting fiberboard box conforming to style RSC or OPF, grade W6c of PPP-B-636. Each box shall be closed and waterproofed with tape in accordance with the appendix of the box specification.

5.1.2 Commercial. Each release shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Thirty releases, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to overseas type, style A or I, grade A, type 2 load of PPP-B-601. Each shipping container shall be closed, and reinforced in accordance with the appendix of the applicable container specification.

5.2.2 Level B packing. Thirty releases, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

5.2.2.1 Weather-resistant shipping containers. When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial packing. Releases, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), releases, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The release assembly is intended for use as a component of the Parachutist's Weapons and Individual Equipment Pack (MIL-P-43304), or the Parachutist's Equipment Bag (MIL-B-43173). It is designed to provide for the quick release of the container of bag from the harness of the parachutist.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. When a first article is required (see 3.1, 4.3, and 6.3).
c. When certification is required (see 4.4.1.2).
d. Selection of applicable level of preservation and packing (see 5.1 and 5.2).
e. Type of shipping container desired for level A packing (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

Custodian:

Army - GL

Review activity:

DLA - IS

Preparing activity:

Army - GL

Project No. 5340-A036

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

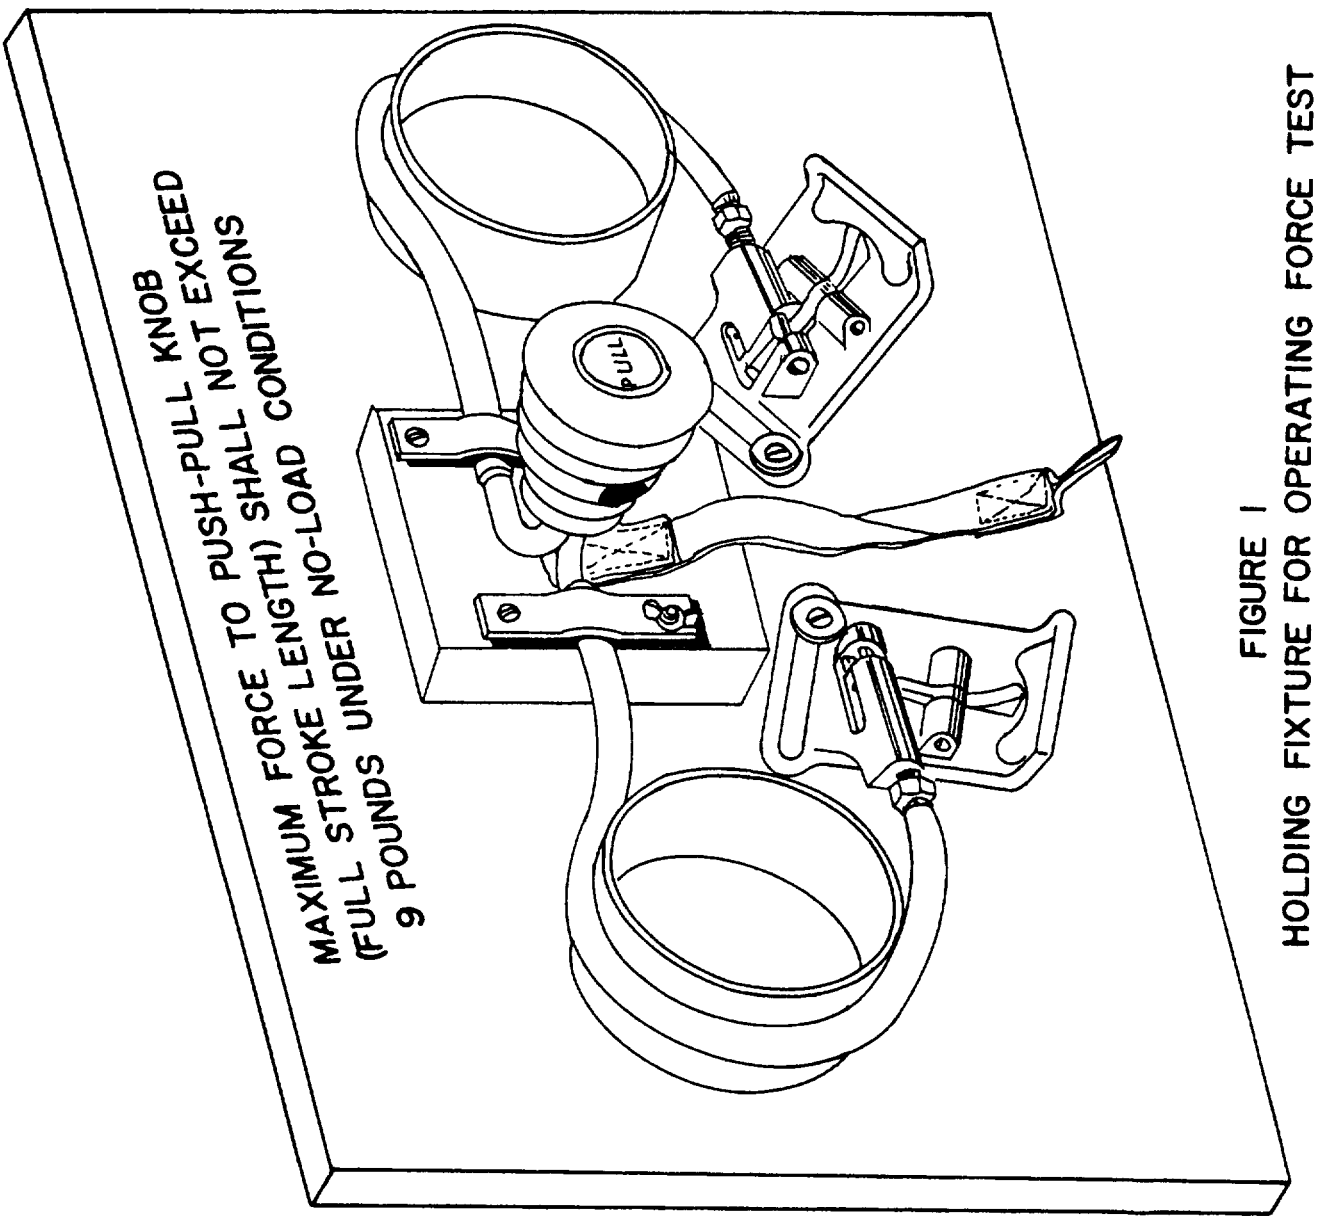


FIGURE I
HOLDING FIXTURE FOR OPERATING FORCE TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Center
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-R-45906D(GL)	Release, Two Points - Single Pull, Parachutist's Equipment Pack

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION

RELEASE, TWO POINTS - SINGLE PULL, PARACHUTIST'S EQUIPMENT PACK

This amendment forms a part of MIL-R-45906D(GL), dated 22 May 1984, and is approved for use within the Natick Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

3.4.1.1, line 1: Change "relazation" to "relaxation".

PAGE 6

4.4.2, line 1: Change "compoents" to "components".

Add the following new paragraph:

"4.4.2.1 Critical defect examination of end items. Prior to performing the end item sampling examination required in 4.4.3, the releases shall be 100 percent examined for the critical defect listed in table I. This 100 percent critical defect examination shall become a part of the contractor's inspection system or quality program. Any release found to contain a critical defect shall be rejected."

4.4.3, line 7: Add the following sentence. "During this examination, any sample unit found to contain the critical defect listed below shall be cause for rejection of the lot."

PAGE 7

4.4.3: Table I, in column headings under "Classification", add "Critical".

At end of Table I, add the following new entry:

"Release fastener assembly	End of pin housing not stacked or peened, or not stacked or peened to retain pin.	Critical"

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.

5.3: Delete and substitute:

"5.3 Palletization. When specified (see 6.2) releases, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type I or Ia, as applicable, of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K or L, or film bonding means O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer."

6.3, line 2: Change "DAR 7-104.55" to "FAR 52.209".

Custodian:

Army - GL

Review activity:

DLA - IS

Preparing activity:

Army - GL

Project No. 5340-A040

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:08Z
Check the source to verify that this is the current version before use.