FED. SUP CLASS
4730

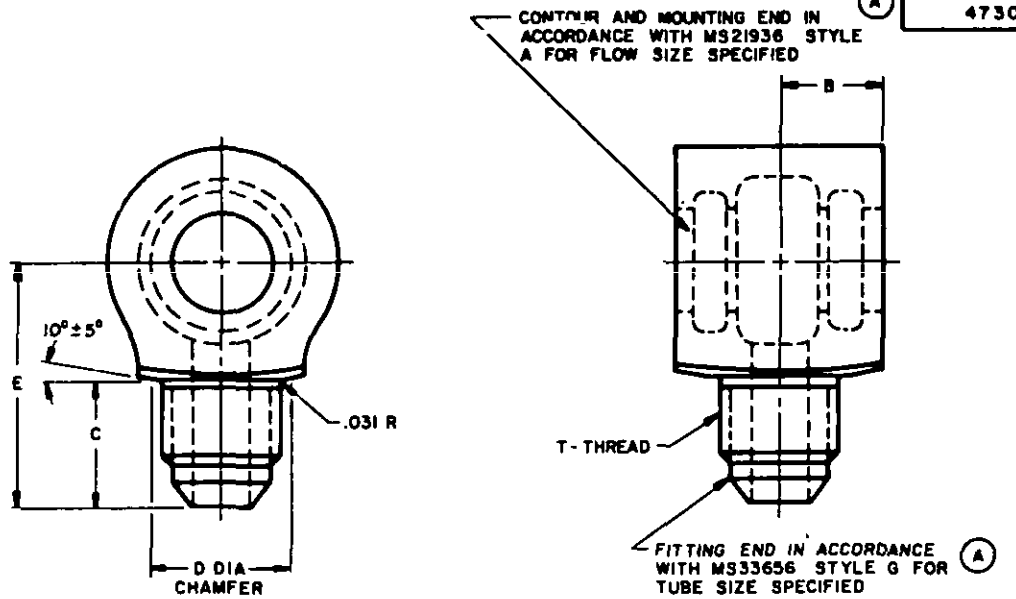

LOW FLOW SIZE MS PART NUMBER	TUBE OD	THREAD T (REF)	B	C	D	E
MS 21953 - 3L	3/16	3/8-24 UNF - 3A	.500	.540	.710	1.109
MS 21953 - 4L	1/4	7-16-20 UNF - 3A	.500	625	.710	1.187
MS 21953 - 5L	5/16	1/2-20 UNF - 3A	500	.625	.710	1.187
MS 21953 - 6L	3/8	9/16-18 UNF - 3A	.500	640	.710	1.203

HIGH FLOW SIZE MS PART NUMBER	TUBE OD	THREAD T (REF)	B	C	D	E
MS 21953 - 4H	1/4	7/16-20 UNF - 3A	.594	625	710	1 438
MS 21953 - 5H	5/16	1/2-20 UNF - 3A	.594	.625	.710	1.438
MS 21953 - 6H	3/8	9/16-18 UNF - 3A	.594	.648	.710	1.460
MS 21953 - 8H	1/2	3/4-16 UNF - 3A	.594	.750	.750	1.662

(A) MATERIAL EXTRUSION 215 ALUMINUM ALLOY SPECIFICATION QQ-A-200/3 TEMPER T4 OR TEMPER T4 ARTIFICIALLY AGED. FORGING 148 ALUMINUM ALLOY SPECIFICATION QQ-A-367 COMPOSITION 5 TEMPER T6.

FINISH SFE PROCUREMENT SPECIFICATION

ALL MACHINED SURFACES FINISHED TO 250 R.M.S. MAX. EXCEPT AS NOTED.
FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES DECIMALS ± .010, ANGLES ± 1/2°.
INSTALL PER MS 21931

(A) FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 15 FEB 1956 REVISED (A) 22 MAY 1975

User activities:

Preparing activities: ARMY - MI
DSA - CS

This military standard is approved for use by all departments and Agencies of the Department of Defense. Selection for all new requirements and design application and for repetitive use shall be made from this document.

P.A. USAF - 82 Other Cust	TITLE BODY - CLUSTER FITTING ONE WAY - FLARE	MILITARY STANDARD MS21953
PROCUREMENT SPECIFICATION MIL - F - 5509	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:42Z
Check the source to verify that this is the current version before use.