FED. SUP CLASS
1670

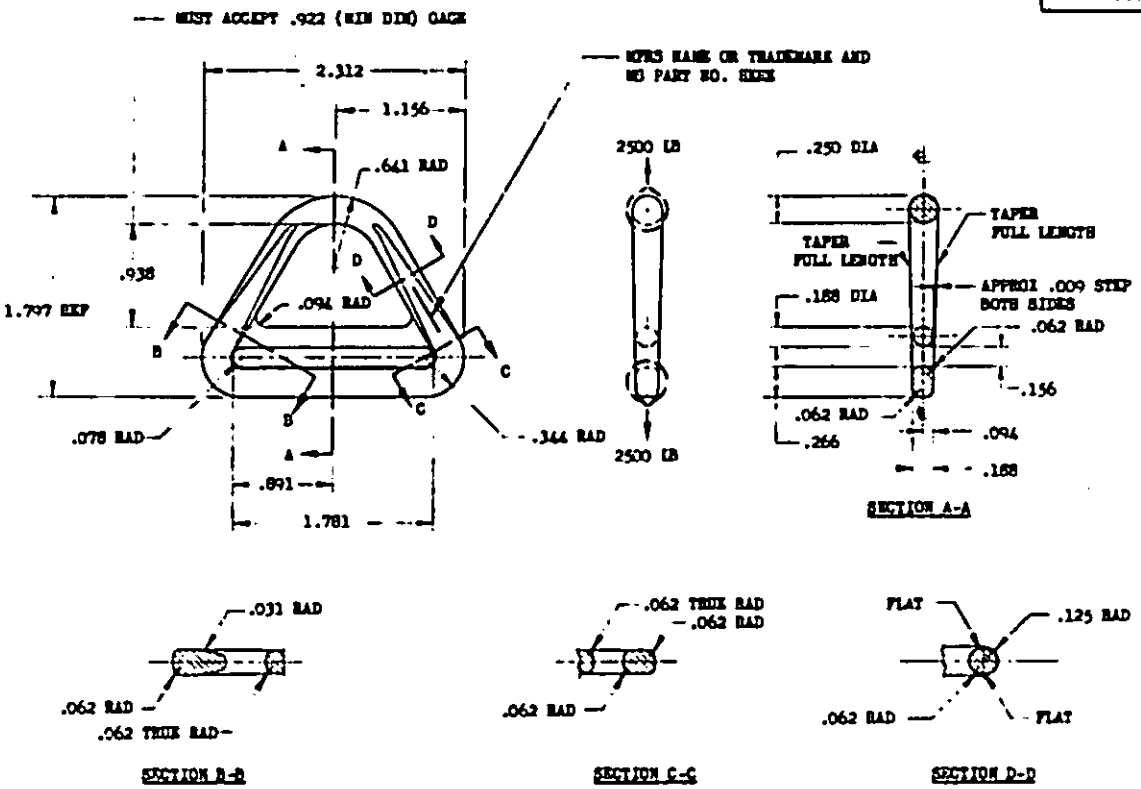

SECTION B-B

SECTION C-C

SECTION D-D

MS PART NO.	FIN
MS22020-1	

LINKS SHALL BE PROOF LOADED AS SPECIFIED HEREON, INDICATED BY ARROWS.

MATERIAL: STEEL, SPEC MIL-S-5626 OR MIL-S-6049.

METHOD OF FORMING: HOT FORGE.

HEAT TREATMENT: SPEC MIL-H-6875
ROCKWELL C38 TO C42. DECARBURIZATION SHALL NOT EXCEED .010

FINISH: CADMIUM PLATE, SPEC QQ-P-416, TYPE I, CLASS A.

REMOVE ALL BURRS AND SHARP EDGES.

LINKS SHALL BE SMOOTH AND FREE FROM PINS AND PITS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS : .010

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREON.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DRAWING HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

(B) REVISED AND REDRAWN

APPROVED 23 MAY 1957 REVISED (B) 27 NOV 81

P.A. NAVY - AS Other Cust	TITLE LINK, PARACHUTE HARNESS TRIANGLE	MILITARY STANDARD MS22020 (AS)
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE. PLATE NO.

PROJECT NO. 1670-N658

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity, all other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.