FED. SUP CLASS
1670

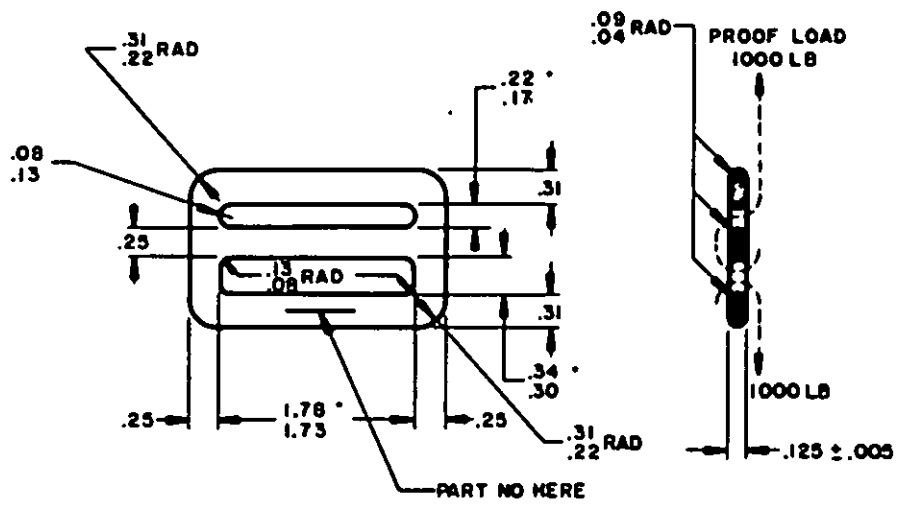

DASH NO
-1
-2

(C) NOTES:

1. MATERIAL: STEEL, MIL-S-18728 OR MIL-S-18729.
2. SURFACE ROUGHNESS: UNLESS OTHERWISE SPECIFIED SURFACE ROUGHNESS SHALL BE 125 $\sqrt{\ }$ MAX. IN ACCORDANCE WITH ANSI B46.1.
3. HEAT TREATMENT: 170,000 TO 190,000 LBS/SQ IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875.
4. FINISH: -1, CADMIUM PLATE, QQ-P-416, CLASS 1, TYPE 1.
   -2, PHOSPHATE COAT, QQD-D-16232, TYPE Z, CLASS 4., FOLLOWED BY MIL-W-3688.
5. ADAPTER SHALL BE SUBJECTED TO THE PROOF LOAD SPECIFIED HEREIN AS INDICATED BY ARROWS, IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.
6. DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED HEREIN, TOLERANCES ± .03.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. END ITEM EXAMINATION:
   A. CRITICAL DIMENSIONS: AS SHOWN *
   B. CRITICAL FUNCTIONAL TEST: NONE
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 12 MAY 61 REVISED (A) 15 MAY 75 (B) 29 AUG 75 (C) 2 JAN 86

User activities:
NAVY - MC

Review activities:
ARMY - AV
AIR FORCE - 11

"DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited."

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Other Cust: USAF - 82 (C), NAVY - AS, ARMY - GL, AF - 99	TITLE: ADAPTER - PARACHUTE HARNESS STRAP	MILITARY STANDARD MS22047
PROCUREMENT SPECIFICATION MIL-H-7198	SUPERSEDES: AN6565	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.