
FED. SUP. CLASS
6940

(A) This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, types TS-143 and TS-144. The items covered herein are for replacement purposes only and shall not be used in the design of new equipment.

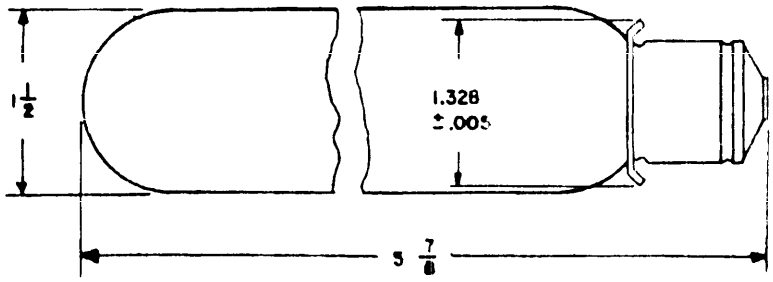

MS part number	Type	FIIN
MS15[illegible]-1	TS-143	[illegible]
MS15[illegible]-2	TS-144	[illegible]

Characteristics	Type TS-143	Type TS-144
Industry number	PH/[illegible]T12/3	PH/1M/T12/1
Watts	750	1000
Volts	115	115
Bulb	T-12	T-12
Finish	Clear	Clear
Base	D.c. medium ring	D.c. medium ring
Filament	C-13D	C-13D
Light center length (inches)[1]	3-1/2	3-1/2
Hours life (approximate)	25	10
Use	(A) Motion picture projector type IC/QPM, 16 mm.	(A) Motion picture projector type IC/QPM, 16 mm.

[1] Distance from center of light source to top of base (+).

(A) Deleted overall length data in characteristics.

APPROVED 1 AUG 1954 REVISED (A) 27 JUN 1956

NOTICE When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS15539 (SHIPS)
Ships	A - N - AF -	LAMP, INCANDESCENT, [illegible] MEDIUM RING	
Procurement Specification		SUPERSEDES	SHEET 1 OF 1

DD FORM 672
OCT 52

GPO 899981

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:48Z
Check the source to verify that this is the current version before use.