
FED. SUP CLASS
4730

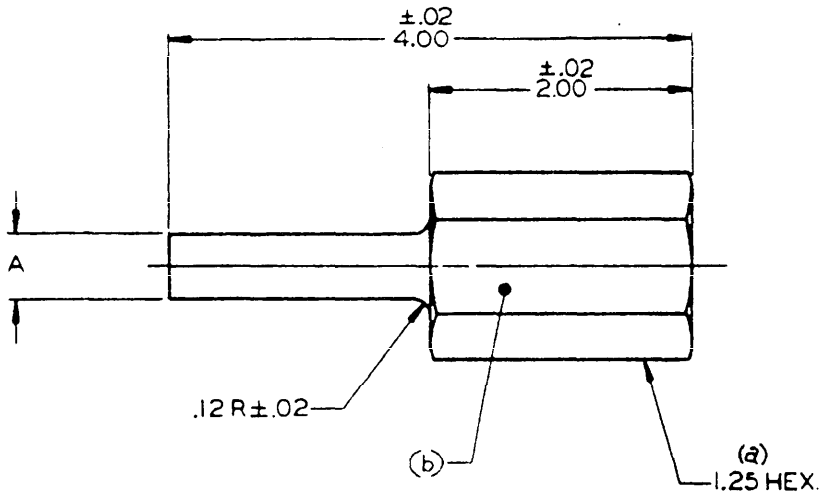

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED:
RADIUS OR BREAK ALL CORNERS .005, + .005/ − .000.
REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ANSI B46.1 − 1962 NOT TO EXCEED 125 AA.
ALL DIAMETERS SHALL BE CONCENTRIC WITHIN .005 TIR.
THIS PART FOR USE WITH MIL-H-83298 HOSE.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(a) USE COMMERCIAL STOCK SIZE TOLERANCE

(b) MS PART NO. AND MANUFACTURERS TRADEMARK HERE.

MATERIAL: STEEL PER AISI S2
HARDNESS SHALL BE ROCKWELL "C" 58 TO 60
FINISH: BLACK OXIDE PER AMS 2485

MS PART NUMBER	A +.000 −.005
MS27639-4C	.315
MS27639-6C	.410
MS27639-8C	.505
MS27639-10C	.640

APPROVED 17 Mar 71

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF-11 Other Cust	TITLE DISASSEMBLY TOOL	MILITARY STANDARD MS27639
Procurement Specification MIL-F-83296	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.