INCH-POUND
MS28781D
w/AMENDMENT 1
4 November 2004
SUPERSEDING
MS28781D
6 April 2001

DETAIL SPECIFICATION SHEET

FITTING END, 90° ELBOW, ATTACHABLE, HYDRAULIC, HIGH PRESSURE HOSE (3,000 PSI), FLARED TUBE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-8789.

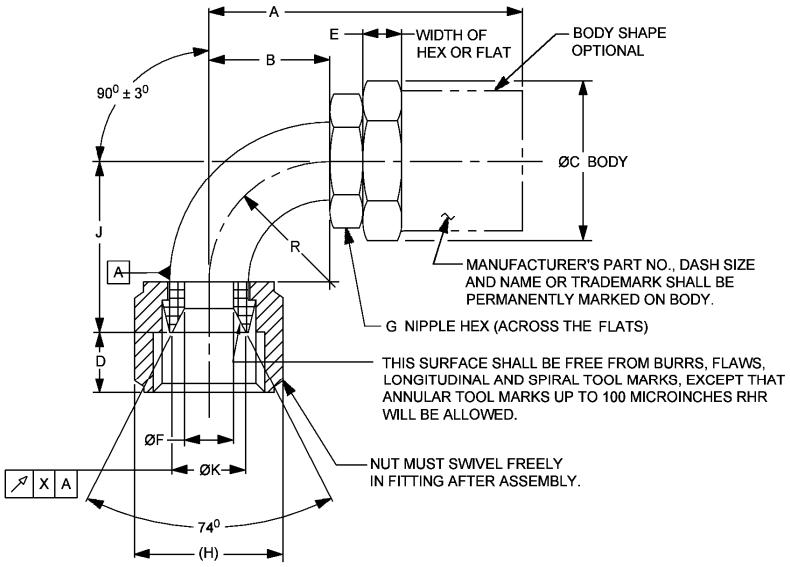


FIGURE 1. Fitting end, 90° elbow, flared tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.

TABLE I. Fitting end sizes, dimensions and weights.

Size dash no.	Hose ID ref	Tubing OD	Nut	A Max	B Max	C Max	D	
4	7/32	1/4	AN818-4	2.750	.410	.875		
5	9/32	5/16	AN818-5		.473	.937		
6	11/32	3/8	AN818-6	2.875	.535	1.160	.375	±.016
8	7/16	1/2	AN818-8	3.000		1.375	.438	
10	9/16	5/8	AN818-10	3.187	.675	1.550	.515	
12	11/16	3/4	AN818-12	4.000	1.285	1.740	.562	±.031
16	7/8	1	AN818-16	4.750	1.562	2.000	.620	

TABLE I. Fitting end sizes, dimensions and weights - Continued.

Size dash no.	E Min	F Min	G	H	J Max	K		R ±.031	X	Wt Max (Lb)
4	.188	.146	.563	.649	.754	.295		.375		.13
5		.177	.625	.721	.879	.355		.437	.005	.15
6	.250	.271	.688	.794	.958	.435	±.010	.500		.17
8		.365	.875	1.010	.972	.570			.010	.26
10	.312	.455	1.000	1.155	1.160	.680		.625		.40
12		.568	1.250	1.443	1.816	.850		1.250		.54
16	.375	.778	1.500	1.732	2.066	1.103	±.015	1.500		.83

REQUIREMENTS:

1. See table I for fitting end sizes, dimensions and weight.

2. Material: Nipples, nuts, and elbows shall be made of steel and the body of aluminum as specified in MIL-DTL-8789. As an alternate, the elbow may be fabricated from steel tubing as specified in MIL-DTL-8789.

3. Finish: Aluminum alloy, anodic treatment, MIL-A-8625, Type II, steel, cadmium plate, QQ-P-416, Type II, Class 3, color-black.

4. Hex or flats shall fit standard wrench openings.

5. A non-standard swivel nut may be used provided the hex and thread dimensions are in accordance with AN818 and provided the nut cannot be removed from assembly.

6. The fitting identification shall be marked in accordance with MIL-DTL-8789.

7. A true circular cross section is not required within angle of bend, however, a ball .031 smaller than “F” diameter must pass through the entire fitting.

8. Break all sharp edges and remove all burrs and slivers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Unless otherwise specified, tolerances: DECIMALS ±.005., ANGLES +/- 1°


3. These fittings are for use with MIL-DTL-8788 hose.

4. This specification sheet takes precedence over documents referenced herein.

5. Referenced documents shall be of the issue listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

6. Part or Identifying Number (PIN):

Example of a PIN: MS28781-4

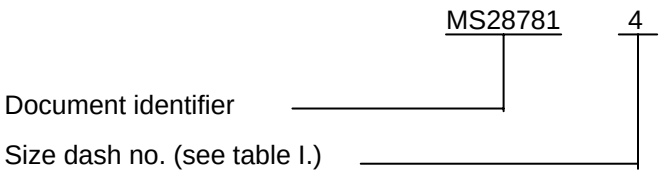

The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONDCLUDING MATERIAL

Custodians:
Army - AT
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2633-000)

Review activities:
Army - AV, MI
Navy - SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.