
FED. SUP CLASS
5935

USER SYMBOLS:
NAVY - AS
ARMY - MI
USAF - 85, 17


REVIEWER SYMBOLS:
NAVY - AS, SH
ARMY - MI, EL
USAF - 11

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current BODIES."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document.

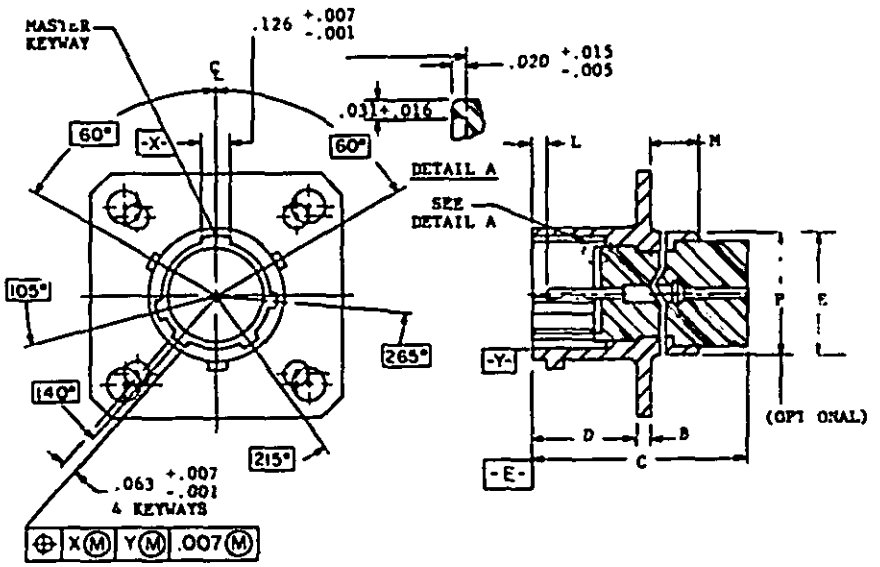

STYLE P (PIN INSERT)

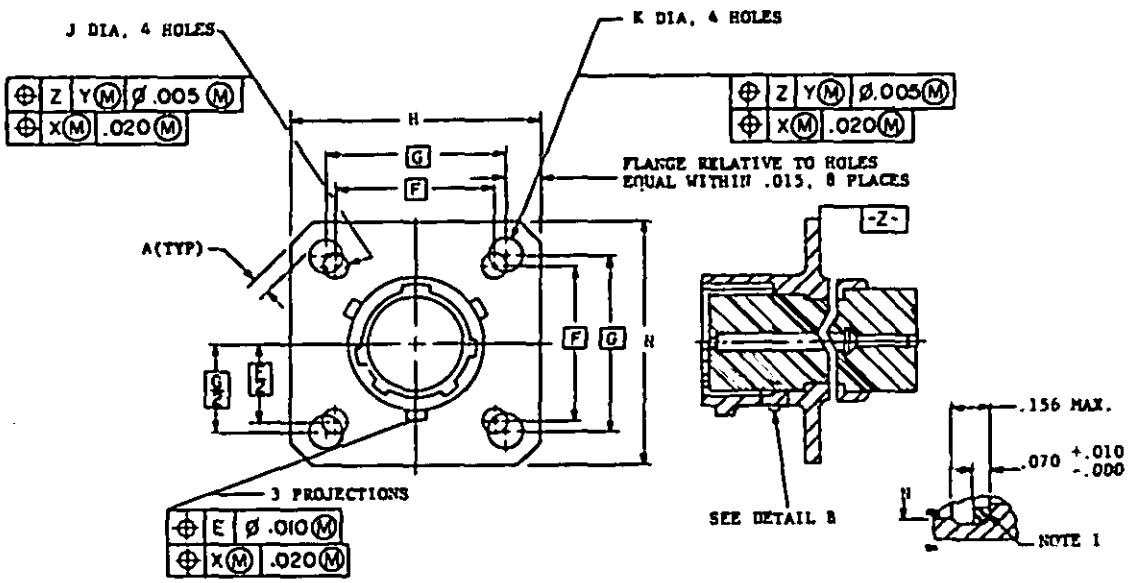

STYLE S (SOCKET INSERT)

Ⓗ INACTIVE FOR NEW DESIGN AFTER 5 SEPT. 1975
ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 5 OCT 1961 REVISED Ⓗ 16 AUG 79

P.A. NAVY - AS Other Cust ARMY - EL USAF - 85	TITLE: CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 1, CRIMP-TYPE, BOX MOUNTING, FLANGE, NO. 4/6 HOLES, BAYONET COUPLING	MILITARY STANDARD MS3127
PROCUREMENT SPECIFICATION MIL-C-26482	SUPERSEDES	SHEET 1 OF 2

DD FORM 1000, 672-1 (Coordinated) PROJECT NO. 5935-3089-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SIZE	A MIN EDGE DIST	B ±.016 THK MTG FLANGE	C MAX OVER-ALL LENGTH	D +.031 -.000 MTG FLANGE LOC.	E DIA +.031 -.024 CO	F (TP) MTG HOLES	G (TP) MTG HOLES	H MAX LENGTH SIDE	J ±.005 DIA MTG HOLES	K ±.005 DIA MTG HOLES	L +.010 -.020 PIN CONTACT LOC.	M MAX	N MAX ID GASKET	P UNEF-2A THREAD (OPT.)
8	-	-	-	-	-	-	-	-	-	-	-	-	-	-
10					.562	.719	.812	1.141					.457	.5625-24
12					.688	.812	.938	1.266					.564	.6875-24
14	.035	.062	1.320	.462	.812	.906	1.031	1.360			.085		.689	.8125-20
16					.938	.969	1.125	1.453	.120	.150		.406	.814	.9375-20
18					1.062	1.062	1.203	1.532					.907	1.0625-18
20			1.367	.556	1.188	1.156	1.297	1.688			.147		1.039	1.1875-18
22	.050	.094			1.312	1.250	1.375	1.766					1.164	1.3125-18
24			1.418	.589	1.438	1.375	1.580	1.891	.147				1.289	1.4375-18

NOTES

1. PACKING MATERIAL SHALL MEET THE REQUIREMENTS OF MIL-STD-147.
2. DELETED.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGLES $\pm 1/2^{\circ}$.
4. TRUE POSITION (TP) TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH ANSI Y14.5-1973.
5. INSERT ARRANGEMENT PER MIL-STD-1669.
6. INTERMATABILITY DIMENSIONS SHALL BE IN ACCORDANCE WITH MIL-C-26482.
7. EXAMPLE OF PART NUMBER:



8. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS.
10. INACTIVE FOR DESIGN AFTER 15 FEBRUARY 1965. USE MS3122 FOR NEW DESIGN.

APPROVED 5 OCT 61' REVISED (H) ENTIRE STANDARD REVISED

USER SYMBOLS: NAVY - AS, ARMY - , USAF - 85, 17

REVIEWER SYMBOLS: NAVY - AS, SH, ARMY - MI, EL, USAF - 11

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. NAVY - AS Other Cust ARMY - EL USAF - 85	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 1, CRIMP-TYPE, BOX MOUNTING, FLANGE, NO. 4/6 HOLES, BAYONET COUPLING	MILITARY STANDARD MS3127
PROCUREMENT SPECIFICATION MIL-C-26482	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO. 23088

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.