
NOTICE When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use, or sell any patented invention that may in any way be related thereto

INACTIVE FOR DESIGN
NO SUPERSEDING STANDARD

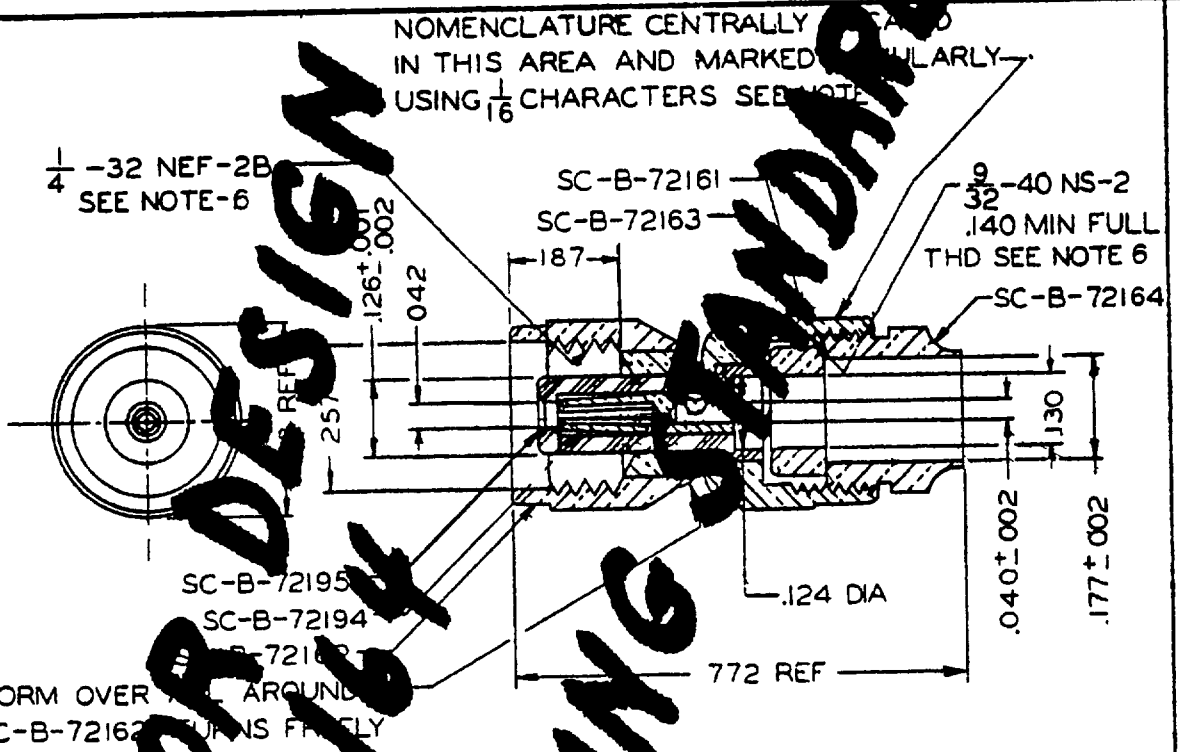


APPLICATION DATA

MINIATURE, NON W[illegible]PROOF RADIO [illegible]CY COAXIAL [illegible]R FOR USE WITHIN EQUIPMENTS BELOW 500 MC AND 100 VOLT PEAK.

| DASH NO. | REQD | DESCRIPTION | MATERIAL | SIGNAL CORPS DRAWING NO. | DASH NO. | REQD | DESCRIPTION | MATERIAL | SIGNAL CORPS DRAWING NO. |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 1 | [illegible] | [illegible]ASS | SC-B-72161 | [illegible] | 1 | NUT, CLAMP | BRASS | SC-B-72164 |
| 2 | 1 | NUT, [illegible]PLING | BRASS | SC-B-72[illegible] | [illegible]6 | 1 | CONTACT | PHOSPHOR BRONZE | SC-B-72194 |
| 3 | 1 | [illegible]AMP, BRAID | BRASS | SC-B-72163 | [illegible] | 1 | INSULATOR | PLASTIC | SC-B-72195 |

NOTES:

1. TOLERA[illegible] ON DIMENSI[illegible] NOT OTHERWIS[illegible]OWN, SHALL BE HELD TO ± .003 ON DECIMALS, ± 1/64 ON FRACTIONS.
2. META[illegible]AMP OR ETCH CHARACTERS SO AS TO [illegible] APPLICABLE REQUIREMENTS OF U. S. ARMY SPECIFICATION 71-[illegible]4.
3. THE [illegible]ULATOR SHALL H[illegible]O CRACKS O[illegible]LE FLAWS.
4. ALL M[illegible]ARTS S[illegible]L BE FREE FROM CHI[illegible]URRS, AND SCRATCHES, IN ACCORDANCE WITH GOOD COMMERCIAL PRACTICE.
5. ALL [illegible]AL PARTS [illegible]ALL HAVE A SILVER [illegible]OF MINIMUM THICKNESS, .0002 INCHES AND OF SUFFICIENT SMOOTH[illegible]SS, AND [illegible]TY TO WITHSTA[illegible]D THE EFFECT OF 48 HOURS OF SALT-SPRAY CORROSION PER FEDERAL SP[illegible]IFICATION QQ-M-15[illegible].
6. [illegible] THR[illegible] BE PER NATIONAL BUREAU OF STANDARDS PUBLICATION H-28.
7. THE [illegible]S35116 AND [illegible]AWINGS, SPECIFICATIONS, PUBLICATIONS, AND OTHER REFERENCED SUBSIDIARIES, IF ANY, CONSTITUTE ALL THE [illegible]ESSARY DA[illegible] R[illegible]TING TO THIS STANDARD.

ALL DIMENSIONS IN INCHES

APPROVED: APRIL 1962 REVISED: 6 November 1964

| CUSTODIAN | MILITARY STANDARD | MS 35116(S16C) |
|---|---|---|
| SIGNAL CORPS | PLUG, CONNECTOR(TYPE S M) UG-693/U | |
| PROCUREMENT SPECIFICATION | | SHEET 1 OF 1 |

MS FORM [illegible] 233

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.