
FED SUP CLASS 4130

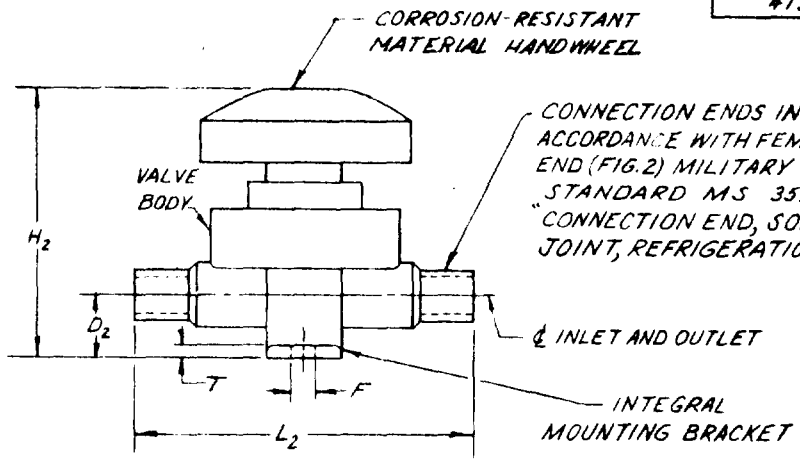

DASH NO. 1/	TUBE OD SIZE	L_2 MIN	L_2 MAX	H_2 FULL OPEN MAX	D_2 MIN	T MIN	F DIA MIN
-1 -1U	1/4	2 1/4	3 1/4	3 5/8	9/16	1/8	3/16
-2 -2U	3/8	2 1/4	3 1/2	3 5/8	9/16	1/8	3/16
-3 -3U	1/2	3 1/8	3 7/8	3 7/8	5/8	1/8	3/16
-4 -4U	5/8	3 1/2	4 3/8	4 1/8	3/4	1/8	3/16
-5 -5U	7/8	3 13/16	4 7/8	6	3/4	1/4	3/16
-6 -6U	1 1/8	4 15/16	6	7	15/16	1/4	25/64

1/ .MS DASH NUMBERS WITHOUT LETTER DESIGNATES VALVE BACKSEATING ABOVE DIAPHRAGM ONLY

MS DASH NUMBERS WITH LETTER "U" DESIGNATES VALVE BACKSEATING ABOVE AND BELOW DIAPHRAGM

NOTES

1. VALVE BODY:
   A. MATERIAL: FORGED BRASS, ALLOY 377 OF QQ-B-626.
   B. FINISH: MANUFACTURERS STANDARD COMMERCIAL.
2. OPERATING REQUIREMENTS:
   A. MAXIMUM OPERATING PRESSURE: 300 P.S.I.G.
   B. MAXIMUM OPERATING TEMPERATURE: 200 F.
   WHEN VALVE IS SUBJECTED TO MAXIMUM OPERATING REQUIREMENTS THERE SHALL BE NO LEAKAGE BY SEAT OR TO THE OUTSIDE AND THE VALVE SHALL OPEN READILY WITH MAXIMUM OPERATING PRESSURE ABOVE SEATING DISK.
3. SEATING DISK AND DIAPHRAGM.
   MATERIAL: RESILIENT, CORROSION-RESISTANT, LONG WEARING METAL OR COMPOSITION MATERIAL IMPERVIOUS TO ALL REFRIGERANTS OF THE CHLORO-METHANE FAMILY.
4. ALL SIZES SHOWN ARE OUTSIDE TUBE DIAMETER SIZES.
5. ALL DIMENSIONS GIVEN IN INCHES.
6. VALVE SHALL HAVE THE DIRECTION OF FLOW INDICATED ON BODY, UNLESS VALVE IS NON-DIRECTIONAL.
7. MOUNTING BOLT SPACING IS SUBJECT TO INDUSTRY PRACTICE.
8. VALVE SHALL HAVE AN UNRESTRICTED FLOW AREA AT LEAST EQUIVALENT TO THE AREA OF A CIRCLE HAVING A DIAMETER EQUAL TO THE INSIDE DIAMETER OF THE TUBING.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
11. (C) PART NUMBER. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 35880-1.

APPROVED 11 DECEMBER 57 REVISED (A) 29 JULY 66 (B) 19 NOV 1971 (C) 24 FEB 1978

Review activity: DSSC-GS
User activity: Navy - MC

This Military Standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

CUSTODIANS		MILITARY STANDARD	MS 35880
ARMY-GL NAVY-SH USAF-99		VALVES, PACKLESS STOP, SOLDER-JOINT CONNECTION ENDS	
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 OCT 67 672-1

PROJ. NO. 4130-0262

* U.S. GOVERNMENT PRINTING OFFICE : 1978 : 703-122/1519

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.