

FED. SUP CLASS
6630

USER ACTIVITIES A. -CE

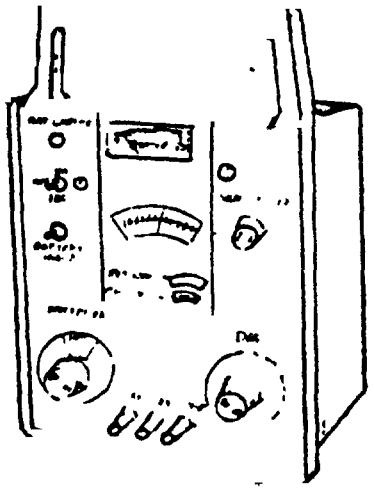

MS36581-1

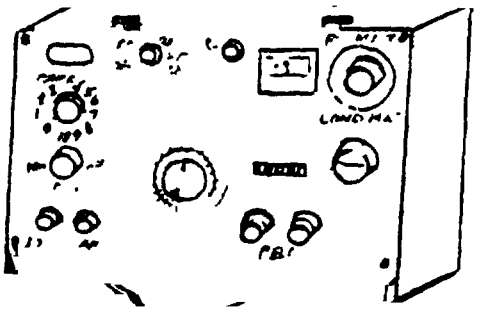

MS36581-2

REVIEWER ACTIVITI... ARMY - ER, ME
AIR FORCE -
NAVY - YD

	MS36581-1	MS36581-2
Range*	0.002-250 x 10^6 ohm-cm 0.004-500 x 10^6 s/cm#	0.01-110 x 10^6 ohm-cm 0.001-11 x 10^6 s/cm
Accuracy percent of Range	± 1	± 0.25
Null Detector	Meter	Meter
Readout	Anolog	Digital
Internal Balance for Capacity	No	Yes
Bridge Source Freq. Hz	85 and 1000	100 and 1000
Function With Grounded Cell	Yes	Yes
Temperature Compensation	No	Available as Plug-in
Bridge Voltage	1 VRMS	0.2 VRMS
Power Source	4C-size nonrechargeable batteries	115-230V 50-60Hz with rechargeable batteries
Net Weight	2.1 kg	4.5 kg
Case Dimensions	292 x 197 x 178 mm	279 x 197 x 226 mm

*With appropriate cell constant.
#MS/cm-M Siemens/cm (micromhos/cm)

MATERIAL: Case shall be of ABS (Acrylonitrile-butadiene-styrene) plastic in accordance with Federal Specification L-P-1183B

This mil... andard is approved for use by all Departm... and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A EA Other Cust MS 99	INTERNATIONAL INTEREST	TITLE BRIDGE, CONDUCTIVITY METER	MILITARY STANDARD MS 36581
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6630-0194
STANDARD DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:43Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6630

DESIGN Bridge shall be a compact, portable, manually balanced conductivity bridge with self-contained batteries operating from two power sources (dry cells or direct from AC line) The measuring circuit shall be an AC Wheatstone Bridge with selectable frequencies of 85 and 1000 Hz The electronics shall be solid state The sensitivity shall be within 1/3% and the accuracy 1% of the reading over all, except the extreme ends of the scale

PURPOSE For use in the measurement of solution conductivity

NOTES

1 Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein

2 Referenced document shall be of the issue in effect on date of invitations for bid

REVIEWER ACTIVITIES.

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED REVISED

A (Other Cost Procurement Specifications	INTERNATIONAL INTEREST SUPERSEDES:	TITLE BRIDGE, CONDUCTIVITY METER	MILITARY STANDARD MS36581 SHEET 2 OF 2

DD FORM 1 MAY 1 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:43Z
Check the source to verify that this is the current version before use.