
FED SUP CLASS
5930

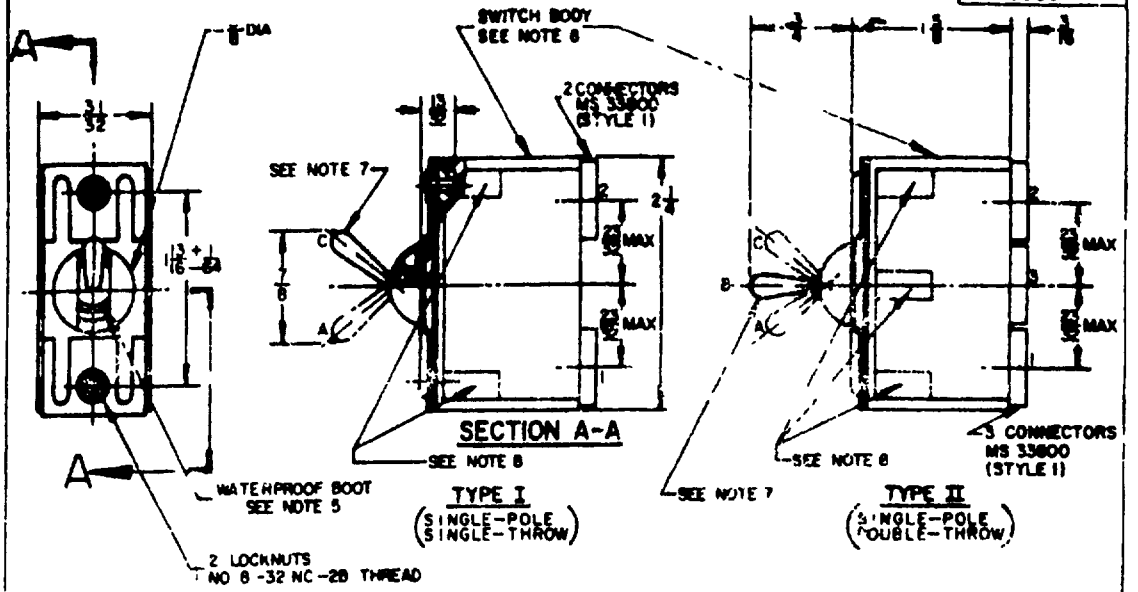

MS PART NO	FORMER PART NUMBER	TYPE	CLASS A-MOMENTARY B-MAINTAINED	LEVER POSITION			LEVER POSITION CIRCUITRY		
				A	B	C	POSITION A	POSITION B	POSITION C
MS 39061-1	ORD 8376806	I	B	ON	NONE	OFF	1 AND 2	NONE	NONE
MS 39061-2	ORD 8376807	I	AB	MOM ON	NONE	OFF	1 AND 2	NONE	NONE
MS 39061-3	ORD 8376808	I	AB	ON	NONE	MOM OFF	1 AND 2	NONE	NONE
MS 39061-4	ORD 8376809	II	B	ON	OFF	ON	2 AND 3	NONE	1 AND 3
MS 39061-5	ORD 8376810	II	AB	ON	NONE	MOM ON	2 AND 3	NONE	1 AND 3
MS 39061-6	ORD 8376811	II	AB	ON	OFF	MOM ON	2 AND 3	NONE	1 AND 3
MS 39061-7	ORD 8376812	II	B	ON	NONE	ON	2 AND 3	NONE	1 AND 3
MS 39061-8	ORD 8376813	II	A	MOM ON	OFF	MOM ON	2 AND 3	NONE	1 AND 3

NOTES: 1. GRADE I (WATERPROOF) OF PROCUREMENT SPECIFICATION. SWITCH TYPE AND CLASS SHALL BE AS SPECIFIED IN TABULATION.

2. 25 AMPS RESISTIVE LOAD, 15 AMPS INDUCTIVE LOAD, 6 AMPS LAMP LOAD.

3. AVERAGE OPERATING FORCE, WHEN APPLIED 1/8 ± 1/32 INCH FROM END OF SWITCH LEVER, SHALL BE 3/4 TO 3 POUNDS FOR CLASS B (MAINTAINED) POSITIONS, 2 TO 3-1/2 POUNDS FOR CLASS A (MOMENTARY) POSITIONS, EXCEPT "MOMENTARY POSITION RELEASE" WHICH SHALL BE SELF CANCELLING.

4. SWITCH SHALL WITHSTAND A FORCE OF 25 POUNDS APPLIED 1/8 ± 1/32 INCH FROM END OF SWITCH LEVER.

5. WATERPROOF BOOT FOR SWITCH LEVER SHALL BE RUBBER CLASS SC 515 A_1 B_{E3} F_2 Z IN ACCORDANCE WITH SPECIFICATION MIL-R-3065, WHERE "Z" REQUIREMENT MEANS MATERIAL SHALL WITHSTAND OZONE RESISTANCE TEST WITH SWITCH LEVER IN POSITION "A" OR "C" SHOWN ABOVE WHEN TESTED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

6. SWITCH BODY SHALL BE RUBBER CLASS RN 610 AF_1 OR SC 615 AC_1 E_3 F_7 IN ACCORDANCE WITH SPECIFICATION MIL-R-3065.

7. THE LEVER DIMENSIONS SHALL BE SUCH AS TO ALLOW FOR INCORPORATION OF THE LUMINOUS TIP SHOWN ON AN 3221.

8. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURERS IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130 AND LEVER POSITION IDENTIFICATION IN ACCORDANCE WITH ABOVE TABULATION.

9. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES, TOLERANCE ± 1/32 ON FRACTIONS.

10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

11. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

12. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.

(B) ENTIRE STANDARD REVISED

APPROVED 30 DECEMBER 1958 REVISED (A) 17 AUGUST 1961 (B) 1 OCTOBER 1963

P.A. MO

Other Cust

SWITCH, TOGGLE — SPST, SPDT, 24 VOLT DC, 25 AMP (WATERPROOF)

MILITARY STANDARD

MS 39061 (MO)

SHEET 1 OF 1

PROCUREMENT SPECIFICATION
MIL-S-13735

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.