
FED. SUP CLASS 5305

MS9293

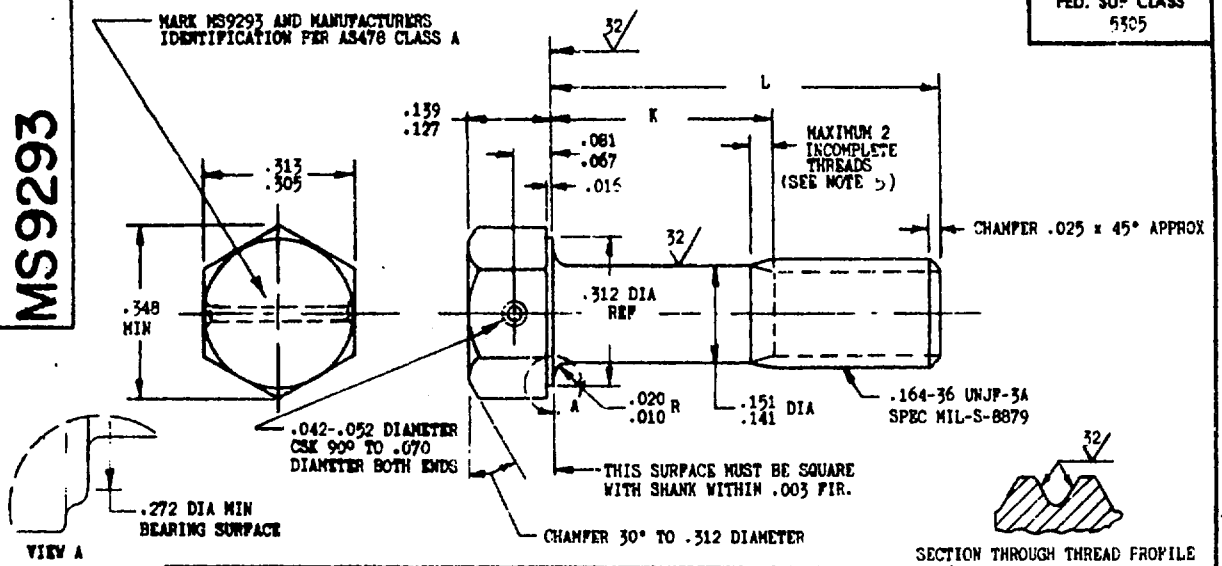

PART NUMBER	L	K	APPROX WEIGHT LB/100	PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9293-03	.312	.062-.082	.46				
MS9293-04	.375	.062-.082	.49				
MS9293-05	.438	.062-.082	.52				
MS9293-06	.500	.062-.082	.56				
MS9293-07	.562	.062-.082	.59				
MS9293-08	.625	.062-.082	.62				
MS9293-09	.688	.062-.110	.65				
MS9293-10	.750	.112-.172	.68				
MS9293-11	.812	.174-.234	.72				
MS9293-12	.875	.237-.297	.75				
MS9293-13	.938	.300-.360	.78				
MS9293-14	1.000	.362-.422	.81				
MS9293-15	1.062	.424-.484	.84				
MS9293-16	1.125	.487-.547	.87				
MS9293-17	1.188	.550-.610	.91				
MS9293-18	1.250	.612-.672	.94				
MS9293-19	1.312	.674-.734	.97				
MS9293-20	1.375	.737-.797	1.00				
MS9293-21	1.438	.800-.860	1.03				
MS9293-22	1.500	.862-.922	1.07				
MS9293-23	1.562	.924-.984	1.10				
MS9293-24	1.625	.987-1.047	1.13				
MS9293-25	1.688	1.050-1.110	1.16				
MS9293-26	1.750	1.112-1.172	1.19				
MS9293-27	1.875	1.237-1.297	1.26				
MS9293-28	2.000	1.362-1.422	1.32				

1. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
2. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF SCREW LENGTH.
3. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
4. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .010 FIR.
5. INCOMPLETE THREADS NOT TO ENTER FILLET.
6. MATERIAL: STEEL AMS 6322.
7. HARDNESS: ROCKWELL C26-32.
8. FINISH: BLACK OXIDE TREATMENT AMS 2485.
9. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
11. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON.
12. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ALGULAR DIMENSIONS ±5°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

(A) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972.
NO SUPERSEDING STANDARD.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 24 Sep 65 REVISED (A) 26 Oct 72

Review activities: USAF - 11 Navy - AS

This standard has been approved by the Department of the Air Force (11) and the Department of the Navy (AS) and is mandatory for use by the military. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11	TITLE	MILITARY STANDARD
Other Cust Navy - AS	SCREW, MACHINE-STEEL AMS 6322, BLACK OXIDE, DRILLED, 1 HOLE, HEXAGON HEAD, .164-36 UNJF-3A	MS 9293
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) E-25-144

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.