
MS9884 (ASG)

FED. SUP. CLASS 5305

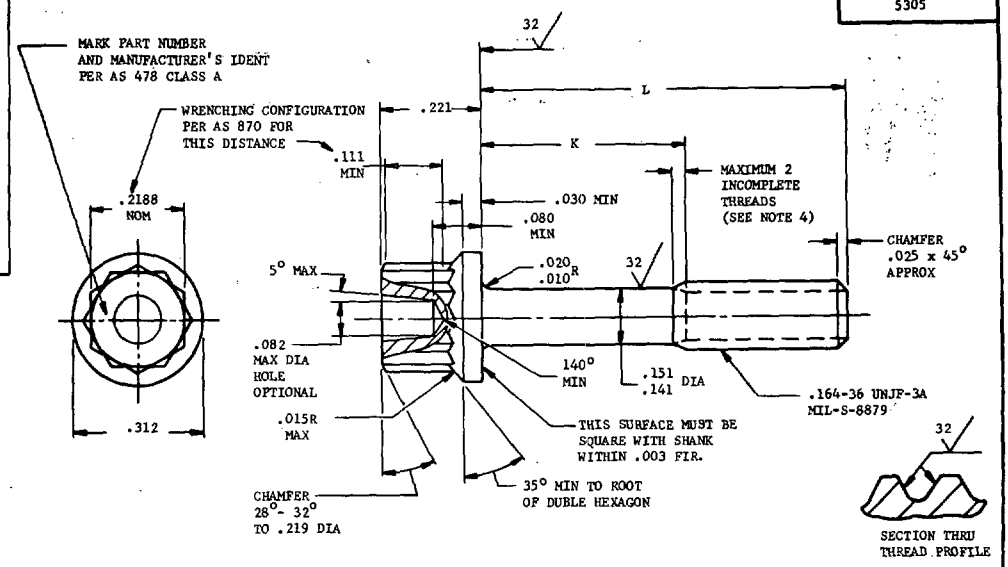

PART NO.	L	K	APPROX. WEIGHT LB/100
MS9884-02	.250	.062- .082	.425
MS9884-03	.312	.062- .082	.454
MS9884-04	.375	.062- .082	.484
MS9884-05	.438	.062- .082	.515
MS9884-06	.500	.062- .082	.544
MS9884-07	.562	.062- .082	.573
MS9884-08	.625	.062- .082	.603
MS9884-09	.688	.062- .110	.634
MS9884-10	.750	.112- .172	.662
MS9884-11	.812	.174- .234	.691
MS9884-12	.875	.237- .297	.722
MS9884-13	.938	.300- .360	.751
MS9884-14	1.000	.362- .422	.780
MS9884-15	1.062	.424- .484	.811
MS9884-16	1.125	.487- .547	.840
MS9884-17	1.188	.550- .610	.869
MS9884-18	1.250	.612- .672	.900
MS9884-19	1.312	.674- .734	.928
MS9884-20	1.375	.737- .797	.957
MS9884-21	1.438	.800- .860	.986
MS9884-22	1.500	.862- .922	1.018
MS9884-23	1.562	.924- .984	1.047
MS9884-24	1.625	.987-1.047	1.077
MS9884-25	1.688	1.050-1.110	1.104
MS9884-26	1.750	1.112-1.172	1.135
MS9884-27	1.812	1.174-1.234	1.167
MS9884-28	1.875	1.237-1.297	1.196
MS9884-29	1.938	1.300-1.360	1.226
MS9884-30	2.000	1.362-1.422	1.254

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF SCREW LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .005 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5616.
6. MANUFACTURING SPECIFICATION: AMS 7470 EXCEPT HEAD SHALL BE UPSET.
7. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
8. HARDNESS: ROCKWELL C32-38.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

Review activities: MSAF - 82, 85

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

APPROVED 3 Mar 69 REVISED

P.A. USAF - 11	TITLE SCREW, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, AMS 5616, .164-36 UNJF-3A	MILITARY STANDARD
Other Cust Navy - AS		MS9884 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)
ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Project No. 5305-F010

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-517/A-5041

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.