MILITARY SPECIFICATION
SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER
TYPES 2N4865, 2N5250, 2N5251 and
TX2N4865, TX2N5250, TX2N5251

Page 2

1.4, Under h_{FE}, at I_C=20 Adc: Change Max. column from "120" to "90".

Page 13

Subgroup 3, Group A, 1st h_{FE} test at I_C=20 Adc: Change limits column from "30-120" to "30-90".

Page 27

Figure 1, View A: Change limits ".510-550" to read ".470-.550" and ".420-.460" to read ".380-.460".

Page 29

Figure 3: Replace with new Figure 3, see below.

Page 32

Figure 7: Replace "R_S = 1Ω" to read "R_S = .1Ω" and replace clamp voltages with the following; 2N4865=80V, 2N5250=100V, 2N5251=150V.

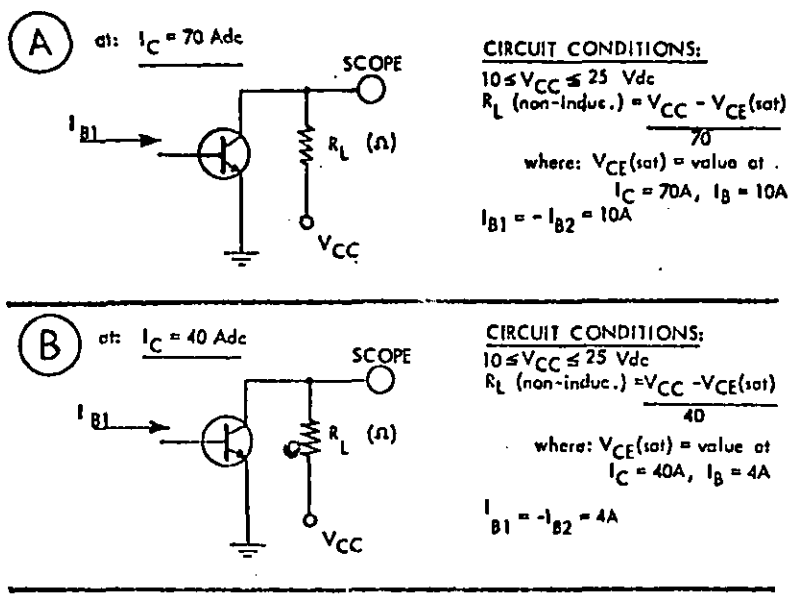

Figure 3. Pulse Response test circuit(s).

Custodian
Army-EL

Preparing activity
Army-EL
Project Nr. 5961-A490
FSC-5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T15:36Z
Check the source to verify that this is the current version before use.