MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, ADVANCED LOW-POWER SCHOTTKY TTL, DECODERS,

MONOLITHIC SILICON

This amendment forms a part of Military Specification MIL-M-38510/377(USAF), dated 9 August 1983, and is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2.3, Case outline, letter X: Delete "X" and substitute "2".

1.3, Thermal resistance, junction to case (θ_{JC}), Delete in its entirety and substitute:

"Thermal resistance, junction to case (θ_{JC}):
Cases (any case in MIL-M-38510) - - - - - - (see MIL-M-38510, appendix C)
Cases (all LCC's) - - - - - - - - - - - - - 0.08°C/W 2/"

After Junction temperature (T_J), add: "3/".

Bottom of page, add the following new footnotes:

"2/ When a thermal resistance value is included in MIL-M-38510, appendix C, it shall supersede the value stated herein.

"3/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions per method 5004 of MIL-STD-883."

PAGE 2

1.4, after Supply voltage, add: "(V_{CC})". After Case operating temperature range, add: "(T_C)".

3.2.4, last sentence: Delete "All manufacturers'" and substitute "All qualified manufacturers'".

3.3: Delete "(see 6.5)" and substitute "(see 5.4)".

PAGE 4

3.5, delete in its entirety and substitute: "3.6 Marking. Marking shall be in accordance with MIL-M-38510."

TABLE II, Group A test requirements, Class B devices, add: "8".

4.2a(1): Delete "or E".

4.2c, delete in its entirety and substitute: "c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510."

PAGE 5

4.4.3b(1): Delete "or E".

6.1: Delete in its entirety.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:32Z
Check the source to verify that this is the current version before use.

PAGE 6

FIGURE 1, Device type 01, Case X: Delete "Case X" and substitute "Case 2".

FIGURE 1, Device type 01, Case 2, delete and substitute the following:

Device type 01
Case 2

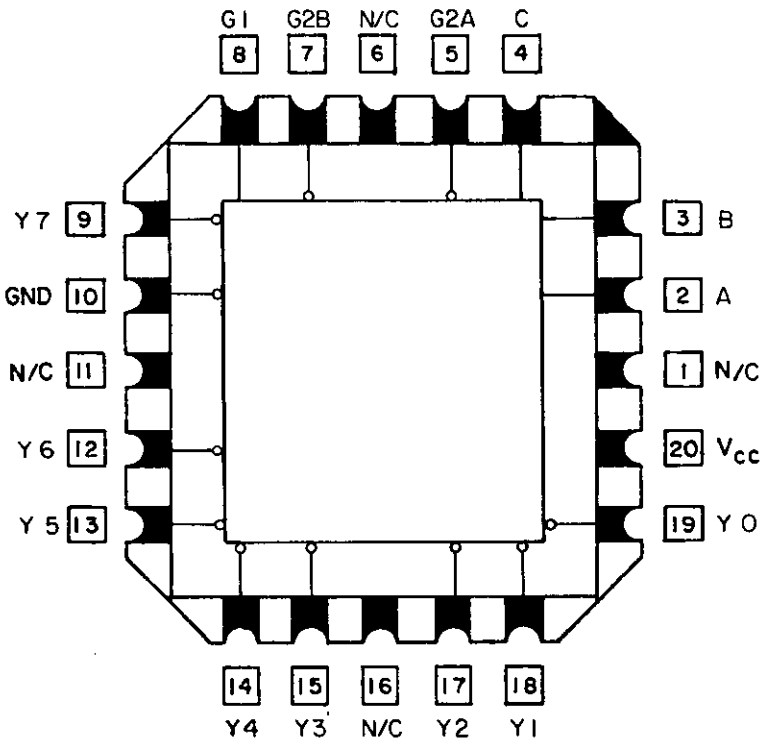

PAGE 7

FIGURE 2: Delete and substitute new figure 2 as printed on page 4 of this amendment.

PAGE 10

TABLE III: Delete "Case X" and substitute "Case 2". Make this same change on pages 11, 12, and 13.

TABLE III, Subgroup 1, Tests 12 through 16, Pin 1: Delete values listed and substitute "2.0 V", "0.8 V", "2.0 V", "0.8 V", and "2.0 V" respectively.

TABLE III, Subgroup 1, Tests 12 through 16, Pin 3: Delete values listed and substitute "0.8 V", "2.0 V", "2.0 V", "2.0 V" and "2.0 V" respectively.

PAGE 13

Footnote 1/: Delete "Case X" and substitute "Case 2".

Footnote 6/: Delete in its entirety and substitute "6/ The output voltages shall be H>1.5 V and L<1.5 V."

PAGE 14

6.3, GND: Delete "Electrical ground (common terminal)" and substitute "Ground zero voltage potential."

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:32Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 19, 85, 99
DLA - ES


Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5962-F673)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:32Z
Check the source to verify that this is the current version before use.

Device type 01

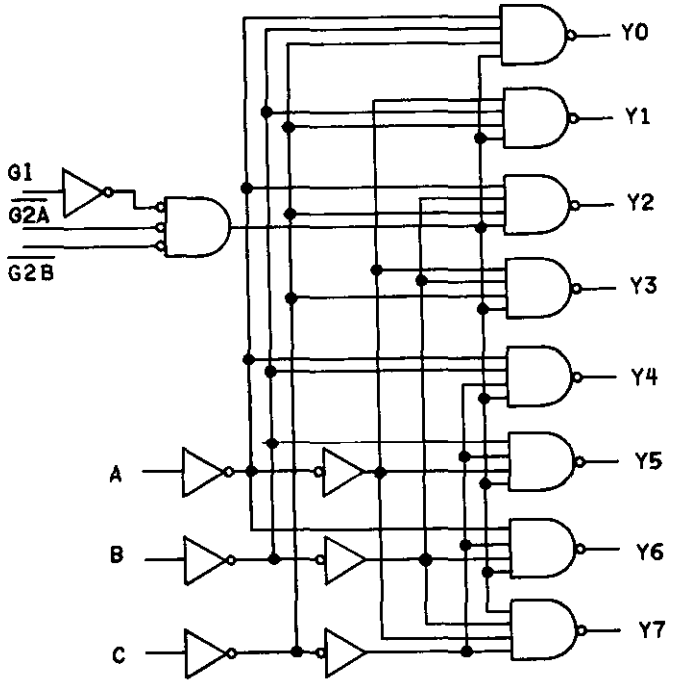

Device type 01

Inputs					Outputs							
Enable		Select										
G1	G2*	C	B	A	Y0	Y1	Y2	Y3	Y4	Y5	Y6	Y7
X	H	X	X	X	H	H	H	H	H	H	H	H
L	X	X	X	X	H	H	H	H	H	H	H	H
H	L	L	L	L	L	H	H	H	H	H	H	H
H	L	L	L	H	H	L	H	H	H	H	H	H
H	L	L	H	L	H	H	L	H	H	H	H	H
H	L	L	H	H	H	H	H	L	H	H	H	H
H	L	H	L	L	H	H	H	H	L	H	H	H
H	L	H	L	H	H	H	H	H	H	L	H	H
H	L	H	H	L	H	H	H	H	H	H	L	H
H	L	H	H	H	H	H	H	H	H	H	H	L

*G2 = G2A + G2B
H = high level, L = low level, X = irrelevant.

FIGURE 2. Logic diagram and truth table.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1988 — 505-038/20419

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:32Z
Check the source to verify that this is the current version before use.