INCH-POUND

MIL-M-38510/377(USAF)
AMENDMENT 2
18 June 1992
SUPERSEDING
AMENDMENT 1
9 November 1984

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, ADVANCED LOW-POWER SCHOTTKY TTL, DECODERS, MONOLITHIC SILICON

This amendment forms a part of MIL-M-38510/377(USAF), dated 9 August 1983 and is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2.3, Case outline, letter X: Delete "X" and substitute "2".

1.3, Thermal resistance, junction to case (Θ_{JC}), Delete in its entirety and substitute:

"Thermal resistance, junction to case (Θ_{JC}):
Cases (any case in MIL-M-38510) - - - - - - (see MIL-M-38510, appendix C)
Cases (all LCC's) - - - - - - - - - - - - - 0.08°C/W 2/"

After Junction temperature (T_J), add: "3/".

Bottom of page, add the following new footnotes:

"2/ When a thermal resistance value is included in MIL-M-38510, appendix C, it shall supersede the value stated herein.

"3/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions per method 5004 of MIL-STD-883."

PAGE 2

1.4, after Supply voltage, add: "(V_{CC})". After Case operating temperature range, add: "(T_C)".

3.2.4, last sentence: Delete "All manufacturers'" and substitute "All qualified manufacturers'".

3.3: Delete "(see 6.5)" and substitute "(see 6.4)".

PAGE 3

* TABLE I, Output current, I_O, Min limits column: Delete "-30" and substitute "-20".

PAGE 4

3.6, delete in its entirety and substitute: "3.6 Marking. Marking shall be in accordance with MIL-M-38510."

TABLE II, Group A test requirements, Class B devices, add: "8".

4.2a(1): Delete "or E".

4.2c, delete in its entirety and substitute: "c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:32Z
Check the source to verify that this is the current version before use.

Air Force - 1/

PAGE 5

4.4.3b(1): Delete "or E".


6.1: Delete in its entirety.

PAGE 6

FIGURE 1, Device type 01, Case X: Delete "Case X" and substitute "Case 2".

FIGURE 1, Device type 01, Case 2, delete and substitute the following:

Device type 01
Case 2

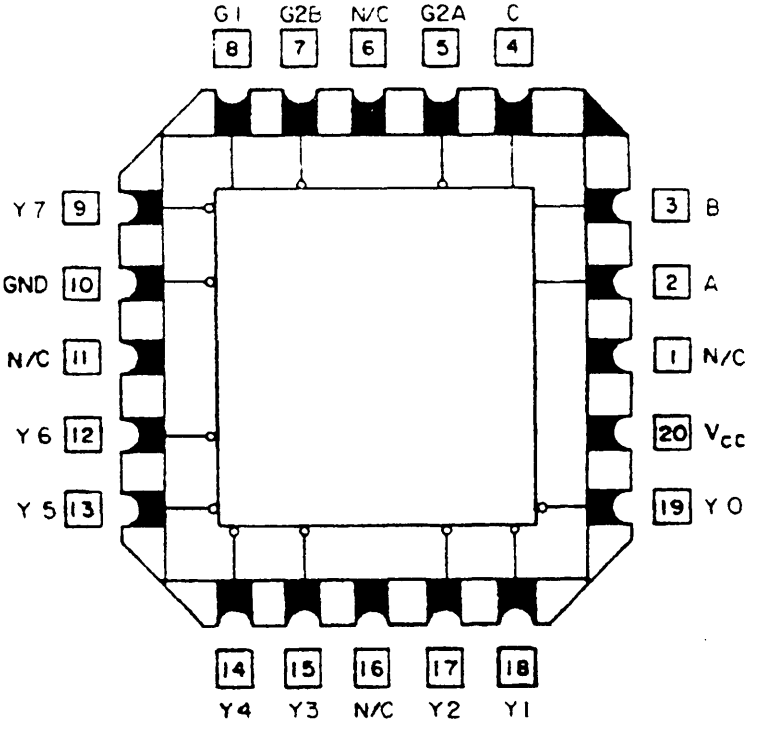

PAGE 7

FIGURE 2: Delete and substitute new figure 2 as printed on page 4 of this amendment.

PAGE 10

TABLE III: Delete "Case X" and substitute "Case 2". Make this same change on pages 11, 12, and 13.

TABLE III, Subgroup 1, Tests 12 through 16, Pin 1: Delete values listed and substitute "2.0 V", "0.8 V", "2.0 V", "0.8 V", and "2.0 V", respectively.

TABLE III, Subgroup 1, Tests 12 through 16, Pin 3: Delete values listed and substitute "0.8 V", "2.0 V", "2.0 V", "2.0 V" and "2.0 V", respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:32Z
Check the source to verify that this is the current version before use.

PAGE 13

Footnote 1/: Delete "Case X" and substitute "Case 2".

* Footnote 4/: Delete in its entirety and substitute "4/ I_O limits shall be -20/-112 mA for circuit A and -30/-110 mA for circuit C."

Footnote 6/: Delete in its entirety and substitute "6/ The output voltages shall be H > 1.5 V and L < 1.5 V."

PAGE 14

6.3, GND: Delete "Electrical ground (common terminal)" and substitute "Ground zero voltage potential."

The margins of this amendment are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

CONCLUDING MATERIAL

Custodians:
Air Force - 17

Review activities:
Air Force - 19, 85, 99
DLA - ES


Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-F724)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:32Z
Check the source to verify that this is the current version before use.

Device type 01

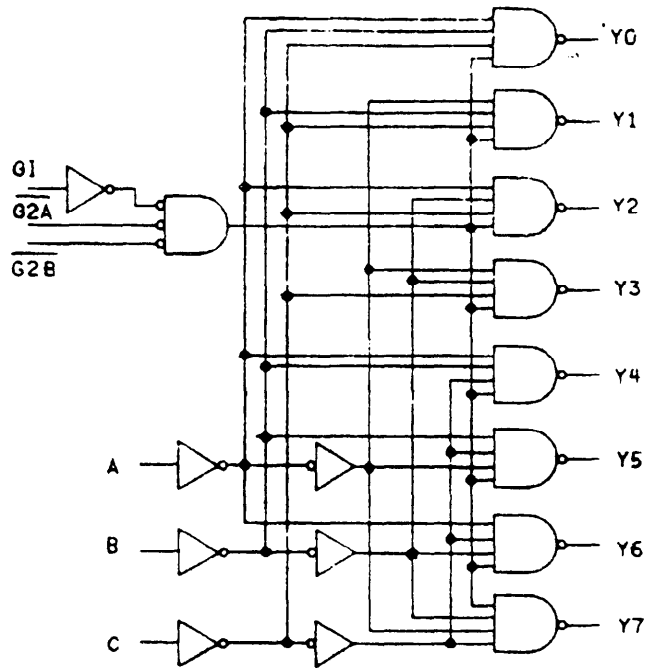

Device type 01

Inputs					Outputs							
Enable		Select										
G1	G2*	C	B	A	Y0	Y1	Y2	Y3	Y4	Y5	Y6	Y7
X	H	X	X	X	H	H	H	H	H	H	H	H
L	X	X	X	X	H	H	H	H	H	H	H	H
H	L	L	L	L	L	H	H	H	H	H	H	H
H	L	L	L	H	H	L	H	H	H	H	H	H
H	L	L	H	L	H	H	L	H	H	H	H	H
H	L	L	H	H	H	H	H	L	H	H	H	H
H	L	H	L	L	H	H	H	H	L	H	H	H
H	L	H	L	H	H	H	H	H	H	L	H	H
H	L	H	H	L	H	H	H	H	H	H	L	H
H	L	H	H	H	H	H	H	H	H	H	H	L

*G2 = G2A + G2B
H = high level, L = low level, X = irrelevant.

FIGURE 2. Logic diagram and truth table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:32Z
Check the source to verify that this is the current version before use.