INCH-POUND

MIL-M-38510/381(USAF)
AMENDMENT 3
24 November 1998
SUPERSEDING
AMENDMENT 2
25 January 1988

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED LOW-POWER SCHOTTKY, TTL, CASCADABLE, DECADE COUNTERS, MONOLITHIC SILICON

INACTIVE FOR NEW DESIGN AFTER 7 November 1996

This amendment forms a part of MIL-M-38510/381(USAF), dated 21 February 1984, and is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

	Replacement page	Page replaced
*	13	new page
*	14	new page

PAGE 1

Title: Delete and substitute as printed above.

1.2.1, Device type, delete and substitute:

"1.2.1 Device types. The device types shall be as follows:

Device type	Circuit
01	Synchronous 4-bit decade counter (asynchronous clear), cascadable
02	Synchronous 4-bit decade counter (synchronous clear), cascadable
03	Synchronous 4-bit UP/DOWN decade counter, cascadable
04	Synchronous 4-bit decade counter with 3-state outputs, cascadable
05	Synchronous 4-bit UP/DOWN decade counter, with 3-state outputs, cascadable

1.2.3, Case outline, add the following:

"X C-2A (20 - terminal, .350" x .350"), square chip carrier package"

1.3, Thermal resistance, delete and substitute:

"Thermal resistance, junction-to-case (θ_{JC}):
Cases E, F, R, S, X, and 2 - - - - - - (See MIL-M-38510, appendix C)"

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:34Z
Check the source to verify that this is the current version before use.

1.3, Junction temperature (T_J) 3/: Delete "3/" as added in amendment 1 and substitute "2/".

Bottom of page: Delete footnote 2/ in its entirety (added in Amendment 1).

Add footnote 2/ as follows:

"2/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions per method 5004 of MIL-STD-883."

PAGE 3

* 3.2.4, delete and substitute:

"Schematic circuits. Schematic circuits shall be submitted to the preparing activity prior to inclusion of the manufacturer's device in the specification and shall be submitted to the qualifying activity and agent activity (DSCC-VAS) as a prerequisite for qualification. All qualified manufacturers' schematics shall be maintained by the agent activity and will be available upon

3.2.5, Case outlines: Delete "as specified in" and substitute "in accordance with".

PAGE 6

TABLE I, t_{PLH8}, minimum limits column: Delete "5" and substitute "3".

PAGE 8

TABLE II, Class B devices column, Group A test requirements: Add "8".

PAGE 9

4.2.a(1), after test condition D: Add "or E".

4.2.3b(1), after test condition D: Add "or E".

4.4.3b(3), delete "appendix B of MIL-M-38510 and".

PAGE 11

FIGURE 1, device types 01, 02, and 03: Delete "Case 2" and substitute "Cases X and 2".

PAGE 12

FIGURE 1, device types 04 and 05: Delete "Case 2" and substitute "Cases X and 2".

PAGE 46

TABLE III, Symbol I_0, Test no. 51, minimum and maximum limits: Delete "-15" and "-70" and substitute "-30" and "-112", respectively .

PAGES 46 through 57

TABLE III: Delete "Case 2" and substitute "Cases X, 2".

PAGE 47

TABLE III, pin QB, Test nos. 72, 73, 74, 75, 76, and 77: Delete "L" and substitute "H" (6 places).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:34Z
Check the source to verify that this is the current version before use.

PAGE 49

TABLE III, t_{PLH8}, Test no. 160, minimum limits column: Delete "5" and substitute "3".

TABLE III, t_{PLH8}, Test no. 172, minimum limits column: Delete "5" and substitute "3".

PAGE 50

TABLE III, Test no. 51, minimum and maximum limits columns: Delete "-15" and "-70" and substitute "-30" and "-112" , respectively.

PAGE 55

TABLE III, Test no. 51, minimum and maximum limits columns: Delete "-15" and "-70" and substitute "-30" and "-112" , respectively.

PAGE 58

TABLE III, Cases R, S, X: Add "2".

PAGES 59 through 67

TABLE III, Cases R, S, 2: Add "X".

PAGE 68

TABLE III, Cases R, S, X: Add "2"

PAGE 69

6.1: Delete in its entirety.

The margins of this amendment are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous amendment.

Custodians:
Air Force - 17

Review activities:
Air Force - 19, 85, 99

Preparing activity:
DLA - CC

(Project 5962-1829)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:34Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 04
CASES R AND S

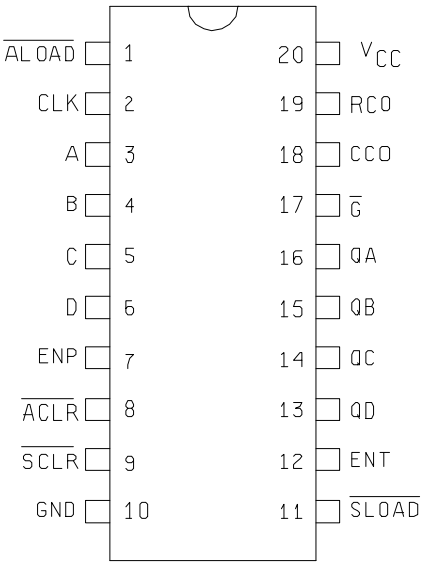

DEVICE TYPE 05
CASES R AND S

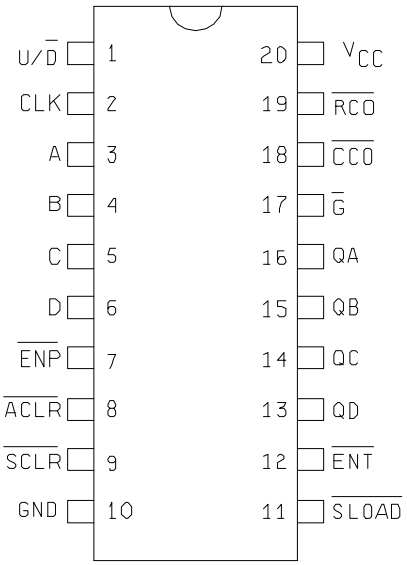

FIGURE 1. TERMINAL CONNECTIONS (TOP VIEW) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:34Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 01

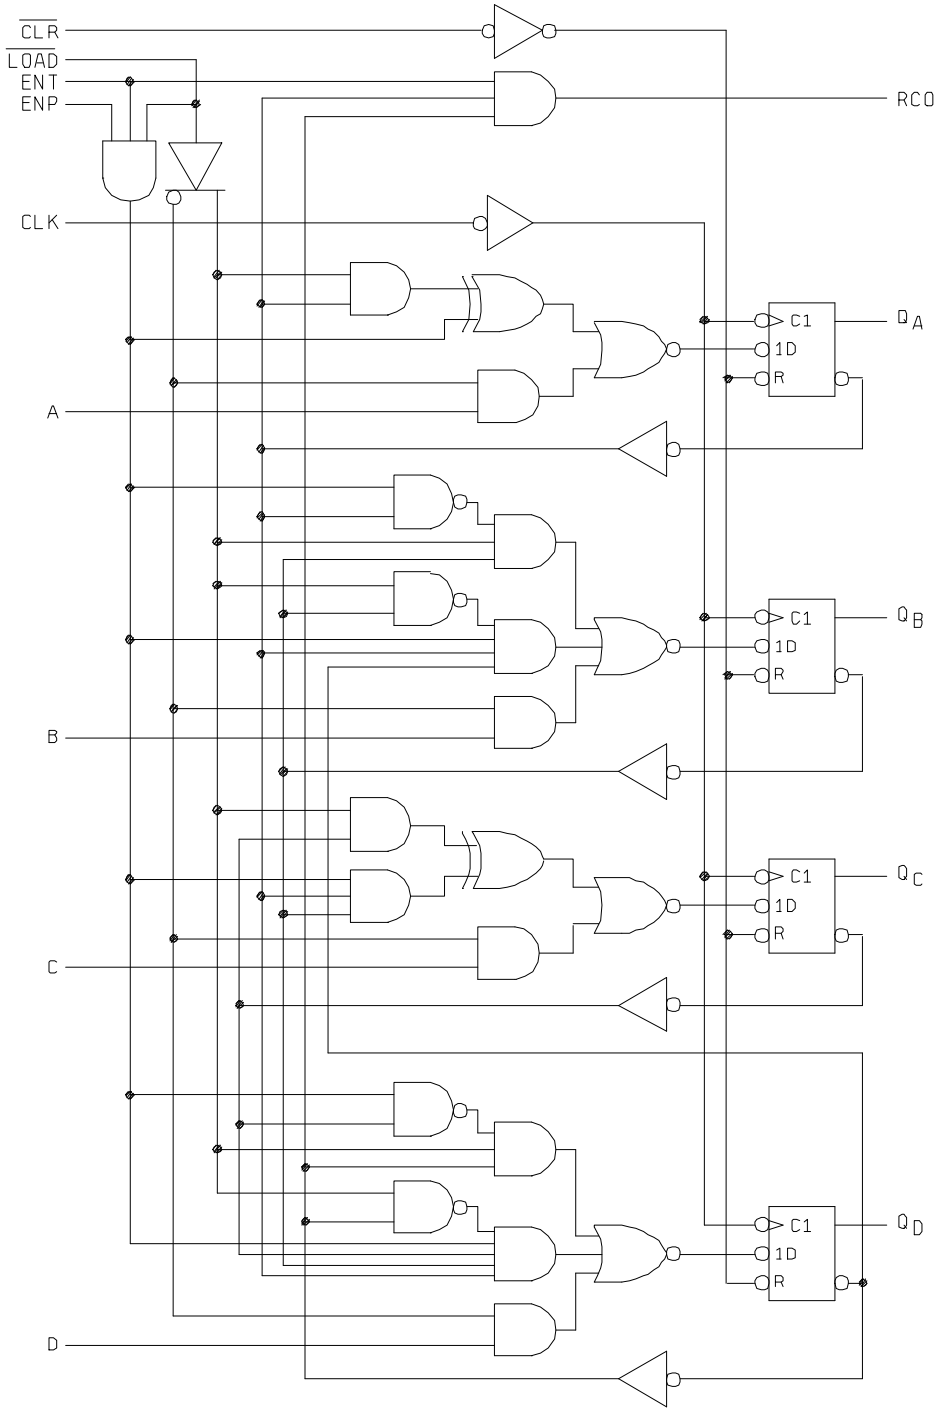

FIGURE 2. Logic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:34Z
Check the source to verify that this is the current version before use.