INCH-POUND

MIL-M-38510/384A
8 November 2004
SUPERSEDING
MIL-M-38510/384(USAF)
7 December 1983

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED LOW POWER SCHOTTKY TTL, AND, OR, NAND AND NOR GATES, MONOLITHIC SILICON

Inactive for new design after 8 July 1997.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and MIL-PRF 38535

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, advanced low power Schottky TTL, positive AND, OR, NAND, and NOR logic gating microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided for each type and are reflected in the complete part number. For this product, the requirements of MIL-M-38510 have been superseded by MIL-PRF-38535, (see 6.3).

1.2 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-38535, and as specified herein.

1.2.1 Device types. The device types are as follows:

Device type	Circuit
01	Quadruple, 2-input NAND gate, buffer output
02	Quadruple, 2-input NOR gate, buffer output
03	Quadruple, 2-input NAND gate, open collector, buffer output
04	Quadruple, 2-input AND gate, buffer output
05	Triple 3-input NAND gate, buffer output
06	Triple 3-input AND gate, buffer output
07	Dual 4-input NAND gate, buffer output
08	Quadruple, 2-input OR gate, buffer output
09	Hex 1-input inverter gate, buffer output
10	Hex 1-input inverter gate, open collector, buffer output
11	Hex 1-input noninverting gate, buffer output
12	Hex 1-input noninverting gate, open collector, buffer output

1.2.2 Device class. The device class is the product assurance level as defined in MIL-PRF-38535.

Comments, suggestions, or questions on this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAS, P. O. Box 3990, Columbus, OH 43218-3990, or emailed to bipolar@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 5962

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

1.2.3 Case outlines. The case outlines are as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	Terminals	Package style
A	GDFP5-F14 or CDFP6-F14	14	Flat pack
B	GDFP4-14	14	Flat pack
C	GDIP1-T14 or CDIP2-T14	14	Dual-in-line
D	GDFP1-F14 or CDFP2-F14	14	Flat pack
2	CQCC1-N20	20	Square leadless chip carrier

1.3 Absolute maximum ratings.

Supply voltage range ..... -0.5 V dc to +7.0 V dc
Input voltage range ..... -1.5 V dc at -18 mA to +7.0 V dc
Storage temperature range ..... -65° to +150°C
Maximum power dissipation (P_D), per device: 1/
- Device 01, 03 ..... 35.2 mW dc
- Device 02, 04 ..... 44 mW dc
- Device 05, 06 ..... 33 mW dc
- Device 07 ..... 17.6 mW dc
- Device 08 ..... 55 mW dc
- Device 09, 10 ..... 66 mW dc
- Device 11, 12 ..... 77 mW dc
- Lead temperature (soldering, 10 seconds) ..... +300°C

Thermal resistance, junction to case (θ_{JC}):
- Cases A, B, C, D, and 2 ..... (See MIL-STD-1835)

Junction temperature (T_J) 2/ ..... 175°C

1.4 Recommended operating conditions.

Supply voltage (V_{CC}) ..... 4.5 V dc minimum to 5.5 V dc maximum
Minimum high level input voltage (V_{IH}) ..... 2.0 V dc
Maximum low level input voltage (V_{IL}) ..... 0.8 V dc
Case operating temperature range (T_C) ..... -55° to +125°C

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

1/ Must withstand the added P_D due to short-circuit test (e.g., I_O).
2/ Maximum junction temperature should not be exceeded except in accordance with allowable short duration burn-in screening condition in accordance with MIL-PRF-38535.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-38535 - Integrated Circuits (Microcircuits) Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard for Microelectronics.
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this document takes precedence.

3. REQUIREMENTS

3.1 Qualification. Microcircuits furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.3 and 6.4).

3.2 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein.

3.3.1 Case outlines. The case outlines shall be as specified in 1.2.3.

3.3.2 Logic diagrams and terminal connections. The logic diagrams and terminal connections shall be as specified on figure 1.

3.3.3 Truth tables and logic equations. The truth tables and logic equations shall be as specified on figure 2.

3.3.4 Schematic circuits. The schematic circuits shall be maintained by the manufacturer and made available to the qualifying activity and the preparing activity upon request.

3.4 Lead material and finish. The lead material and finish shall be in accordance with MIL-PRF-38535 (see 6.6).

3.5 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55°C \le T_C \le +125°C$ unless otherwise specified	Device type	Limits		Unit
				Min	Max	
High level output voltage	V_{OH}	V_{CC} = 4.5 V, V_{IH} = 2.0 V, I_{OH} = -1.0 mA, V_{IL} = 0.8 V	01, 02, 04 05, 06, 07 08, 09, 11	2.4		V dc
Low level output voltage	V_{OL}	V_{CC} = 4.5 V, I_{OL} = 12 mA, V_{IL} = 0.8 V, V_{IH} = 2.0 V	All		0.4	V dc
Input clamp voltage	V_{IC}	V_{CC} = 4.5 V, I_{IN} = -18 mA, T_C = +25°C	All		-1.5	V dc
Low level input current	I_{IL}	V_{CC} = 5.5 V, V_{IN} = 0.4 V	All	0	-100	µA
High level input current	I_{IH1}	V_{CC} = 5.5 V, V_{IN} = 2.7 V	All		20	µA
	I_{IH2}	V_{CC} = 5.5 V, V_{IN} = 7.0 V	All		100	µA
Output current 1/	I_O	V_{CC} = 5.5 V, V_O = 2.25 V	01, 02, 04 05, 06, 07, 08	-15	-112	mA
			09	-30	-112	
			11	-20	-112	
Collector cut-off current	I_{CEX}	V_{CC} = 4.5 V, V_{IN} = 5.0 V, V_O = 5.5 V	03, 10, 12		100	µA
Supply current, outputs high	I_{CCH}	V_{CC} = 5.5 V	01, 03		1.6	mA
			02		2.8	
			04, 09, 10		3	
			05		1.2	
			06		2.3	
			07		0.8	
			11, 12		6	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55°C \le T_C \le +125°C$ unless otherwise specified		Device type	Limits		Unit
					Min	Max	
Supply current, outputs low	I_{CCL}	V_{CC} = 5.5 V		01, 03		7.8	mA
				02		9.0	
				04		9.3	
				05		6.0	
				06		7.0	
				07		3.9	
				08		10.6	
				09, 10		12.0	
				11, 12		14.0	
Propagation delay time low-to-high level	t_{PLH}	V_{CC} = 5.0 V, C_L = 50 pF ±10%	R_L = 500 Ω	01, 02, 05 07, 11	2	10	ns
				04	2	11	
				08	2	9	
				06	2	12	
				09	1	9	
			R_L = 680 Ω	03	10	40	
				10, 12	5	35	
Propagation delay time high-to-low level	t_{PHL}	V_{CC} = 5.0 V, C_L = 50 pF ±10%	R_L = 500 Ω	01, 02, 05 07	2	7	ns
				04, 06	3	11	
				08	3	12	
				09	1	8	
				11	1	10	
			R_L = 680 Ω	03	2	12	
				10	2	12	
				12	2	14	

1/ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS}.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-PRF-38535 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters	1	1
Final electrical test parameters	1*, 2, 3, 9, 10, 11	1*, 2, 3, 9
Group A test requirements	1, 2, 3, 9, 10, 11	1, 2, 3, 9, 10, 11
Group B electrical test parameters when using the method 5005 QCI option	1, 2, 3, 9, 10, 11	N/A
Group C end-point electrical parameters	1, 2, 3, 9, 10, 11	1, 2, 3
Group D end-point electrical parameters	1, 2, 3	1, 2, 3

*PDA applies to subgroup 1.

3.6 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.7 Marking. Marking shall be in accordance with MIL-PRF-38535.

3.8 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 9 (see MIL-PRF-38535, appendix A).

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not effect the form, fit, or function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38535 and shall be conducted on all devices prior to qualification and conformance inspection. The following additional criteria shall apply:

a. The burn-in test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. Additional screening for space level product shall be as specified in MIL-PRF-38535.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-38535.

4.4 Technology Conformance Inspection (TCI). Technology conformance inspection shall be in accordance with MIL-PRF-38535 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table III of MIL-PRF-38535 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, 7, and 8 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of MIL-PRF-38535.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table IV of MIL-PRF-38535 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. The steady-state life test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table V of MIL-PRF-38535. End-point electrical parameters shall be as specified in table II herein.


4.5 Methods of inspection. Methods of inspection shall be specified as follows:

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 01 AND 03

CASES A,B,C AND D

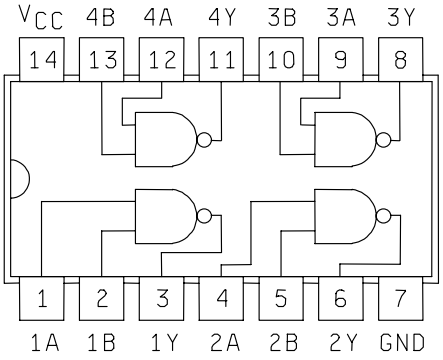

DEVICE TYPES 01 AND 03

CASE 2


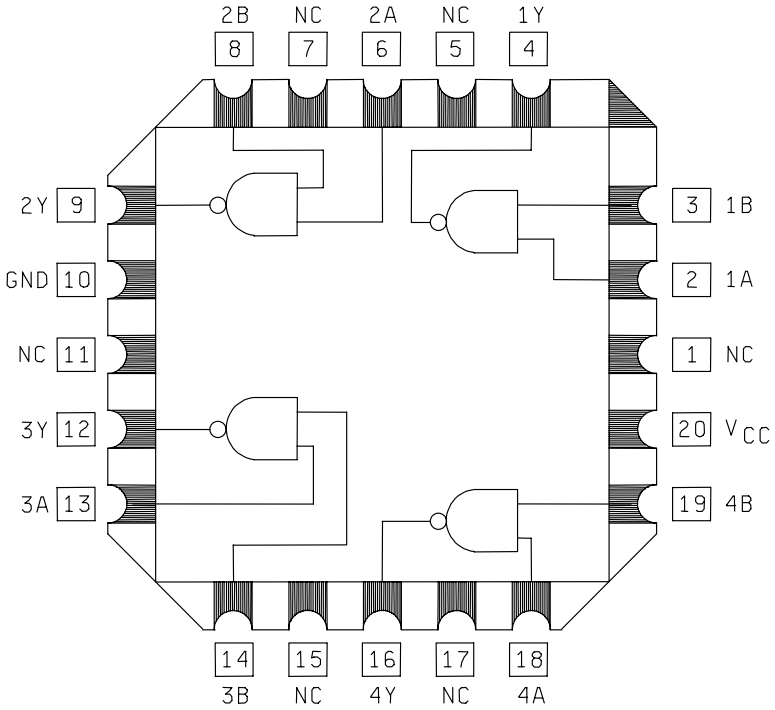


FIGURE 1. Logic diagram and terminal connections (top view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 02

CASES A,B,C,AND D

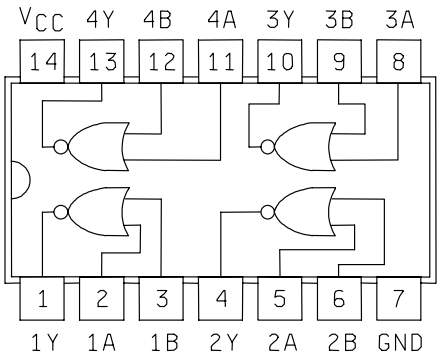

DEVICE TYPE 02

CASE 2


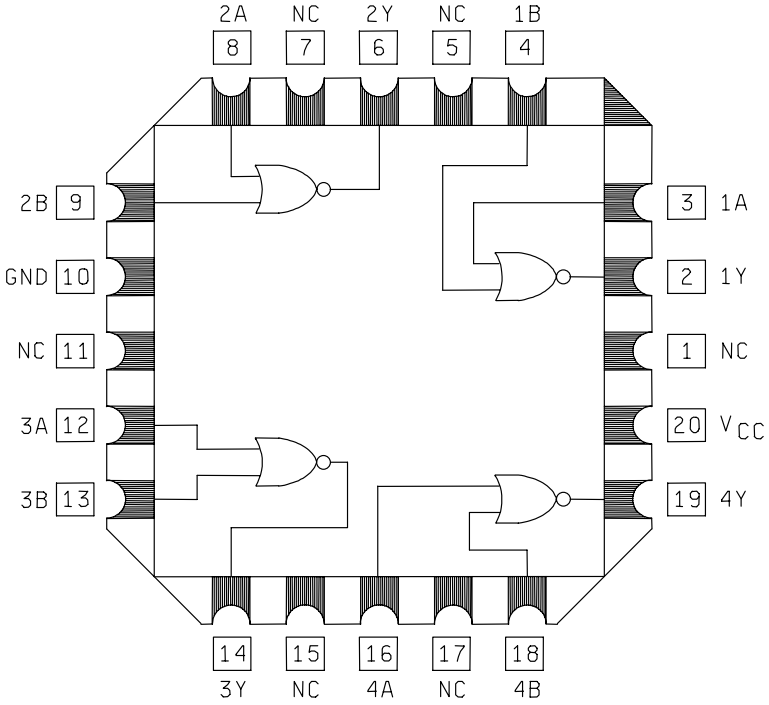


FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 04

CASES A,B,C AND D

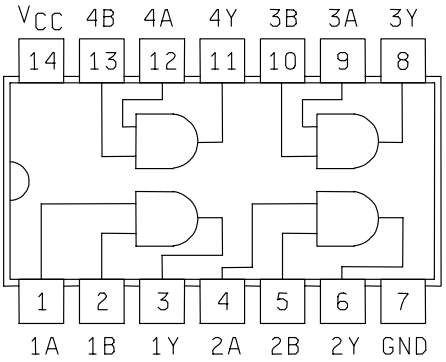

DEVICE TYPE 04

CASE 2


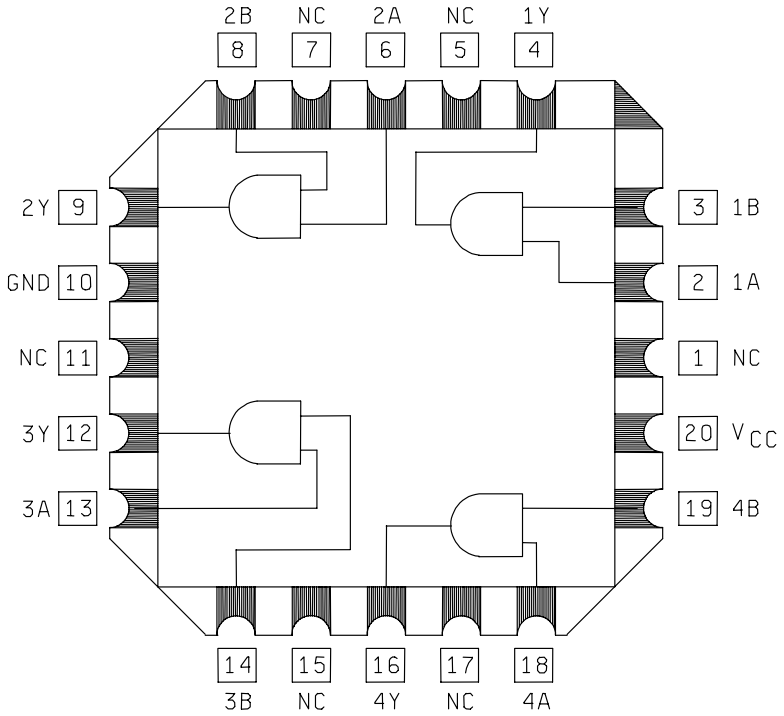


FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 05

CASES A,B,C AND D

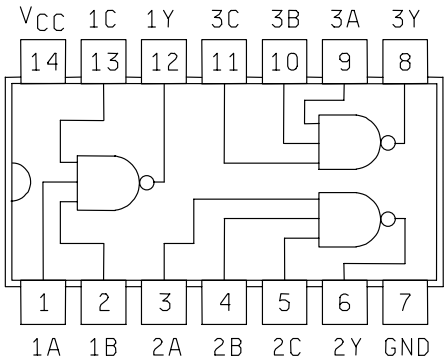

DEVICE TYPE 05

CASE 2


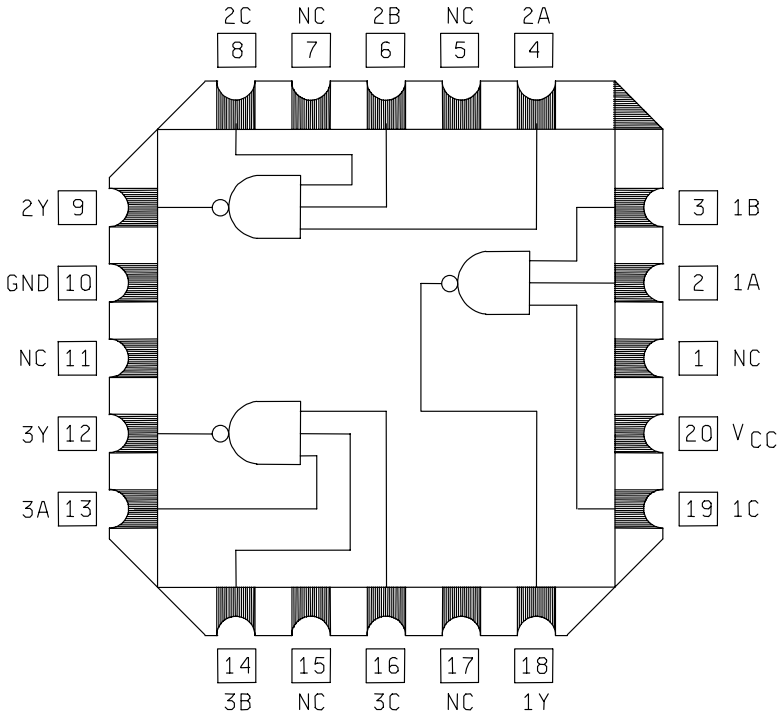


FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 06

CASES A,B,C AND D

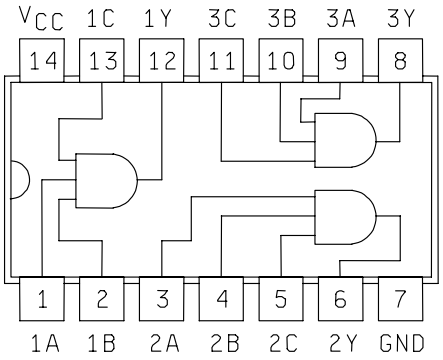

DEVICE TYPE 06

CASE 2


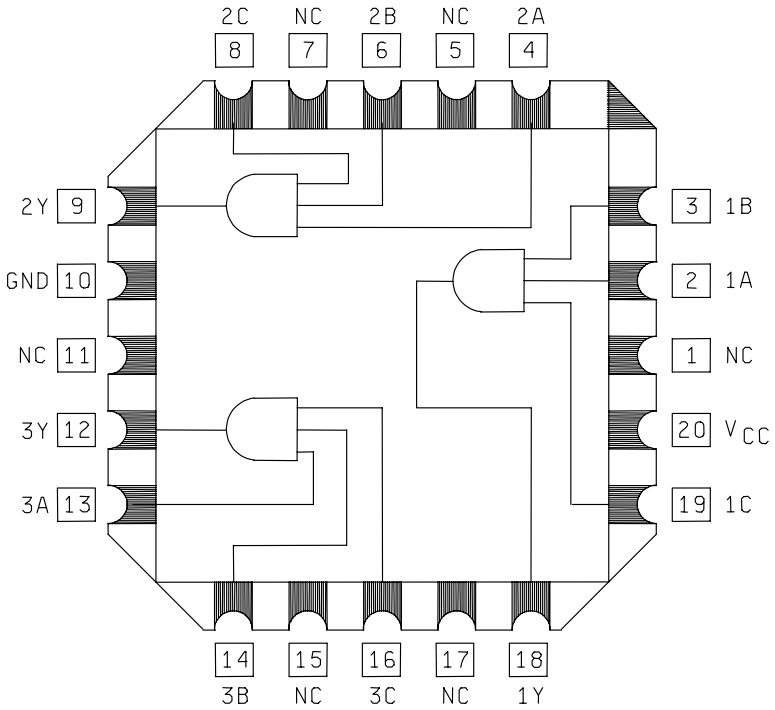


FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 07

CASES A,B,C AND D

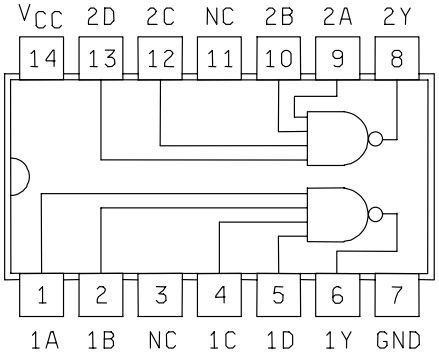

DEVICE TYPE 07

CASE 2


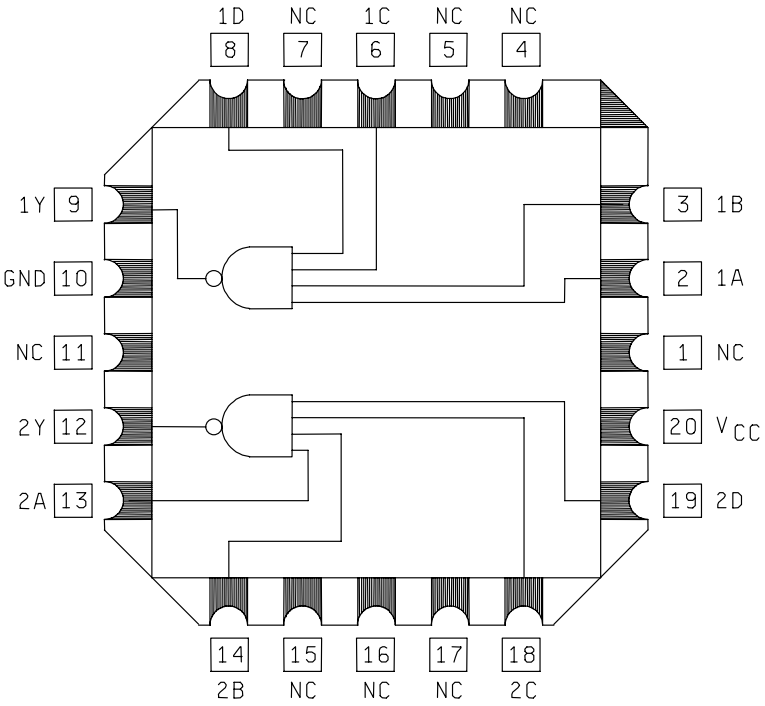


FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 08

CASES A,B,C,AND D

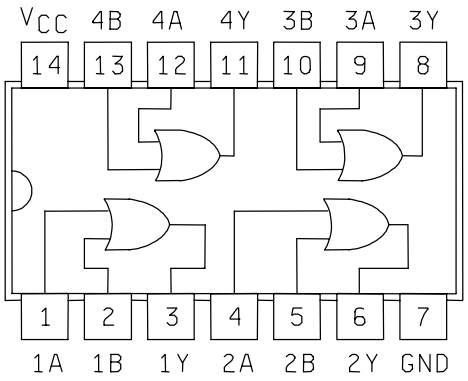

DEVICE TYPE 08

CASE 2


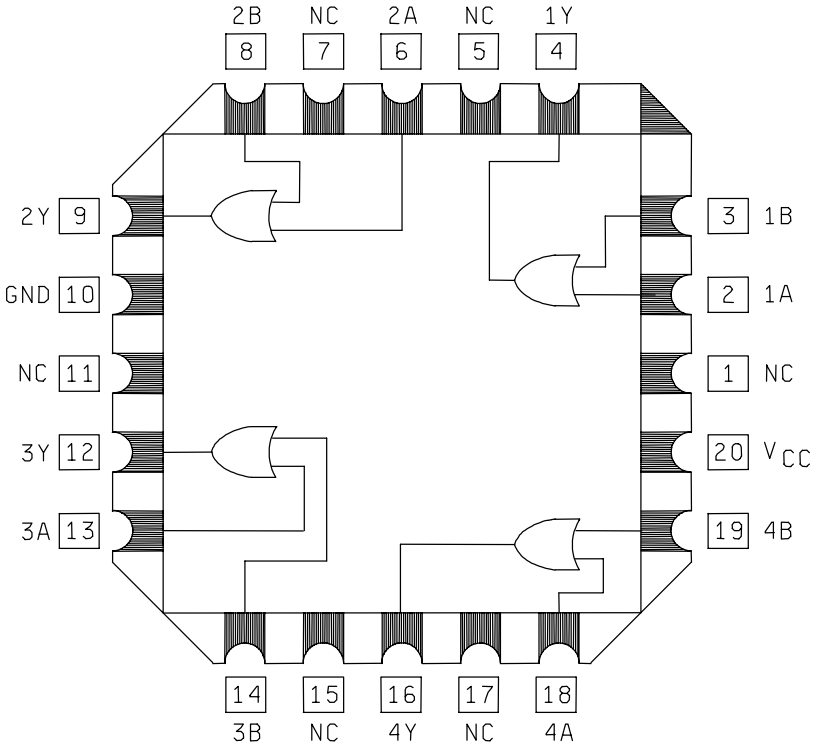


FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 09 AND 10

CASES A,B,C AND D

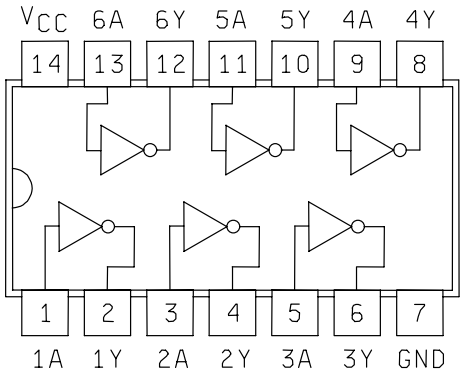

DEVICE TYPES 09 AND 10

CASES 2


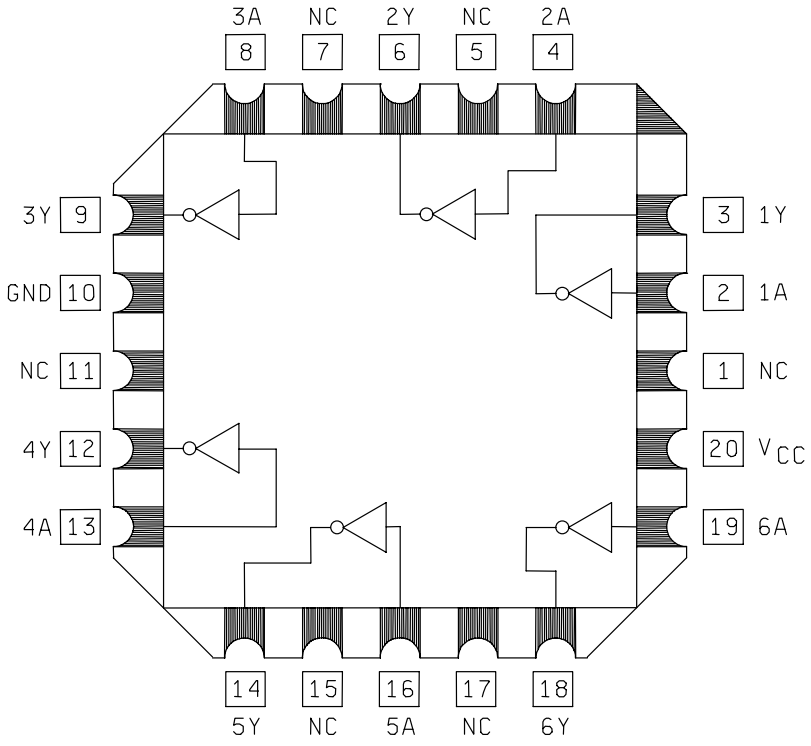


FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 11 AND 12
CASES A,B,C AND D

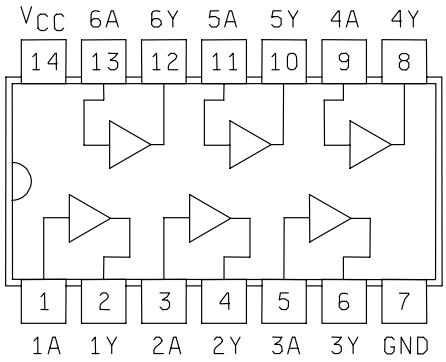

DEVICE TYPES 11 AND 12
CASE 2

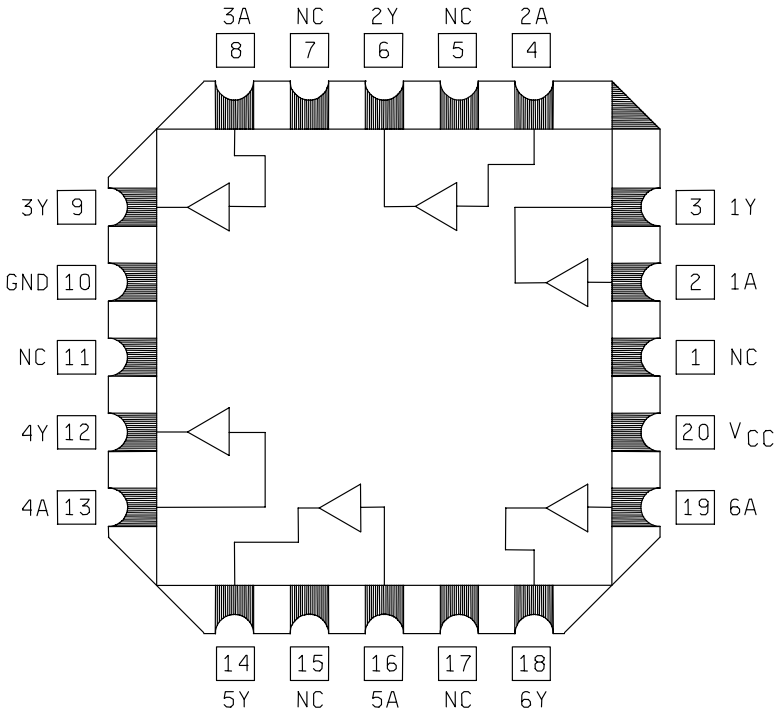


FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

Device types 01, 03

Truth table (each gate)		
Inputs		Output
A	B	Y
L	L	H
H	L	H
L	H	H
H	H	L

$Y = \overline{AB}$

Device type 02

Truth table (each gate)		
Inputs		Output
A	B	Y
L	L	H
H	L	L
L	H	L
H	H	L

$Y = \overline{A + B}$

Device type 04

Truth table (each gate)		
Inputs		Output
A	B	Y
L	L	L
H	L	L
L	H	L
H	H	H

$Y = AB$

Device type 05

Truth table (each gate)			
Inputs			Output
A	B	C	Y
L	L	L	H
H	L	L	H
L	H	L	H
L	L	H	H
H	H	L	H
H	L	H	H
L	H	H	H
H	H	H	L

$Y = \overline{ABC}$

Device type 06

Truth table (each gate)			
Inputs			Output
A	B	C	Y
L	L	L	L
H	L	L	L
L	H	L	L
L	L	H	L
H	H	L	L
H	L	H	L
L	H	H	L
H	H	H	H

$Y = ABC$

Device type 07

Truth table (each gate)				
Input				Output
A	B	C	D	Y
L	L	L	L	H
H	L	L	L	H
L	H	L	L	H
L	L	H	L	H
L	L	L	H	H
H	H	L	L	H
H	L	H	L	H
H	L	L	H	H
L	H	H	L	H
L	H	L	H	H
L	L	H	H	H
H	H	H	L	H
H	H	L	H	H
H	L	H	H	H
L	H	H	H	H
H	H	H	H	L

$Y = \overline{ABCD}$

Device type 08

Truth table (each gate)		
Inputs		Output
A	B	Y
L	L	L
H	L	H
L	H	H
H	H	H

$Y = A + B$

Device type 09 and 10

Truth table (each gate)	
Inputs	Output
A	Y
L	H
H	L

$Y = \overline{A}$

Device type 11 and 12


Truth table (each gate)	
Inputs	Output
A	Y
H	H
L	L

$Y = A$


FIGURE 2. Truth tables and logic equations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 01,02,03,05,07,09 AND 10

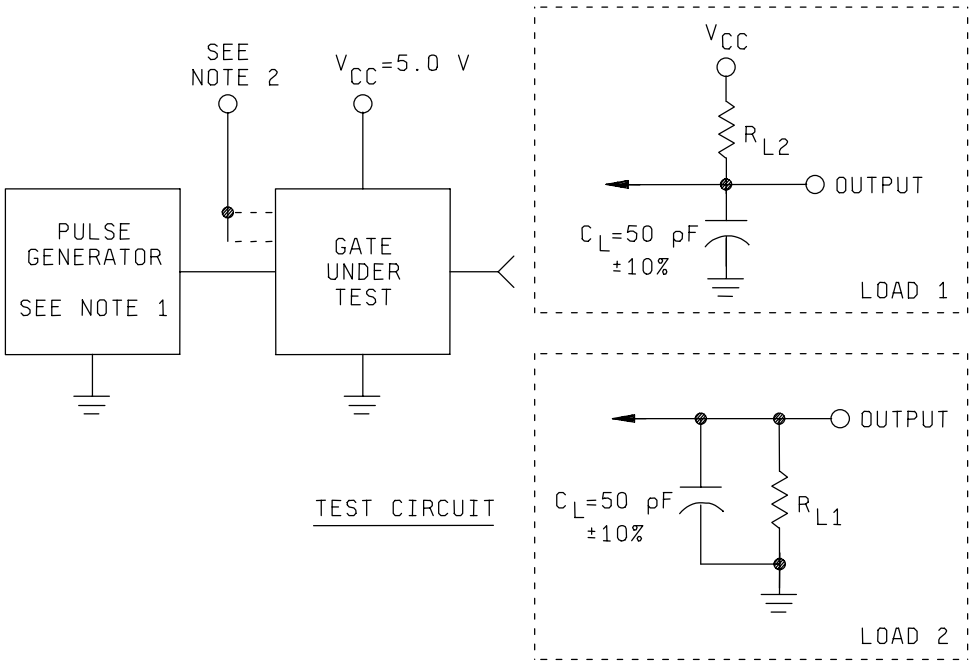

TEST CIRCUIT

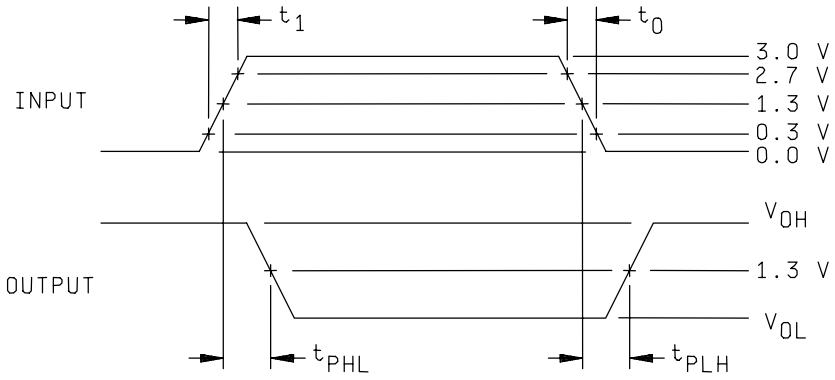

VOLTAGE WAVEFORMS


NOTES:

1. Input pulse characteristics: $t_1 = t_0 = 6 \pm 1.5$ ns; PRR ≤ 1.0 MHz; duty cycle = 50%.
2. Inputs not under test, for device types 01, 03, 05, and 07 are 2.7 V; for device type 02 is ground.
3. C_L = 50 pF ±10%, includes jig and probe capacitance.
4. R_{L1} = 499 Ω ±1% for device types 01, 02, 05, 07, and 09; R_{L2} = 680 Ω ±5% for device types 03 and 10.
5. Voltage measurements are to be made with respect to network ground terminal.


FIGURE 3. Switching time test circuit and waveforms for device types 01, 02, 03, 05, 07, 09, and 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 04,06,08,11 AND 12

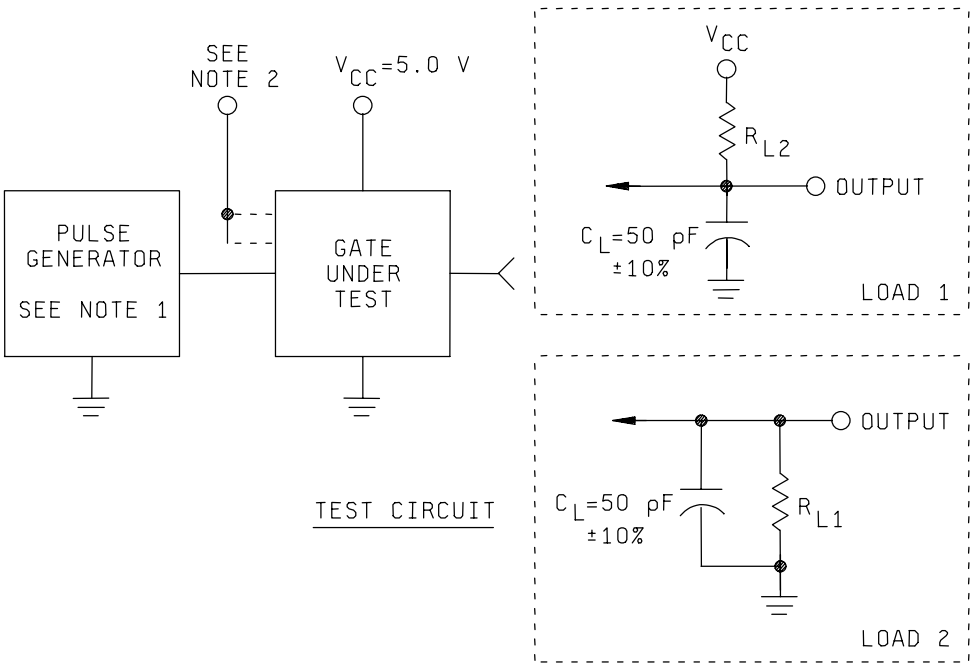

TEST CIRCUIT

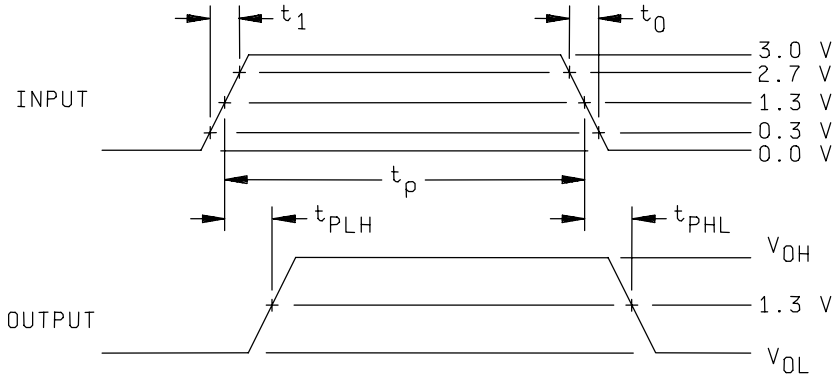

VOLTAGE WAVEFORMS

NOTES:

1. Input pulse characteristics: $t_1 = t_0 = 6 \pm 1.5$ ns; PRR ≤ 1.0 MHz; duty cycle = 50%.
2. Inputs not under test, for device types 04 and 06 are 2.7 V; for device type 08 is ground.
3. C_L = 50 pF ±10%, includes jig and probe capacitance.
4. R_{L1} = 499 Ω ±1% for device types 04, 06, 08, and 11; R_{L2} = 680 Ω ±5% for device type 12.
5. Voltage measurements are to be made with respect to network ground terminal.

FIGURE 3. Switching time test circuit and waveforms for device types 04, 06, 08, 11, and 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}		Min	Max	
1 Tc = 25°C	V_{OH}	3006	1	0.8 V	2.0 V	-1.0 mA				GND							4.5 V	1Y	2.4		V
		"	2	2.0 V	0.8 V	-1.0 mA				"							"	1Y	"		"
		"	3				0.8 V	2.0 V	-1.0 mA	"							"	2Y	"		"
		"	4				2.0 V	0.8 V	-1.0 mA	"							"	2Y	"		"
		"	5							"	-1.0 mA	0.8 V	2.0 V				"	3Y	"		"
		"	6							"	-1.0 mA	2.0 V	0.8 V				"	3Y	"		"
		"	7							"				-1.0 mA	0.8 V	2.0 V	"	4Y	"		"
		"	8							"				-1.0 mA	2.0 V	0.8 V	"	4Y	"		"
	V_{OL}	3007	9	2.0 V	2.0 V	12 mA				"							"	1Y		0.4	"
		"	10				2.0 V	2.0 V	12 mA	"							"	2Y		"	"
		"	11							"	12 mA	2.0 V	2.0 V				"	3Y		"	"
		"	12							"				12 mA	2.0 V	2.0 V	"	4Y		"	"
	V_{IC}		13	-18 mA						"							"	1A		-1.5	"
			14		-18 mA					"							"	1B		"	"
			15				-18 mA			"							"	2A		"	"
			16					-18 mA		"							"	2B		"	"
			17							"		-18 mA					"	3A		"	"
			18							"			-18 mA				"	3B		"	"
			19							"					-18 mA		"	4A		"	"
			20							"						-18 mA	"	4B		"	"
	I_{IL}	3009	21	0.4 V						"							5.5 V	1A	2/	2/	µA
		"	22		0.4 V					"							"	1B	"	"	"
		"	23				0.4 V			"							"	2A	"	"	"
		"	24					0.4 V		"							"	2B	"	"	"
		"	25							"		0.4 V					"	3A	"	"	"
		"	26							"			0.4 V				"	3B	"	"	"
		"	27							"					0.4 V		"	4A	"	"	"
		"	28							"						0.4 V	"	4B	"	"	"
	I_{IH1}	3010	29	2.7 V						"							"	1A		20	"
		"	30		2.7 V					"							"	1B		"	"
		"	31				2.7 V			"							"	2A		"	"
		"	32					2.7 V		"							"	2B		"	"
		"	33							"		2.7 V					"	3A		"	"
		"	34							"			2.7 V				"	3B		"	"
		"	35							"					2.7 V		"	4A		"	"
		"	36							"						2.7 V	"	4B		"	"
	I_{IH2}	"	37	7.0 V						"							"	1A		100	"
		"	38		7.0 V					"							"	1B		"	"
		"	39				7.0 V			"							"	2A		"	"
		"	40					7.0 V		"							"	2B		"	"
		"	41							"		7.0 V					"	3A		"	"
		"	42							"			7.0 V				"	3B		"	"
		"	43							"					7.0 V		"	4A		"	"
		"	44							"						7.0 V	"	4B		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}		Min	Max	
1 Tc = 25°C	I_O	3011 3/ 4/	45	GND	GND	2.25 V				GND							5.5 V	1Y	-20	-112	mA
		"	46				GND	GND	2.25 V	"							"	2Y	"	"	"
		"	47							"	2.25 V	GND	GND				"	3Y	"	"	"
		"	48							"				2.25 V	GND	GND	"	4Y	"	"	"
	I_{CCH}	3005	49	GND	GND		GND	GND		"		GND	GND		GND	GND	"	V_{CC}		1.6	"
	I_{CCL}	3005	50	4.5 V	4.5 V		4.5 V	4.5 V		"		4.5 V	4.5 V		4.5 V	4.5 V	"	V_{CC}		7.8	"
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				
9 Tc = 25°C	t_{PLH}	3003 Fig. 3	51	IN	2.7 V	OUT				GND							5.0 V	1A to 1Y	2	8	ns
		"	52	2.7 V	IN	OUT				"							"	1B to 1Y	"	"	"
		"	53				IN	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	54				2.7 V	IN	OUT	"							"	2B to 2Y	"	"	"
		"	55							"	OUT	IN	2.7 V				"	3A to 3Y	"	"	"
		"	56							"	OUT	2.7 V	IN				"	3B to 3Y	"	"	"
		"	57							"				OUT	IN	2.7 V	"	4A to 4Y	"	"	"
		"	58							"				OUT	2.7 V	IN	"	4B to 4Y	"	"	"
	t_{PHL}	"	59	IN	2.7 V	OUT				"							"	1A to 1Y	3	8	"
		"	60	2.7 V	IN	OUT				"							"	1B to 1Y	"	"	"
		"	61				IN	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	62				2.7 V	IN	OUT	"							"	2B to 2Y	"	"	"
		"	63							"	OUT	IN	2.7 V				"	3A to 3Y	"	"	"
		"	64							"	OUT	2.7 V	IN				"	3B to 3Y	"	"	"
		"	65							"				OUT	IN	2.7 V	"	4A to 4Y	"	"	"
		"	66							"				OUT	2.7 V	IN	"	4B to 4Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																	2	10	"
	t_{PHL}																		3	10	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

1/ Pins not referenced are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

3/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.

4/ I_O min/max limit for circuits B and C shall be: -30/ -110 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1Y	1A	1B	2Y	2A	2B	GND	3A	3B	3Y	4A	4B	4Y	V_{CC}		Min	Max	
1 Tc = 25°C	V_{OH}	3006	1	-10 mA	0.8 V	0.8 V				GND							4.5 V	1Y	2.4		V
		"	2				-1.0 mA	0.8 V	0.8 V	"							"	2Y	"		"
		"	3							"	0.8 V	0.8 V	-1.0 mA				"	3Y	"		"
		"	4							"				0.8 V	0.8 V	-1.0 mA	"	4Y	"		"
	V_{OL}	3007	5	12 mA	2.0 V	0.8 V				"							"	1Y		0.4	"
		"	6	12 mA	0.8 V	2.0 V				"							"	1Y		"	"
		"	7				12 mA	2.0 V	0.8 V	"							"	2Y		"	"
		"	8				12 mA	0.8 V	2.0 V	"							"	2Y		"	"
		"	9							"	2.0 V	0.8 V	12 mA				"	3Y		"	"
		"	10							"	0.8 V	2.0 V	12 mA				"	3Y		"	"
		"	11							"				2.0 V	0.8 V	12 mA	"	4Y		"	"
		"	12							"				0.8 V	2.0 V	12 mA	"	4Y		"	"
	V_{IC}		13		-18 mA					"							"	1A		-1.5	"
			14			-18 mA				"							"	1B		"	"
			15					-18 mA		"							"	2A		"	"
			16						-18 mA	"							"	2B		"	"
			17							"	-18 mA						"	3A		"	"
			18							"		-18 mA					"	3B		"	"
			19							"				-18 mA			"	4A		"	"
			20							"					-18 mA		"	4B		"	"
	I_{IL}	3009	21		0.4 V					"							5.5 V	1A	2/	2/	µA
		"	22			0.4 V				"							"	1B	"	"	"
		"	23					0.4 V		"							"	2A	"	"	"
		"	24						0.4 V	"							"	2B	"	"	"
		"	25							"	0.4 V						"	3A	"	"	"
		"	26							"		0.4 V					"	3B	"	"	"
		"	27							"				0.4 V			"	4A	"	"	"
		"	28							"					0.4 V		"	4B	"	"	"
	I_{IH1}	3010	29		2.7 V					"							"	1A		20	"
		"	30			2.7 V				"							"	1B		"	"
		"	31					2.7 V		"							"	2A		"	"
		"	32						2.7 V	"							"	2B		"	"
		"	33							"	2.7 V						"	3A		"	"
		"	34							"		2.7 V					"	3B		"	"
		"	35							"				2.7 V			"	4A		"	"
		"	36							"					2.7 V		"	4B		"	"
	I_{IH2}	"	37		7.0 V					"							"	1A		100	"
		"	38			7.0 V				"							"	1B		"	"
		"	39					7.0 V		"							"	2A		"	"
		"	40						7.0 V	"							"	2B		"	"
		"	41							"	7.0 V						"	3A		"	"
		"	42							"		7.0 V					"	3B		"	"
		"	43							"				7.0 V			"	4A		"	"
		"	44							"					7.0 V		"	4B		"	"
	I_O	3011	45	2.25 V	GND	GND				"							"	1Y	-20	-112	mA
		3/ 4/	46				2.25 V	GND	GND	"							"	2Y	"	"	"
		"	47							"	GND	GND	2.25 V				"	3Y	"	"	"
		"	48							"				GND	GND	2.25 V	"	4Y	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1Y	1A	1B	2Y	2A	2B	GND	3A	3B	3Y	4A	4B	4Y	V_{CC}		Min	Max	
1	I_{CCH}	3005	49		GND	GND		GND	GND	GND	GND	GND		GND	GND		5.5 V	V_{CC}		2.8	mA
Tc = 25°C	I_{CCL}	3005	50		4.5 V	4.5 V		4.5 V	4.5 V	GND	4.5 V	4.5 V		4.5 V	4.5 V		5.5 V	V_{CC}		9.0	mA
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				
9	t_{PLH}	3003	51	OUT	IN	GND				GND							5.0 V	1A to 1Y	2	8	ns
Tc = 25°C		Fig. 3	52	OUT	GND	IN				"							"	1B to 1Y	"	"	"
		"	53				OUT	IN	GND	"							"	2A to 2Y	"	"	"
		"	54				OUT	GND	IN	"							"	2B to 2Y	"	"	"
		"	55							"	IN	GND	OUT				"	3A to 3Y	"	"	"
		"	56							"	GND	IN	OUT				"	3B to 3Y	"	"	"
		"	57							"				IN	GND	OUT	"	4A to 4Y	"	"	"
		"	58							"				GND	IN	OUT	"	4B to 4Y	"	"	"
	t_{PHL}	"	59	OUT	IN	GND				"							"	1A to 1Y	3	8	"
		"	60	OUT	GND	IN				"							"	1B to 1Y	"	"	"
		"	61				OUT	IN	GND	"							"	2A to 2Y	"	"	"
		"	62				OUT	GND	IN	"							"	2B to 2Y	"	"	"
		"	63							"	IN	GND	OUT				"	3A to 3Y	"	"	"
		"	64							"	GND	IN	OUT				"	3B to 3Y	"	"	"
		"	65							"				IN	GND	OUT	"	4A to 4Y	"	"	"
		"	66							"				GND	IN	OUT	"	4B to 4Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																	2	10	"
	t_{PHL}																		3	10	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

1/ For case 2, pins not referenced are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

3/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.

4/ I_O min/max limit for circuits B and C shall be: -30/-110 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}		Min	Max	
1 Tc = 25°C	V_{OL}	3006	1	2.0 V	2.0 V	12 mA				GND							4.5 V	1Y		0.4	V
		"	2				2.0 V	2.0 V	12 mA	"							"	2Y		"	"
		"	3							"	12 mA	2.0 V	2.0 V				"	3Y		"	"
		"	4							"				12 mA	2.0 V	2.0 V	"	4Y		"	"
	V_{IC}		5	-18 mA						"							"	1A		-1.5	"
			6		-18 mA					"							"	1B		"	"
			7				-18 mA			"							"	2A		"	"
			8					-18 mA		"							"	2B		"	"
			9							"		-18 mA					"	3A		"	"
			10							"			-18 mA				"	3B		"	"
			11							"					-18 mA		"	4A		"	"
			12							"						-18 mA	"	4B		"	"
	I_{IL}	3009	13	0.4 V						"							5.5 V	1A	2/	2/	µA
		"	14		0.4 V					"							"	1B	"	"	"
		"	15				0.4 V			"							"	2A	"	"	"
		"	16					0.4 V		"							"	2B	"	"	"
		"	17							"		0.4 V					"	3A	"	"	"
		"	18							"			0.4 V				"	3B	"	"	"
		"	19							"					0.4 V		"	4A	"	"	"
		"	20							"						0.4 V	"	4B	"	"	"
	I_{IH1}	3010	21	2.7 V						"							"	1A		20	
		"	22		2.7 V					"							"	1B		"	"
		"	23				2.7 V			"							"	2A		"	"
		"	24					2.7 V		"							"	2B		"	"
		"	25							"		2.7 V					"	3A		"	"
		"	26							"			2.7 V				"	3B		"	"
		"	27							"					2.7 V		"	4A		"	"
		"	28							"						2.7 V	"	4B		"	"
	I_{IH2}	"	29	7.0 V						"							"	1A		100	"
		"	30		7.0 V					"							"	1B		"	"
		"	31				7.0 V			"							"	2A		"	"
		"	32					7.0 V		"							"	2B		"	"
		"	33							"		7.0 V					"	3A		"	"
		"	34							"			7.0 V				"	3B		"	"
		"	35							"					7.0 V		"	4A		"	"
		"	36							"						7.0 V	"	4B		"	"
	I_{CCX}	"	37	0.8 V	5.0 V	5.5 V				"							4.5 V	1A		100	"
		"	38	5.0 V	0.8 V	5.5 V				"							"	1B		"	"
		"	39				0.8 V	5.0 V	5.5 V	"							"	2A		"	"
		"	40				5.0 V	0.8 V	5.5 V	"							"	2B		"	"
		"	41							"	5.5 V	0.8 V	5.0 V				"	3A		"	"
		"	42							"	5.5 V	5.0 V	0.8 V				"	3B		"	"
		"	43							"				5.5 V	0.8 V	5.0 V	"	4A		"	"
		"	44							"				5.5 V	5.0 V	0.8 V	"	4B		"	"
	I_{CCH}	3005	45	GND	GND		GND	GND		"		GND	GND		GND	GND	5.5 V	V_{CC}		1.6	mA
	I_{CCL}	3005	46	4.5 V	4.5 V		4.5 V	4.5 V		"		4.5 V	4.5 V		4.5 V	4.5 V	5.5 V	V_{CC}		7.8	mA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}		Min	Max	
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				
9	t_{PLH}	3003	47	IN	2.7 V	OUT				GND							5.0 V	1A to 1Y	10	33	ns
Tc = 25°C		Fig. 3	48	2.7 V	IN	OUT				"							"	1B to 1Y	"	"	"
		"	49				IN	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	50				2.7 V	IN	OUT	"							"	2B to 2Y	"	"	"
		"	51							"	OUT	IN	2.7 V				"	3A to 3Y	"	"	"
		"	52							"	OUT	2.7 V	IN				"	3B to 3Y	"	"	"
		"	53							"				OUT	IN	2.7 V	"	4A to 4Y	"	"	"
		"	54							"				OUT	2.7 V	IN	"	4B to 4Y	"	"	"
	t_{PHL}	"	55	IN	2.7 V	OUT				"							"	1A to 1Y	7	18	"
		"	56	2.7 V	IN	OUT				"							"	1B to 1Y	"	"	"
		"	57				IN	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	58				2.7 V	IN	OUT	"							"	2B to 2Y	"	"	"
		"	59							"	OUT	IN	2.7 V				"	3A to 3Y	"	"	"
		"	60							"	OUT	2.7 V	IN				"	3B to 3Y	"	"	"
		"	61							"				OUT	IN	2.7 V	"	4A to 4Y	"	"	"
		"	62							"				OUT	2.7 V	IN	"	4B to 4Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																	10	40	"
	t_{PHL}																		7	21	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

1/ For case 2, pins not referenced are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}		Min	Max	
1 Tc = 25°C	V_{OH}	3006	1	2.0 V	2.0 V	-1.0 mA				GND							4.5 V	1Y	2.4		V
		"	2				2.0 V	2.0 V	-1.0 mA	"							"	2Y	"		"
		"	3							"	-1.0 mA	2.0 V	2.0 V				"	3Y	"		"
		"	4							"				-1.0 mA	2.0 V	2.0 V	"	4Y	"		"
	V_{OL}	3007	5	0.8 V	5.5 V	12 mA				"							"	1Y		0.4	"
		"	6	5.5 V	0.8 V	12 mA				"							"	1Y		"	"
		"	7				0.8 V	5.5 V	12 mA	"							"	2Y		"	"
		"	8				5.5 V	0.8 V	12 mA	"							"	2Y		"	"
		"	9							"	12 mA	0.8 V	5.5 V				"	3Y		"	"
		"	10							"	12 mA	5.5 V	0.8 V				"	3Y		"	"
		"	11							"				12 mA	0.8 V	5.5 V	"	4Y		"	"
		"	12							"				12 mA	5.5 V	0.8 V	"	4Y		"	"
	V_{IC}		13	-18 mA						"							"	1A		-1.5	"
			14		-18 mA					"							"	1B		"	"
			15				-18 mA			"							"	2A		"	"
			16					-18 mA		"							"	2B		"	"
			17							"		-18 mA					"	3A		"	"
			18							"			-18 mA				"	3B		"	"
			19							"					-18 mA		"	4A		"	"
			20							"						-18 mA	"	4B		"	"
	I_{IL}	3009	21	0.4 V						"							5.5 V	1A	2/	2/	µA
		"	22		0.4 V					"							"	1B	"	"	"
		"	23				0.4 V			"							"	2A	"	"	"
		"	24					0.4 V		"							"	2B	"	"	"
		"	25							"		0.4 V					"	3A	"	"	"
		"	26							"			0.4 V				"	3B	"	"	"
		"	27							"					0.4 V		"	4A	"	"	"
		"	28							"						0.4 V	"	4B	"	"	"
	I_{IH1}	3010	29	2.7 V						"							"	1A		20	"
		"	30		2.7 V					"							"	1B		"	"
		"	31				2.7 V			"							"	2A		"	"
		"	32					2.7 V		"							"	2B		"	"
		"	33							"		2.7 V					"	3A		"	"
		"	34							"			2.7 V				"	3B		"	"
		"	35							"					2.7 V		"	4A		"	"
		"	36							"						2.7 V	"	4B		"	"
	I_{IH2}	"	37	7.0 V						"							"	1A		100	"
		"	38		7.0 V					"							"	1B		"	"
		"	39				7.0 V			"							"	2A		"	"
		"	40					7.0 V		"							"	2B		"	"
		"	41							"		7.0 V					"	3A		"	"
		"	42							"			7.0 V				"	3B		"	"
		"	43							"					7.0 V		"	4A		"	"
		"	44							"						7.0 V	"	4B		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}		Min	Max	
1 Tc = 25°C	I_O	3011 3/ 4/	45	5.5 V	5.5 V	2.25 V				GND							5.5 V	1Y	-30	-112	mA
		"	46				5.5 V	5.5 V	2.25 V	"							"	2Y	"	"	"
		"	47							"	2.25 V	5.5 V	5.5 V				"	3Y	"	"	"
		"	48							"				2.25 V	5.5 V	5.5 V	"	4Y	"	"	"
	I_{CCH}	3005	49	4.5 V	4.5 V		4.5 V	4.5 V		"		4.5 V	4.5 V		4.5 V	4.5 V	"	V_{CC}		3.0	"
	I_{CCL}	3005	50	GND	GND		GND	GND		"		GND	GND		GND	GND	"	V_{CC}		9.3	"
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				
9 Tc = 25°C	t_{PLH}	3003 Fig. 3	51	IN	2.7 V	OUT				GND							5.0 V	1A to 1Y	2	9	ns
		"	52	2.7 V	IN	OUT				"							"	1B to 1Y	"	"	"
		"	53				IN	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	54				2.7 V	IN	OUT	"							"	2B to 2Y	"	"	"
		"	55							"	OUT	IN	2.7 V				"	3A to 3Y	"	"	"
		"	56							"	OUT	2.7 V	IN				"	3B to 3Y	"	"	"
		"	57							"				OUT	IN	2.7 V	"	4A to 4Y	"	"	"
		"	58							"				OUT	2.7 V	IN	"	4B to 4Y	"	"	"
	t_{PHL}	"	59	IN	2.7 V	OUT				"							"	1A to 1Y	3	9	"
		"	60	2.7 V	IN	OUT				"							"	1B to 1Y	"	"	"
		"	61				IN	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	62				2.7 V	IN	OUT	"							"	2B to 2Y	"	"	"
		"	63							"	OUT	IN	2.7 V				"	3A to 3Y	"	"	"
		"	64							"	OUT	2.7 V	IN				"	3B to 3Y	"	"	"
		"	65							"				OUT	IN	2.7 V	"	4A to 4Y	"	"	"
		"	66							"				OUT	2.7 V	IN	"	4B to 4Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																	2	11	"
	t_{PHL}																		3	11	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

1/ Pins not referenced are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

3/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.

4/ I_O min/max limit for circuits B and C shall be: -30/ -110 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	2A	2B	2C	2Y	GND	3Y	3A	3B	3C	1Y	1C	V_{CC}		Min	Max	
1 Tc = 25°C	V_{OH}	3006	1	0.8 V	2.0 V					GND					-1.0 mA	2.0 V	4.5 V	1Y	2.4		V
		"	2	2.0 V	0.8 V					"					-1.0 mA	2.0 V	"	1Y	"		"
		"	3							"					-1.0 mA	0.8 V	"	1Y	"		"
		"	4			0.8 V	2.0 V	2.0 V	-1.0 mA	"							"	2Y	"		"
		"	5			2.0 V	0.8 V	2.0 V	-1.0 mA	"							"	2Y	"		"
		"	6			2.0 V	2.0 V	0.8 V	-1.0 mA	"							"	2Y	"		"
		"	7							"	-1.0 mA	0.8 V	2.0 V	2.0 V			"	3Y	"		"
		"	8							"	-1.0 mA	2.0 V	0.8 V	2.0 V			"	3Y	"		"
		"	9							"	-1.0 mA	2.0 V	2.0 V	0.8 V			"	3Y	"		"
	V_{OL}	3007	10	2.0 V	2.0 V					"					12 mA	2.0 V	"	1Y		0.4	"
		"	11			2.0 V	2.0 V	2.0 V	12 mA	"							"	2Y		"	"
		"	12							"	12 mA	2.0 V	2.0 V	2.0 V			"	3Y		"	"
	V_{IC}		13	-18 mA						"							"	1A		-1.5	"
			14		-18 mA					"							"	1B		"	"
			15							"						-18 mA	"	1C		"	"
			16			-18 mA				"							"	2A		"	"
			17				-18 mA			"							"	2B		"	"
			18					-18 mA		"							"	2C		"	"
			19							"		-18 mA					"	3A		"	"
			20							"			-18 mA				"	3B		"	"
			21							"				-18 mA			"	3C		"	"
	I_{IL}	3009	22	0.4 V						"							5.5 V	1A	2/	2/	µA
		"	23		0.4 V					"							"	1B	"	"	"
		"	24							"						0.4 V	"	1C	"	"	"
		"	25			0.4 V				"							"	2A	"	"	"
		"	26				0.4 V			"							"	2B	"	"	"
		"	27					0.4 V		"							"	2C	"	"	"
		"	28							"		0.4 V					"	3A	"	"	"
		"	29							"			0.4 V				"	3B	"	"	"
		"	30							"				0.4 V			"	3C	"	"	"
	I_{IH1}	3010	31	2.7 V						"							"	1A		20	"
		"	32		2.7 V					"							"	1B		"	"
		"	33							"						2.7 V	"	1C		"	"
		"	34			2.7 V				"							"	2A		"	"
		"	35				2.7 V			"							"	2B		"	"
		"	36					2.7 V		"							"	2C		"	"
		"	37							"		2.7 V					"	3A		"	"
		"	38							"			2.7 V				"	3B		"	"
		"	39							"				2.7 V			"	3C		"	"
	I_{IH2}	"	40	7.0 V						"							"	1A		100	"
		"	41		7.0 V					"							"	1B		"	"
		"	42							"						7.0 V	"	1C		"	"
		"	43			7.0 V				"							"	2A		"	"
		"	44				7.0 V			"							"	2B		"	"
		"	45					7.0 V		"							"	2C		"	"
		"	46							"		7.0 V					"	3A		"	"
		"	47							"			7.0 V				"	3B		"	"
		"	48							"				7.0 V			"	3C		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	2A	2B	2C	2Y	GND	3Y	3A	3B	3C	1Y	1C	V_{CC}		Min	Max	
1 Tc = 25°C	I_O	3011 3/ 4/	49	4.5 V	4.5 V					GND					2.25 V	4.5 V	5.5 V	1Y	-30	-112	mA
		"	50			4.5 V	4.5 V	4.5 V	2.25 V	"							"	2Y	"	"	"
		"	51							"	2.25 V	4.5 V	4.5 V	4.5 V			"	3Y	"	"	"
	I_{CCH}	3005	52	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V		"		4.5 V	4.5 V	4.5 V		4.5 V	"	V_{CC}		1.2	"
	I_{CCL}	3005	53	GND	GND	GND	GND	GND		"		GND	GND	GND		GND	"	V_{CC}		6.0	"
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				
9 Tc = 25°C	t_{PLH}	3003 Fig. 3	54	IN	2.7 V					GND					OUT	2.7 V	5.0 V	1A to 1Y	2	8	ns
			55	2.7 V	IN					"					OUT	2.7 V	"	1B to 1Y	"	"	"
		"	56	2.7 V	2.7 V					"					OUT	IN	"	1C to 1Y	"	"	"
		"	57			IN	2.7 V	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	58			2.7 V	IN	2.7 V	OUT	"							"	2B to 2Y	"	"	"
		"	59			2.7 V	2.7 V	IN	OUT	"							"	2C to 2Y	"	"	"
		"	60							"	OUT	IN	2.7 V	2.7 V			"	3A to 3Y	"	"	"
		"	61							"	OUT	2.7 V	IN	2.7 V			"	3B to 3Y	"	"	"
		"	62							"	OUT	2.7 V	2.7 V	IN			"	3C to 3Y	"	"	"
	t_{PHL}	"	63	IN	2.7 V					"					OUT	2.7 V	"	1A to 1Y	3	8	"
		"	64	2.7 V	IN					"					OUT	2.7 V	"	1B to 1Y	"	"	"
		"	65	2.7 V	2.7 V					"					OUT	IN	"	1C to 1Y	"	"	"
		"	66			IN	2.7 V	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	67			2.7 V	IN	2.7 V	OUT	"							"	2B to 2Y	"	"	"
		"	68			2.7 V	2.7 V	IN	OUT	"							"	2C to 2Y	"	"	"
		"	69							"	OUT	IN	2.7 V	2.7 V			"	3A to 3Y	"	"	"
		"	70							"	OUT	2.7 V	IN	2.7 V			"	3B to 3Y	"	"	"
		"	71							"	OUT	2.7 V	2.7 V	IN			"	3C to 3Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																	2	10	"
	t_{PHL}																		3	10	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

1/ Pins not referenced are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

3/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.

4/ I_O min/max limit for circuits B and C shall be: -30/ -110 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	2A	2B	2C	2Y	GND	3Y	3A	3B	3C	1Y	1C	V_{CC}		Min	Max	
1 Tc = 25°C	V_{OH}	3006	1	2.0 V	2.0 V					GND					-1.0 mA	2.0 V	4.5 V	1Y	2.4		V
		"	2			2.0 V	2.0 V	2.0 V	-1.0 mA	"							"	2Y	"		"
		"	3							"	-1.0 mA	2.0 V	2.0 V	2.0 V			"	3Y	"		"
	V_{OL}	3007	4	0.8 V	2.0 V					"					12 mA	2.0 V	"	1Y		0.4	"
		"	5	2.0 V	0.8 V					"					12 mA	2.0 V	"	1Y		"	"
		"	6	2.0 V	2.0 V					"					12 mA	0.8 V	"	1Y		"	"
		"	7			0.8 V	2.0 V	2.0 V	12 mA	"							"	2Y		"	"
		"	8			2.0 V	0.8 V	2.0 V	12 mA	"							"	2Y		"	"
		"	9			2.0 V	2.0 V	0.8 V	12 mA	"							"	2Y		"	"
		"	10							"	12 mA	0.8 V	2.0 V	2.0 V			"	3Y		"	"
		"	11							"	12 mA	2.0 V	0.8 V	2.0 V			"	3Y		"	"
		"	12							"	12 mA	2.0 V	2.0 V	0.8 V			"	3Y		"	"
	V_{IC}		13	-18 mA						"							"	1A		-1.5	"
			14		-18 mA					"							"	1B		"	"
			15							"						-18 mA	"	1C		"	"
			16			-18 mA				"							"	2A		"	"
			17				-18 mA			"							"	2B		"	"
			18					-18 mA		"							"	2C		"	"
			19							"		-18 mA					"	3A		"	"
			20							"			-18 mA				"	3B		"	"
			21							"				-18 mA			"	3C		"	"
	I_{IL}	3009	22	0.4 V						"							5.5 V	1A	2/	2/	µA
		"	23		0.4 V					"							"	1B	"	"	"
		"	24							"						0.4 V	"	1C	"	"	"
		"	25			0.4 V				"							"	2A	"	"	"
		"	26				0.4 V			"							"	2B	"	"	"
		"	27					0.4 V		"							"	2C	"	"	"
		"	28							"		0.4 V					"	3A	"	"	"
		"	29							"			0.4 V				"	3B	"	"	"
		"	30							"				0.4 V			"	3C	"	"	"
	I_{IH1}	3010	31	2.7 V						"							"	1A		20	"
		"	32		2.7 V					"							"	1B		"	"
		"	33							"						2.7 V	"	1C		"	"
		"	34			2.7 V				"							"	2A		"	"
		"	35				2.7 V			"							"	2B		"	"
		"	36					2.7 V		"							"	2C		"	"
		"	37							"		2.7 V					"	3A		"	"
		"	38							"			2.7 V				"	3B		"	"
		"	39							"				2.7 V			"	3C		"	"
	I_{IH2}	"	40	7.0 V						"							"	1A		100	"
		"	41		7.0 V					"							"	1B		"	"
		"	42							"						7.0 V	"	1C		"	"
		"	43			7.0 V				"							"	2A		"	"
		"	44				7.0 V			"							"	2B		"	"
		"	45					7.0 V		"							"	2C		"	"
		"	46							"		7.0 V					"	3A		"	"
		"	47							"			7.0 V				"	3B		"	"
		"	48							"				7.0 V			"	3C		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	2A	2B	2C	2Y	GND	3Y	3A	3B	3C	1Y	1C	V_{CC}		Min	Max	
1 Tc = 25°C	I_O	3011 3/ 4/	49	4.5 V	4.5 V					GND					2.25 V	4.5 V	5.5 V	1Y	-30	-112	mA
		"	50			4.5 V	4.5 V	4.5 V	2.25 V	"							"	2Y	"	"	"
		"	51							"	2.25 V	4.5 V	4.5 V	4.5 V			"	3Y	"	"	"
	I_{CCH}	3005	52	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V		"		4.5 V	4.5 V	4.5 V		4.5 V	"	V_{CC}		2.3	"
	I_{CCL}	3005	53	GND	GND	GND	GND	GND		"		GND	GND	GND		GND	"	V_{CC}		7.0	"
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				
9 Tc = 25°C	t_{PLH}	3003 Fig. 3	54	IN	2.7 V					GND					OUT	2.7 V	5.0 V	1A to 1Y	2	10	ns
			55	2.7 V	IN					"					OUT	2.7 V	"	1B to 1Y	"	"	"
		"	56	2.7 V	2.7 V					"					OUT	IN	"	1C to 1Y	"	"	"
		"	57			IN	2.7 V	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	58			2.7 V	IN	2.7 V	OUT	"							"	2B to 2Y	"	"	"
		"	59			2.7 V	2.7 V	IN	OUT	"							"	2C to 2Y	"	"	"
		"	60							"	OUT	IN	2.7 V	2.7 V			"	3A to 3Y	"	"	"
		"	61							"	OUT	2.7 V	IN	2.7 V			"	3B to 3Y	"	"	"
		"	62							"	OUT	2.7 V	2.7 V	IN			"	3C to 3Y	"	"	"
	t_{PHL}	"	63	IN	2.7 V					"					OUT	2.7 V	"	1A to 1Y	3	9	"
		"	64	2.7 V	IN					"					OUT	2.7 V	"	1B to 1Y	"	"	"
		"	65	2.7 V	2.7 V					"					OUT	IN	"	1C to 1Y	"	"	"
		"	66			IN	2.7 V	2.7 V	OUT	"							"	2A to 2Y	"	"	"
		"	67			2.7 V	IN	2.7 V	OUT	"							"	2B to 2Y	"	"	"
		"	68			2.7 V	2.7 V	IN	OUT	"							"	2C to 2Y	"	"	"
		"	69							"	OUT	IN	2.7 V	2.7 V			"	3A to 3Y	"	"	"
		"	70							"	OUT	2.7 V	IN	2.7 V			"	3B to 3Y	"	"	"
		"	71							"	OUT	2.7 V	2.7 V	IN			"	3C to 3Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																	2	12	"
	t_{PHL}																		3	11	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

1/ Pins not referenced are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

3/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.

4/ I_O min/max limit for circuits B and C shall be: -30/ -110 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	1/	6	8	9	10	12	13	14	1/	18	19	20				
			Test no.	1A	1B	NC	1C	1D	1Y	GND	2Y	2A	2B	NC	2C	2D	V_{CC}		Min	Max	
1 Tc = 25°C	V_{OH}	3006	1	0.8 V	2.0 V		2.0 V	2.0 V	-1.0 mA	GND							4.5 V	1Y	2.4		V
		"	2	2.0 V	0.8 V		2.0 V	2.0 V	-1.0 mA	"							"	1Y	"		"
		"	3	2.0 V	2.0 V		0.8 V	2.0 V	-1.0 mA	"							"	1Y	"		"
		"	4	2.0 V	2.0 V		2.0 V	0.8 V	-1.0 mA	"							"	1Y	"		"
		"	5							"	-1.0 mA	0.8 V	2.0 V		2.0 V	2.0 V	"	2Y	"		"
		"	6							"	-1.0 mA	2.0 V	0.8 V		2.0 V	2.0 V	"	2Y	"		"
		"	7							"	-1.0 mA	2.0 V	2.0 V		0.8 V	2.0 V	"	2Y	"		"
		"	8							"	-1.0 mA	2.0 V	2.0 V		2.0 V	0.8 V	"	2Y	"		"
	V_{OL}	3007	9	2.0 V	2.0 V		2.0 V	2.0 V	12 mA	"							"	1Y		0.4	"
		3007	10							"	12 mA	2.0 V	2.0 V		2.0 V	2.0 V	"	2Y		0.4	"
	V_{IC}		11	-18 mA						"							"	1A		-1.5	"
			12		-18 mA					"							"	1B		"	"
			13				-18 mA			"							"	1C		"	"
			14					-18 mA		"							"	1D		"	"
			15							"		-18 mA					"	2A		"	"
			16							"			-18 mA				"	2B		"	"
			17							"					-18 mA		"	2C		"	"
			18							"						-18 mA	"	2D		"	"
	I_{IL}	3009	19	0.4 V						"							5.5 V	1A	2/	2/	µA
		"	20		0.4 V					"							"	1B	"	"	"
		"	21				0.4 V			"							"	1C	"	"	"
		"	22					0.4 V		"							"	1D	"	"	"
		"	23							"		0.4 V					"	2A	"	"	"
		"	24							"			0.4 V				"	2B	"	"	"
		"	25							"					0.4 V		"	2C	"	"	"
		"	26							"						0.4 V	"	2D	"	"	"
	I_{IH1}	3010	27	2.7 V						"							"	1A		20	"
		"	28		2.7 V					"							"	1B		"	"
		"	29				2.7 V			"							"	1C		"	"
		"	30					2.7 V		"							"	1D		"	"
		"	31							"		2.7 V					"	2A		"	"
		"	32							"			2.7 V				"	2B		"	"
		"	33							"					2.7 V		"	2C		"	"
		"	34							"						2.7 V	"	2D		"	"
	I_{IH2}	"	35	7.0 V						"							"	1A		100	"
		"	36		7.0 V					"							"	1B		"	"
		"	37				7.0 V			"							"	1C		"	"
		"	38					7.0 V		"							"	1D		"	"
		"	39							"		7.0 V					"	2A		"	"
		"	40							"			7.0 V				"	2B		"	"
		"	41							"					7.0 V		"	2C		"	"
		"	42							"						7.0 V	"	2D		"	"
	I_O	3011	43	GND	GND		GND	GND	2.25 V	"							"	1Y	-20	-112	mA
		3/ 4/	44							"	2.25 V	GND	GND		GND	GND	"	2Y	-20	-112	"
	I_{CCH}	3005	45	GND	GND		GND	GND		"		GND	GND		GND	GND	"	V_{CC}		0.8	"
	I_{CCL}	3005	46	4.5 V	4.5 V		4.5 V	4.5 V		"		4.5 V	4.5 V		4.5 V	4.5 V	"	V_{CC}		3.9	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	1/	6	8	9	10	12	13	14	1/	18	19	20				
			Test no.	1A	1B	NC	1C	1D	1Y	GND	2Y	2A	2B	NC	2C	2D	V_{CC}		Min	Max	
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				
9 Tc = 25°C	t_{PLH}	3003 Fig. 3	47	IN	2.7 V		2.7 V	2.7 V	OUT	GND							5.0 V	1A to 1Y	2	8	ns
		"	48	2.7 V	IN		2.7 V	2.7 V	OUT	"							"	1B to 1Y	"	"	"
		"	49	2.7 V	2.7 V		IN	2.7 V	OUT	"							"	1C to 1Y	"	"	"
		"	50	2.7 V	2.7 V		2.7 V	IN	OUT	"							"	1D to 1Y	"	"	"
		"	51							"	OUT	IN	2.7 V		2.7 V	2.7 V	"	2A to 2Y	"	"	"
		"	52							"	OUT	2.7 V	IN		2.7 V	2.7 V	"	2B to 2Y	"	"	"
		"	53							"	OUT	2.7 V	2.7 V		IN	2.7 V	"	2C to 2Y	"	"	"
		"	54							"	OUT	2.7 V	2.7 V		2.7 V	IN	"	2D to 2Y	"	"	"
	t_{PHL}	"	55	IN	2.7 V		2.7 V	2.7 V	OUT	"							"	1A to 1Y	3	8	"
		"	56	2.7 V	IN		2.7 V	2.7 V	OUT	"							"	1B to 1Y	"	"	"
		"	57	2.7 V	2.7 V		IN	2.7 V	OUT	"							"	1C to 1Y	"	"	"
		"	58	2.7 V	2.7 V		2.7 V	IN	OUT	"							"	1D to 1Y	"	"	"
		"	59							"	OUT	IN	2.7 V		2.7 V	2.7 V	"	2A to 2Y	"	"	"
		"	60							"	OUT	2.7 V	IN		2.7 V	2.7 V	"	2B to 2Y	"	"	"
		"	61							"	OUT	2.7 V	2.7 V		IN	2.7 V	"	2C to 2Y	"	"	"
		"	62							"	OUT	2.7 V	2.7 V		2.7 V	IN	"	2D to 2Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																	2	10	"
	t_{PHL}																		3	10	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

1/ Pins not referenced are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

3/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.

4/ I_O min/max limit for circuits B and C shall be: -30/ -110 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}		Min	Max	
1 Tc = 25°C	V_{OH}	3006	1	2.0 V	0.8 V	-1.0 mA				GND							4.5 V	1Y	2.4		V
		"	2	0.8 V	2.0 V	-1.0 mA				"							"	1Y	"		"
		"	3				2.0 V	0.8 V	-1.0 mA	"							"	2Y	"		"
		"	4				0.8 V	2.0 V	-1.0 mA	"							"	2Y	"		"
		"	5							"	-1.0 mA	2.0 V	0.8 V				"	3Y	"		"
		"	6							"	-1.0 mA	0.8 V	2.0 V				"	3Y	"		"
		"	7							"				-1.0 mA	2.0 V	0.8 V	"	4Y	"		"
		"	8							"				-1.0 mA	0.8 V	2.0 V	"	4Y	"		"
	V_{OL}	3007	9	0.8 V	0.8 V	12 mA				"							"	1Y		0.4	"
		"	10				0.8 V	0.8 V	12 mA	"							"	2Y		"	"
		"	11							"	12 mA	0.8 V	0.8 V				"	3Y		"	"
		"	12							"				12 mA	0.8 V	0.8 V	"	4Y		"	"
	V_{IC}		13	-18 mA						"							"	1A		-1.5	"
			14		-18 mA					"							"	1B		"	"
			15				-18 mA			"							"	2A		"	"
			16					-18 mA		"							"	2B		"	"
			17							"		-18 mA					"	3A		"	"
			18							"			-18 mA				"	3B		"	"
			19							"					-18 mA		"	4A		"	"
			20							"						-18 mA	"	4B		"	"
	I_{IL}	3009	21	0.4 V						"							5.5 V	1A	2/	2/	µA
		"	22		0.4 V					"							"	1B	"	"	"
		"	23				0.4 V			"							"	2A	"	"	"
		"	24					0.4 V		"							"	2B	"	"	"
		"	25							"		0.4 V					"	3A	"	"	"
		"	26							"			0.4 V				"	3B	"	"	"
		"	27							"					0.4 V		"	4A	"	"	"
		"	28							"						0.4 V	"	4B	"	"	"
	I_{IH1}	3010	29	2.7 V						"							"	1A		20	"
		"	30		2.7 V					"							"	1B		"	"
		"	31				2.7 V			"							"	2A		"	"
		"	32					2.7 V		"							"	2B		"	"
		"	33							"		2.7 V					"	3A		"	"
		"	34							"			2.7 V				"	3B		"	"
		"	35							"					2.7 V		"	4A		"	"
		"	36							"						2.7 V	"	4B		"	"
	I_{IH2}	"	37	7.0 V						"							"	1A		100	"
		"	38		7.0 V					"							"	1B		"	"
		"	39				7.0 V			"							"	2A		"	"
		"	40					7.0 V		"							"	2B		"	"
		"	41							"		7.0 V					"	3A		"	"
		"	42							"			7.0 V				"	3B		"	"
		"	43							"					7.0 V		"	4A		"	"
		"	44							"						7.0 V	"	4B		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2	2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}		Min	Max	
1	I_O	3011	45	4.5 V	4.5 V	2.25 V				GND							5.5 V	1Y	-30	-112	mA
Tc = 25°C		3/ 4/	46				4.5 V	4.5 V	2.25 V	"							"	2Y	"	"	"
		"	47							"	2.25 V	4.5 V	4.5 V				"	3Y	"	"	"
		"	48							"				2.25 V	4.5 V	4.5 V	"	4Y	"	"	"
	I_{CCH}	3005	49	4.5 V	4.5 V		4.5 V	4.5 V		"		4.5 V	4.5 V		4.5 V	4.5 V	"	V_{CC}		5.0	"
	I_{CCL}	3005	50	GND	GND		GND	GND		"		GND	GND		GND	GND	"	V_{CC}		10.6	"
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				
9	t_{PLH}	3003	51	IN	GND	OUT				GND							5.0 V	1A to 1Y	2	10	ns
Tc = 25°C		Fig. 3	52	GND	IN	OUT				"							"	1B to 1Y	"	"	"
		"	53				IN	GND	OUT	"							"	2A to 2Y	"	"	"
		"	54				GND	IN	OUT	"							"	2B to 2Y	"	"	"
		"	55							"	OUT	IN	GND				"	3A to 3Y	"	"	"
		"	56							"	OUT	GND	IN				"	3B to 3Y	"	"	"
		"	57							"				OUT	IN	GND	"	4A to 4Y	"	"	"
		"	58							"				OUT	GND	IN	"	4B to 4Y	"	"	"
	t_{PHL}	"	59	IN	GND	OUT				"							"	1A to 1Y	2	13	"
		"	60	GND	IN	OUT				"							"	1B to 1Y	"	"	"
		"	61				IN	GND	OUT	"							"	2A to 2Y	"	"	"
		"	62				GND	IN	OUT	"							"	2B to 2Y	"	"	"
		"	63							"	OUT	IN	GND				"	3A to 3Y	"	"	"
		"	64							"	OUT	GND	IN				"	3B to 3Y	"	"	"
		"	65							"				OUT	IN	GND	"	4A to 4Y	"	"	"
		"	66							"				OUT	GND	IN	"	4B to 4Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																	2	12	"
	t_{PHL}																		2	15	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

1/ Pins not referenced are N/C.

2/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in μA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

3/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.

4/ I_O min/max limit for circuits B and C shall be: -30/ -110 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09, 10.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D		1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2		2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.		1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	V_{CC}		Min	Max	
			Type 09	10																		
1 Tc = 25°C	V_{OH} 2/	3006	1		0.8 V	-1 mA					GND							4.5 V	1Y	2.4		V
	"	"	2				0.8 V	-1 mA			"							"	2Y	"		"
	"	"	3						0.8 V	-1 mA	"							"	3Y	"		"
	"	"	4								"	-1 mA	0.8 V					"	4Y	"		"
	"	"	5								"			-1 mA	0.8 V			"	5Y	"		"
	"	"	6								"					-1 mA	0.8 V	"	6Y	"		"
	V_{OL}	3007	7	1	2.0 V	12 mA					"							"	1Y		0.4	"
	"	"	8	2			2.0 V	12 mA			"							"	2Y		"	"
	"	"	9	3					2.0 V	12 mA	"							"	3Y		"	"
	"	"	10	4							"	12 mA	2.0 V					"	4Y		"	"
	"	"	11	5							"			12 mA	2.0 V			"	5Y		"	"
	"	"	12	6							"					12 mA	2.0 V	"	6Y		"	"
	V_{IC}		13	7	-18 mA						"							"	1A		-1.5	"
			14	8			-18 mA				"							"	2A		"	"
			15	9					-18 mA		"							"	3A		"	"
			16	10							"		-18 mA					"	4A		"	"
			17	11							"				-18 mA			"	5A		"	"
			18	12							"						-18 mA	"	6A		"	"
	I_{IL}	3009	19	13	0.4 V						"							5.5 V	1A	3/	3/	µA
	"	"	20	14			0.4 V				"							"	2A		"	"
	"	"	21	15					0.4 V		"							"	3A		"	"
	"	"	22	16							"		0.4 V					"	4A		"	"
	"	"	23	17							"				0.4 V			"	5A		"	"
	"	"	24	18							"						0.4 V	"	6A		"	"
	I_{IH1}	3010	25	19	2.7 V						"							"	1A		20	"
	"	"	26	20			2.7 V				"							"	2A		"	"
	"	"	27	21					2.7 V		"							"	3A		"	"
	"	"	28	22							"		2.7 V					"	4A		"	"
	"	"	29	23							"				2.7 V			"	5A		"	"
	"	"	30	24							"						2.7 V	"	6A		"	"
	I_{IH2}	"	31	25	7.0 V						"							"	1A		100	"
	"	"	32	26			7.0 V				"							"	2A		"	"
	"	"	33	27					7.0 V		"							"	3A		"	"
	"	"	34	28							"		7.0 V					"	4A		"	"
	"	"	35	29							"				7.0 V			"	5A		"	"
	"	"	36	30							"						7.0 V	"	6A		"	"
	I_O 2/ 4/ 5/	3011	37		GND	2.25 V					"							"	1Y	-30	-112	mA
	"	"	38				GND	2.25 V			"							"	2Y	"	"	"
	"	"	39						GND	2.25 V	"							"	3Y	"	"	"
	"	"	40								"	2.25 V	GND					"	4Y	"	"	"
	"	"	41								"			2.25 V	GND			"	5Y	"	"	"
	"	"	42								"					2.25 V	GND	"	6Y	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09, 10 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D		1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2		2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.		1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	V_{CC}		Min	Max	
			Type																			
			09	10																		
1 Tc = 25°C	I_{CEX} 6/			31	GND	5.5 V					GND							5.5 V	1Y		100	µA
				32			GND	5.5 V			"							"	2Y		"	"
				33					GND	5.5 V	"							"	3Y		"	"
				34							"	5.5 V	GND					"	4Y		"	"
				35							"			5.5 V	GND			"	5Y		"	"
				36							"					5.5 V	GND	"	6Y		"	"
	I_{CCH}	3005	43	37	GND		GND		GND		"		GND		GND		GND	"	V_{CC}		3	mA
	I_{CCL}	3005	44	38	4.5 V		4.5 V		4.5 V		"		4.5 V		4.5 V		4.5 V	"	V_{CC}		12	mA
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																					
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																					
9 Tc = 25°C	t_{PLH}	3003 Fig. 3	45	39	IN	OUT					GND							5.0 V	1A to 1Y	7/	7/	ns
			46	40			IN	OUT			"							"	2A to 2Y	"	"	"
		"	47	41					IN	OUT	"							"	3A to 3Y	"	"	"
		"	48	42							"	OUT	IN					"	4A to 4Y	"	"	"
		"	49	43							"			OUT	IN			"	5A to 5Y	"	"	"
		"	50	44							"					OUT	IN	"	6A to 6Y	"	"	"
	t_{PHL}	"	51	45	IN	OUT					"							"	1A to 1Y	8/	8/	"
		"	52	46			IN	OUT			"							"	2A to 2Y	"	"	"
		"	53	47					IN	OUT	"							"	3A to 3Y	"	"	"
		"	54	48							"	OUT	IN					"	4A to 4Y	"	"	"
		"	55	49							"			OUT	IN			"	5A to 5Y	"	"	"
		"	56	50							"					OUT	IN	"	6A to 6Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																		9/	9/	"
	t_{PHL}																			10/	10/	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																					

1/ Pins not referenced are N/C.
2/ Device 09 only.
3/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

4/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.
5/ I_O min/max limit for circuits B and C shall be: -30/ -110 mA.
6/ Device 10 only.
7/ For device type 09; min = 1 ns, max = 7 ns. For device type 10; min = 5 ns, max = 30 ns.
8/ For device type 09; min = 1 ns, max = 6 ns. For device type 10; min = 2 ns, max = 10 ns.
9/ For device type 09; min = 1 ns, max = 9 ns. For device type 10; min = 5 ns, max = 35 ns.
10/ For device type 09; min = 1 ns, max = 8 ns. For device type 10; min = 2 ns, max = 12 ns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 11, 12.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D		1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2		2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.		1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	V_{CC}		Min	Max	
			Type 11	12																		
1 Tc = 25°C	V_{OH} 2/	3006	1		2.0 V	-1 mA					GND							4.5 V	1Y	2.4		V
	"	"	2				2.0 V	-1 mA			"							"	2Y	"		"
	"	"	3						2.0 V	-1 mA	"							"	3Y	"		"
	"	"	4								"	-1 mA	2.0 V					"	4Y	"		"
	"	"	5								"			-1 mA	2.0 V			"	5Y	"		"
	"	"	6								"					-1 mA	2.0 V	"	6Y	"		"
	V_{OL}	3007	7	1	0.8 V	12 mA					"							"	1Y		0.4	"
	"	"	8	2			0.8 V	12 mA			"							"	2Y		"	"
	"	"	9	3					0.8 V	12 mA	"							"	3Y		"	"
	"	"	10	4							"	12 mA	0.8 V					"	4Y		"	"
	"	"	11	5							"			12 mA	0.8 V			"	5Y		"	"
	"	"	12	6							"					12 mA	0.8 V	"	6Y		"	"
	V_{IC}		13	7	-18 mA						"							"	1A		-1.5	"
			14	8			-18 mA				"							"	2A		"	"
			15	9					-18 mA		"							"	3A		"	"
			16	10							"		-18 mA					"	4A		"	"
			17	11							"				-18 mA			"	5A		"	"
			18	12							"						-18 mA	"	6A		"	"
	I_{IL}	3009	19	13	0.4 V						"							5.5 V	1A	3/	3/	µA
	"	"	20	14			0.4 V				"							"	2A		"	"
	"	"	21	15					0.4 V		"							"	3A		"	"
	"	"	22	16							"		0.4 V					"	4A		"	"
	"	"	23	17							"				0.4 V			"	5A		"	"
	"	"	24	18							"						0.4 V	"	6A		"	"
	I_{IH1}	3010	25	19	2.7 V						"							"	1A		20	"
	"	"	26	20			2.7 V				"							"	2A		"	"
	"	"	27	21					2.7 V		"							"	3A		"	"
	"	"	28	22							"		2.7 V					"	4A		"	"
	"	"	29	23							"				2.7 V			"	5A		"	"
	"	"	30	24							"						2.7 V	"	6A		"	"
	I_{IH2}	"	31	25	7.0 V						"							"	1A		100	"
	"	"	32	26			7.0 V				"							"	2A		"	"
	"	"	33	27					7.0 V		"							"	3A		"	"
	"	"	34	28							"		7.0 V					"	4A		"	"
	"	"	35	29							"				7.0 V			"	5A		"	"
	"	"	36	30							"						7.0 V	"	6A		"	"
	I_O 2/ 4/ 5/	3011	37		5.5 V	2.25 V					"							"	1Y	-20	-112	mA
	"	"	38				5.5 V	2.25 V			"							"	2Y	"	"	"
	"	"	39						5.5 V	2.25 V	"							"	3Y	"	"	"
	"	"	40								"	2.25 V	5.5 V					"	4Y	"	"	"
	"	"	41								"			2.25 V	5.5 V			"	5Y	"	"	"
	"	"	42								"					2.25 V	5.5 V	"	6Y	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 11, 12 – Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V or low ≤ 0.8 V or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D		1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case 1/ 2		2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.		1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	V_{CC}		Min	Max	
			Type																			
			11	12																		
1	I_{OH}			31	5.0 V	5.5 V					GND							5.5 V	1Y		100	µA
Tc = 25°C	6/			32			5.0 V	5.5 V			"							"	2Y		"	"
				33					5.0 V	5.5 V	"							"	3Y		"	"
				34							"	5.5 V	5.0 V					"	4Y		"	"
				35							"			5.5 V	5.0 V			"	5Y		"	"
				36							"					5.5 V	5.0 V	"	6Y		"	"
	I_{CCH}	3005	43	37	4.5 V		4.5 V		4.5 V		"		4.5 V		4.5 V		4.5 V	"	V_{CC}		6	mA
	I_{CCL}	3005	44	38	GND		GND		GND		"		GND		GND		GND	"	V_{CC}		14	mA
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																					
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																					
9	t_{PLH}	3003	45	39	IN	OUT					GND							5.0 V	1A to 1Y	7/	7/	ns
Tc = 25°C		Fig. 3	46	40			IN	OUT			"							"	2A to 2Y	"	"	"
		"	47	41					IN	OUT	"							"	3A to 3Y	"	"	"
		"	48	42							"	OUT	IN					"	4A to 4Y	"	"	"
		"	49	43							"			OUT	IN			"	5A to 5Y	"	"	"
		"	50	44							"					OUT	IN	"	6A to 6Y	"	"	"
	t_{PHL}	"	51	45	IN	OUT					"							"	1A to 1Y	8/	8/	"
		"	52	46			IN	OUT			"							"	2A to 2Y	"	"	"
		"	53	47					IN	OUT	"							"	3A to 3Y	"	"	"
		"	54	48							"	OUT	IN					"	4A to 4Y	"	"	"
		"	55	49							"			OUT	IN			"	5A to 5Y	"	"	"
		"	56	50							"					OUT	IN	"	6A to 6Y	"	"	"
10	t_{PLH}	Same tests and terminal conditions as subgroup 9, except T_C = +125°C.																		9/	9/	"
	t_{PHL}																			10/	10/	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																					

1/ Pins not referenced are N/C.
2/ Device 11 only.
3/ I_{IL} limits shall be as follows:

Parameters	Min/Max limits in µA for circuit		
	A	B	C
I_{IL}	0/-100	0/-100	0/-100

4/ Method 3011 of MIL-STD-883 shall be used, except the output shall be as specified herein, and the output current shall be operating rather than short circuit current. The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS}.
5/ I_O min/max limit for circuits B and C shall be: -30/ -110 mA.
6/ Device 12 only.
7/ For device type 11; min = 1 ns, max = 8 ns. For device type 12; min = 5 ns, max = 30 ns.
8/ For device type 11; min = 1 ns, max = 8 ns. For device type 12; min = 2 ns, max = 12 ns.
9/ For device type 11; min = 1 ns, max = 10 ns. For device type 12; min = 5 ns, max = 35 ns.
10/ For device type 11; min = 1 ns, max = 10 ns. For device type 12; min = 2 ns, max = 14 ns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Service or Defense Agency, or within the military service's system command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.

b. PIN and compliance identifier, if applicable (see 1.2).

c. Requirements for delivery of one copy of the conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

d. Requirements for certificate of compliance, if applicable.

e. Requirements for notification of change of product or process to contracting activity in addition to notification to the qualifying activity, if applicable.

f. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.

g. Requirements for product assurance options.

h. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements should not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.

i. Requirements for "JAN" marking.

j. Packaging requirements (see 5.1).

6.3 Superseding information. The requirements of MIL-M-38510 have been superseded to take advantage of the available Qualified Manufacturer Listing (QML) system provided by MIL-PRF-38535. Previous references to MIL-M-38510 in this document have been replaced by appropriate references to MIL-PRF-38535. All technical requirements now consist of this specification and MIL-PRF-38535. The MIL-M-38510 specification sheet number and PIN have been retained to avoid adversely impacting existing government logistics systems and contractor's parts lists.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-38535 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DSCC-VQ, 3990 E. Broad Street, Columbus, Ohio 43123-1199.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535, MIL-HDBK-1331, and as follows:

GND ..... Ground zero voltage potential
V_{IN} ..... Voltage level at an input terminal
V_{IC} ..... Input clamp voltage
I_{IN} ..... Current flowing into an input terminal

6.6 Logistic support. Lead materials and finishes (see 3.4) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish A (see 3.4). Longer length leads and lead forming should not affect the part number.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-35810 device types and may have slight physical variations in relation to case size. The presence of this information should not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-PRF-38535.

Military device type	Generic-industry type
01	54ALS1000/54ALS37
02	54ALS1002/54ALS28
03	54ALS1003/54ALS38
04	54ALS1008
05	54ALS1010
06	54ALS1011
07	54ALS1020/54ALS40
08	54ALS1032
09	54ALS1004
10	54ALS1005
11	54ALS1034
12	54ALS1035

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.

6.8 Manufacturers' designation. Manufacturers' circuits which form a part of this specification are designated with an "X" as shown in table IV herein.

TABLE IV. Manufacturers' designations.

Device type	Circuit		
	A	B	C
	Texas Instruments	Motorola Inc.	National Semiconductor/ Fairchild Semiconductor
01	X		
02	X		
03	X		
04	X		
05	X		
06	X		
07	X		
08	X		
09	X		
10	X		
11	X		
12	X		

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5962-2071)

Review activities:
Army - MI, SM
Navy - AS, CG, MC, SH, TD
Air Force - 03, 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:36Z
Check the source to verify that this is the current version before use.