MILITARY
SPECIFICATION

MIL-T-13420A(SigC)
2 February 1959
Superseding
MIL-T-13420(SigC)
6 May 1954

TELEPHONE SET TA-264( )/PT

1. SCOPE

1.1 This specification covers one type of portable field telephone set, designated as Telephone Set TA-264( )/PT, which provides receiving and transmitting amplification to permit communication over distances greater than can be obtained with ordinary local battery sets. (See 6.3)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

FEDERAL

T-T-871	Twine, Cotton, Wrapping.
QQ-P-416	Plating, Cadmium (electrodeposited)
QQ-S-571	Solder; Soft (Tin, Tin-Lead, and Lead Silver).
QQ-Z-325	Zinc Plating (electrodeposited)
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Boxes, Fiber.

MILITARY

MIL-W-76	Wire and Cable, Hook-up Electrical, Insulated
MIL-P-116	Preservation, Methods of.
MIL-B-117	Bags, Interior, Packaging.
MIL-T-152	Treatment, Moisture-and-fungus-resistant of Communications, Electronic & Associated Electrical Equipment.
MIL-V-173	Varnish, Moisture-and Fungus-Resistant, for the Treatment of Communications, Electronic and Associated Electrical Equipment.
MIL-W-583	Wire, Magnet, Electrical.
MIL-I-631	Insulation, Electrical, Synthetic-Resin Composition Nonrigid.
MIL-T-713	Twine and Tape, Lacing and Tying (for use in Electrical and Electronic Equipment).
MIL-R-3065	Rubber, Fabricated Parts.
MIL-C-3133	Cellular Rubber Products General Purpose (except ebonite)
MIL-I-3190	Insulation Sleeving, Electrical, Flexible, Treated.
MIL-I-7798	Insulation Tape, Electrical, Pressure-Sensitive Adhesive, Plastic..

FSC 5805

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:01Z
Check the source to verify that this is the current version before use.

MIL-T-7928	Terminals, Lug, Crimp Style, Copper, Insulated.
MIL-M-11473	Magnetic-Particle Inspection; Soundness Requirements for Weldments.
MIL-S-12883	Sockets for Plug-in Electronic Components; and Accessories, General Specification for
MIL-M-13231	Marking of Electronic Items.
MIL-T-14015	Tape, Nylon, Waxed.
MIL-F-14072	Finishes for Ground Signal Equipment.
MIL-T-15659	Terminals; Lug, Solder Type, Copper
MIL-I-17384	Insulating Compound, Electrical, Quick-Drying.

STANDARDS

MILITARY

MIL-STD-22	Welded Joint Designs
MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-122	Color Code for Chassis Wiring for Electronic Equipment.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-169	Extreme-Temperature Cycle.
MIL-STD-170	Moisture Resistance Test Cycle for Ground Signal Equipment.
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects for.
MS35436	Terminal Lug, Solder Type, Copper Stamping, Insulation Grip, One Hole.
MS35440	Terminal Lug, Solder Type, Copper Stamping, Insulation Grip, Slotted.

DRAWINGS

SIGNAL CORPS

SC-A-13621	Telephone TP-9-( ), Receiving Amplifier, Gain Frequency Response.
SC-A-13622	Telephone TP-9-( ) Transmitting Amplifier, Gain Frequency Response.
SC-D-24141	Circuit Drawings.
SC-B-61578	Grounding to Chassis.
SC-DL-105099	Drawing List for TA-264( )/PT.

2.2 Other publications.- The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

AMERICAN TRUCKING ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to the National Classification Board, 1424 16th Street, N. W., Washington 6, D. C.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

CONSOLIDATED CLASSIFICATION COMMITTEE

Uniform Freight Classification
Consolidated Freight Classification

(Application for copies should be addressed to the Consolidated Classification Committee, 202 Union Station, Chicago 6, Illinois.)

NATIONAL BUREAU OF STANDARDS

Handbook H-28 Screw Thread Standards for Federal Services

(Application for copies should be addressed to The Superintendent of Documents, Government Printing Office, Washington 25, D. C.)

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and the identifying number or symbol should be stipulated when requesting copies.)

3. REQUIREMENTS

3.1 Description.- Telephone Set TA-264( )/PT is a portable, amplifier equipped, telephone inclosed in a two compartment case. The lower part of the case houses the amplifier equipment and batteries. The upper part houses the telephone instrument, visual and audible signals, hand generator and switches. Provision is made to permit use of the telephone set without the amplifiers as a local battery telephone.

3.2 Construction.- The equipment shall be constructed in accordance with Drawing and Data List SC-D-105099 and shall meet the requirements of this specification. In case of conflict between the specification and the drawing, the specification shall govern.

3.3 Preproduction samples.- The contractor shall furnish preproduction samples for approval, as required by the invitation for bids and contract (See 6.2(d)(1)).

3.4 Parts, materials, and processes, general.-

3.4.1 Selection.- Parts, materials, and processes shall be such as to enable the equipment to meet its performance and other requirements as specified herein.

3.4.2 Parts.-

3.4.2.1 Controls.- Controls shall conform to the following requirements:

3.4.2.1.1 Effect of vibration, bounce, and shock.- Controls shall maintain their setting when the equipment is subjected to specified service conditions.

3.4.2.1.2 Direction of rotation.- Rotating controls shall be so connected in the circuit that the controlled characteristic (sensitivity, volume, voltage, etc) increases with clockwise rotation of the control as seen from the operating position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

3.4.2.1.3 Operating controls.- Operating controls shall be conveniently located and readily accessible, and shall be sufficiently rugged to withstand repeated operation by unskilled personnel.

3.4.2.1.4 Tuning-dial mechanism.- Friction in tuning-dial mechanisms shall be sufficient to maintain the tuning knob in any position over the operating range of the mechanism.

3.4.2.2 Tube sockets.- Electron tube sockets shall conform to the applicable requirements of Specification MIL-S-12883.

3.4.2.3 Tube clamps.- Tubes shall be retained securely in their sockets when the equipment is subjected to specified service conditions. A tube clamp for that purpose shall be provided for each tube having a seated height of more than 3 inches, and for any other tube where necessary to meet the foregoing requirement. The tube clamp shall apply pressure to the top of the tube envelope and shall fit firmly on any tube envelopewithin specified or design dimensions and tolerances.

3.4.3 Materials.-

3.4.3.1 Rubber.- Rubber (natural or synthetic) shall conform to Specification MIL-C-3133 for cellular type and MIL-R-3065 for other types. When "class", "grade", and "suffix" are not specified, the contractor shall submit complete data, on the application and proposed material, to the contracting officer for approval.

3.4.3.2 Wire.-

3.4.3.2.1 Magnet wire.- All magnet wire shall be in accordance with Specification MIL-W-583.

3.4.3.2.2 Hook-up wire.- Hook-up wire shall be Type MW in accordance with Specification MIL-W-76. Wherever practicable, the wire shall be stranded and shall be sufficiently large for the current carrying requirements of the circuit.

3.4.3.3 Wiring and cabling.- Wiring and cabling shall be neat and sturdy.

3.4.3.3.1 Cabling.- Insulated wires shall be formed into cables except where operation of the equipment would be adversely affected thereby or where it is physically impracticable as in the case where the resulting cables would be excessively large and would interfere with operation or maintenance of the equipment. The cabling of wires shall be effected by twine conforming to Specification MIL-T-713 or tape conforming to Specification MIL-I-7798, or MIL-T-14015.

3.4.3.3.2 Slack.- Wires and cables shall be as short as practicable except that sufficient slack shall be provided to prevent undue stress on cable forms, wires, and connections; to enable parts to be removed and replaced during servicing without disconnecting other parts; and to facilitate field repair of broken or cut wires.

3.4.3.3.3 Protection.- Wires and cables shall be so placed and protected as to avoid contact, under specified service conditions, with rough or irregular surfaces or sharp edgess. Wires shall not be bent sharply where they enter insulation material. Where wires run through holes or slots in metal (partitions, shields, and similar items), they shall be protected by suitable grommets or bushings.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:31Z
Check the source to verify that this is the current version before use.

3.4.3.3.4 Support.- Wires and cables shall be properly supported and secured, to prevent undue stress on conductors and terminals and undue change in position of the wires and cables after the equipment has been subjected to specified service conditions or has been serviced or repaired in a normal manner.

3.4.3.3.5 Clearance.- Clearance between wires or cables, and parts such as electron tubes, resistors, etc., shall be sufficient to avoid deterioration of the wires or cables because of the heat dissipated by such parts when the equipment is subjected to specified service conditions. Clearance between solder connections or bare conductors, on terminal boards, relays, or other parts, shall be at least 1/4 inch unless use of specified parts makes such clearance impracticable.

3.4.3.3.6 Splicing.- Wires in a continuous run between two terminals shall not be spliced during assembly of equipment.

3.4.3.3.7 Identification of wiring.- Wiring shall be identified by color-coding or, if approved by the contracting officer, may be identified by other means such as marking of terminals at both ends of each lead. Color-coding for chassis wiring of electronic equipment shall conform to Standard MIL-STD-122.

3.4.3.3.8 Inductive and capacitive effects.- Wires and cables shall be so located that inductive and capacitive effects, unless used as a design feature of the equipment, will be the minimum practicable.

3.4.3.3.9 Insulating sleeving.- Insulating sleeving shall not be used unless specified herein for a particular application or specifically approved by the contracting officer. Approval will not be granted when other means of insulation are practicable. If insulating sleeving is permitted it shall conform to Specification MIL-I-631 or MIL-I-3190.

3.4.3.3.10 Connections.-

3.4.3.3.10.1 General.- Before being soldered to terminal lugs or fixed terminals, wires shall be mechanically secured so that the connections are not dependent for strength on solder alone. Bared ends of wire leads to be terminated in solder-type terminal lugs shall be tinned, silver-plated, or lead-alloy coated. Electrical connections shall not be made by clamping between a metallic and a nonmetallic material. Fraying of textile ends of wires shall be prevented mechanically or by application of varnish conforming to Specification MIL-V-173. Except during overall tropicalization of the equipment, no varnish, lacquer, inspection paint, or other coating shall be applied to completed electrical connections.

3.4.3.3.10.2 Terminal lugs.- Terminal lugs shall be of the type that grips the wire insulation. Insulated solderless terminal lugs shall conform to Specification MIL-T-7928. Uninsulated solderless terminal lugs shall meet the requirements and tests of Specification MIL-T-7928 except for those requirements and tests which apply to the insulating sleeve. Solder-type terminal lugs shall conform to Specification MIL-T-15659 and shall be of the types shown on Standards MS35436 and MS35440.

3.4.3.3.10.3 Crimping of solderless terminal lugs.- Crimping of solderless terminal lugs shall be so accomplished that the connections will meet the resistance (voltage drop) and tensile strength requirements and tests of Specification MIL-T-7928. (See 4.4.3.2)

3.4.3.3.11 Terminals; fixed.- Fixed terminals (including binding posts) shall properly support the wires connected thereto and shall not turn or become loose when the equipment is subjected to specified service conditions. Where practicable, wires soldered to fixed terminals shall be looped at least once and not more than twice around the terminal before soldering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

3.4.3.3.12 Grounding.- Ground connection to shields and to other mechanical parts, except the chassis or frame, shall not be made to complete electrical circuits but only to eliminate high-potential a.c. points. Intermediate-frequency transformers, however, may be grounded through their cases if other means of grounding are impracticable.

3.4.3.3.12.1 Grounding to chassis.- Grounding to chassis shall conform to Drawing SC-B-61578.

3.4.3.3.13 Continuity.- Each conductor in the assembly shal be continuous. (See 4.4.9)

3.4.3.4 Plastic material and parts, general.- Where not machined, plastic material and parts shall have the original smooth or polished surfaces. Surfaces that have been sawed, cut, punched, or otherwise machined shall be as smooth as practicable in accordance with good manufacturing practice for the intended application.

3.4.4 Processes.-

3.4.4.1 Soldering.-

3.4.4.1.1 Solder.- Solder used for electrical connections shall be composition Sn60 conforming to Specification QQ-S-571.

3.4.4.1.2 Flux and cleaning agents.- No acid or acid salts shall be used in preparation for or during soldering; however, exception is permitted for preliminary tinning of electrical connections and for tinning or soldering of mechanical joints not used to complete electrical circuits, but in no case shall acid or acid salts be used where they can come in contact with insulation material. Where acid or acid salts are used, as permitted above, they shall be completely neutralized and removed immediately after use. Flux for soldering of electrical connections shall be rosin, rosin and alcohol, or rosin and turpentine.

3.4.4.1.3 Process.- There shall be no sharp points or rough surfaces resulting from insufficient heating. The solder shall eather out to a thin edge, indicating proper flowing and wetting action, and shall not be crystallized, overheated, or underheated. The minimum necessary amount of flux and solder shall be used for electrical connections. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign material remaining in the equipment; flux being spread over a larger area; or damage to the equipment. Insulation material that has been subjected to heating during the soldering operation shall be undamaged and parts fastened thereto shall not have become loosened.

3.4.4.2 Cleaning.- Metal parts, after fabrication, shall be cleaned in accordance with good commercial practice, or as specified in an applicable document. Cleaning processes shall have no deleterious effect on the equipment. Corrosive material shall be removed completely before parts are assembled into the equipment. After assembly, components shall be cleaned thoroughly and shall be free from particles of solder, flux, and other foreign material. If necessary, such cleaning shall also be performed before final assembly of components.

3.4.4.3 Finish, protective.- Units shall be given protective finish in accordance with Specification MIL-F-14072. This includes finish of hardware, such as handles, hinges, screws, etc, and necessary touch up after mounting. The final paint film on type I surfaces shall be green color (olive drab), semigloss enamel matching a color chip provided by the procuring agency. (See 6.9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

3.4.4.4 Marking.-

3.4.4.4.1 General.- Marking shall conform to Specification MIL-M-13231.

3.4.4.4.2 Visibility.- Wherever practicable, parts and assemblies shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.4.4.4.3 Serial numbers.- Telephone Set TA-264( )/PT shall be serial numbered.

3.4.4.5 Riveting.- Riveting shall not be used for mounting parts such as capacitors, resistors, transformers, inducters, and miniature tube sockets. Thickness of countersunk metal which accepts the heads of flush rivets shall be not less than the height of the rivet heads. The distance from the centers of rivet holes to the edges of the material in which the holes are formed shall be at least 1-1/2 times the rivet diameter. Rivets shall be used where practicable in preference to other means of securing aluminum or magnesium structural parts if the joint is subjected to dynamic tension loads when the equipment is exposed to specified service conditions and if the parts do not require removal when the equipment is serviced. After riveting, the joints shall be tight, the joined parts shall be undamaged, and the rivet heads shall be properly seated and tight against their bearing surfaces.

3.4.4.6 Welding.- Welds shall be of ample size. Where tack or spot welds are employed, the number of welds shall be sufficient to provide adequate strength and at least two welds shall be used to hold each welded part. Spot or tack welds in aluminum or magnesium shall be limited to lightly stressed, non-critical structures. Wherever practicable, the welded joint shall conform to Standard MIL-STD-22, and shall be such that grinding on the finished weld will be unnecessary. Surfaces to be welded shall be cleaned in accordance with good commercial practive and shall be free from rust, scale, paint, grease, and other foreign material.

3.4.4.6.1 Process.- Preheating shall be employed where distortion is likely to result from welding. Welds shall have thorough penetration and good fusion and shall be free from scabs, blisters, abnormal pock marks, and other harmful defects. Where undesirable internal stresses are likely to result from welding, the welded assembly shall be stress-relieved. Inert-gas-shielded arc welding shall be used when practicable for welding of aluminum or magnesium.

3.4.4.7 Securing of parts.-

3.4.4.7.1 General.- Brackets, lugs, flanges, inserts, bolts, and other mounting arrangements shall be such as to retain components and parts securely when the equipment is subjected to specified service conditions. Parts shall be so mounted that loosening, wear of mounting arrangements, or permanent separation of parts will not occur when the equipment is subjected to specified bounce and shock tests. Any permanent deformation resulting from the tests shall not cause degradation of equipment performance below full specification requirements. Where practicable, friction between mating surfaces shall not be employed as the sole means of preventing fixed parts from rotating. Parts shall be secured in such manner that failure of a single rivet or screw will not free the part completely.

3.4.4.7.2 Securing of parts by threaded fasteners.- Securing of parts by threaded fasteners to hard material or soft material (aluminum, magnesium, zinc, plastic, etc.) except wood, shall conform to the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

3.4.4.7.3.1 General.- Except as specified below, a flatwasher shall be used between any screwhead and soft material unless the shape of the head is such that the flatwasher is unnecessary.

3.4.4.7.2.2 Mounting of soft material to soft material.-

(a) Through-screw secured by a locknut. This method is preferred.

(b) Nylok screw as made by the Nylok Corporation, New York, New York, or equal, in bushing, nut, or insert. The bushing, nut, or insert shall be permanently secured to the structure.

(c) Screw in tapped hole with a Tap-Lok insert as made by the Groove Pin Corporation, Ridgefield, New Jersey, or equal. The manufacturer's installation instructions and recommended tools shall be employed.

(d) Screw in tapped hole or through-screw with plain nut, with insulating compound conforming to Specification MIL-I-17384 applied around the screwhead or around the screwhead and nut, as applicable. This method shall be used only for small screw-sizes and where one of the foregoing means is impracticable.

(e) Stud in tapped hole. One end of the stud and the tapped hole in which it is inserted shall be National coarse thread; the other end shall be National fine thread. A wire screw-thread insert shall be used if required for thread reinforcement.

(f) Screw in tapped hole. This method shall be used only for holding labels or similar lightweight parts not used for structural purposes or critical applications and, in particular, shall not be used when frequent disassembly may be necessary. Use of a flatwasher in this application is not mandatory.

3.4.4.7.2.3 Mounting of hard material to soft material.-

(a) As specified in 3.4.4.7.2.2

(b) Screw, with a split helical lockwasher under screwhead, in bushing, nut, or insert. The bushing, nut, or insert shall be permanently secured to the structure.

(c) Screw, with split helical lockwasher under screwhead, in tapped hole protected by a wire screw-thread insert as made by the Heli-Coil Corporation, or equal. The manufacturer's installation instructions and recommended tools shall be employed.

3.4.4.7.3 Screws, other threaded devices, and related items.-

3.4.4.7.3.1 Form and fit.- Unless otherwise specified, screw threads shall conform to Handbook H28 and supplement thereto; the Unified Thread Form and Series shall be class 2A or 2B fit, and the American National Thread Series shall be class 2 fit.

3.4.4.7.3.2 Material.- Where permitted by design considerations, and unless otherwise specified, screws, other threaded devices, and related items shall be of steel having cadmium plating, type II, class 3, conforming to Specification QQ-P-416; of steel having zinc plating, type II, class 3, conforming to Specification QQ-Z-325; or of corrosion-resistant steel, passivated.

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:31Z
Check the source to verify that this is the currentversion before use.

3.4.4.7.3.3 Selection.- When practicable, machine screws, cap screws, and lockwashers shall be selected from the List of Military Standards Covering Fasteners.

3.5 Tropicalization.-

3.5.1 Treatment of assembled equipment.- Assembled equipment shall be treated in accordance with Specification MIL-T-152 unless both of the following conditions are met:

(a) Each component part and subassembly meets one of the following:

(1) It is furnished under an individual, detailed Government document (specification, standard, drawing, etc.) which is applicable on contract.

(2) It does not incorporate any material listed in 3.5.3 unless the material has been given the treatment specified herein or a treatment approved by the contracting officer.

(3) It does not comply with (1) or (2) above but its use has been approved by the contracting officer for the particular application.

(b) The finish of the interior of the equipment meets the requirements of Specification MIL-F-14072.

3.5.2 Treatment of materials.-

3.5.2.1 Treating materials.- Treating materials containing a mercury-bearing fungicide shall not be used. The contractor shall determine that the treating material is compatible with the material or surface to be treated. Selection of treating materials shall be such that any increase in flammability of treated material is held to the practical minimum.

3.5.2.2 Toxicity.- Treatment of materials shall cause no skin irritation or other injury to personnel handling the treated material either during fabrication of the equipment or when carrying, operating, or maintaining the equipment, or in use of the finished items when used for the purpose intended.

3.5.2.3 Flexibility.- Treatment shall not affect flexibility of treated materials, to the extent that the equipment may fail to meet specified requirements when subjected to specified service conditions.

3.5.2.4 Statement of treatment.- The contractor shall submit, to the contracting officer for approval, a statement describing in detail the materials to be treated and the treating materials and processes that he proposes to use. When assembled equipment is treated in accordance with Specification MIL-T-152, the above statement shall be incorporated in the statement of treatment required by that specification. (See 6.2.4)

3.5.3 Materials not resistant to moisture and fungi.- The following materials are considered not resistant to moisture and fungi:

(a) Cellulose, regenerated.
(b) Cotton.
(c) Cork.
(d) Felt, hair or wool.
(e) Jute.
(f) Leather.
(g) Linen.
(h) Paper, paperboard, cardboard, organic fiberboard, vulcanized fiber, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

(i) Thermosetting plastic materials using cotton, linen, or wood-flour as a filler or base.

3.6 Service conditions.- The equipment shall meet the following service conditions:

3.6.1 Equipment nonoperating.- Except as stated in 3.6.1(b), the equipment shall comply with the operational requirements of 3.6.2 after subjection to any of the following nonoperating conditions successively or in combinations encountered during worldwide short-term storage and transit:

(a) Temperature.- Exposure in the range of ±160°F. to -80°F. However exposure at the high temperature extreme not to exceed 4 hours and at the low temperature extreme not to exceed 24 hours at any one time (See 4.6.1).

(b) Relative humidity.- Relative humidity up to 97 percent, for an indefinite period of time; and exposure at 100 percent relative humidity with condensation, for 4 hours. Following subjection to such conditions and a power-on period of 16 hours at normal room temperature and relative humidity, the equipment shall meet the requirements of 3.6.2.

(c) Immersion.- To comply with the requirements of 4.6.3.

(d) Vibration, bounce, and shock.- As detailed in 3.9.1, 3.9.2, 3.9.3 and 3.9.4.

(e) Elevation.- Elevation up to 25,000 feet above sea level. (See 4.6.8)

3.6.2 Equipment operating.- The equipment shall meet the performance requirements of this specification while subjected to any of the following conditions successively or in combinations likely to be encountered during worldwide operations:

(a) Temperature.- Ambient temperature in the range of ±150°F. to -40°F. (The 150°F. temperature includes effect of sun-load.) Exposure at the high temperature extreme not to exceed 4 hours and at the low temperature extreme not to exceed 24 hours, or until stabilized by three successive readings. (See 4.6.2.1)

(b) Relative humidity.- Relative humidity up to 97 percent; and exposure at 100 percent relative humidity, with condensation, for a period of 4 hours. (See 4.6.2.1)

(c) Elevation.- Elevation up to 10,000 feet above sea level. (See 4.6.8)

3.7 Electrical requirements.-

3.7.1 Sidetone.- Provision for sidetone shall be made in the receiver of the handset. The power level of the sidetone, as measured across a 600-ohm resistor connected in place of the handset receiver, shall be between -20 dbm and -35 dbm at all frequencies in the range of 400 to 3500 cycles per second, when the output at the line terminals is ±13 dbm into a 600-ohm resistor.

3.7.2 Impedance.- The impedance of the receiver circuit at the line terminals shall be 600 ohms ±10 percent. (See 4.7.5)

3.7.3 Power output and distortion of amplifiers.- The transmitting and receiving amplifiers shall be capable of meeting the power output and harmonic distortion requirements listed in table I, at all frequencies in the specified range.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:31Z
Check the source to verify that this is the current version before use.

Table I - Power Output and Distortion of Amplifiers

Amplifier	Load	Frequency Range (Cycles per sec)	Minimum Power Output	Maximum Harmonic Distortion
Transmitting	600 ohms at the line	400 to 3500	13 dbm	5-1/2 % at +10 dbm output
Receiving	600 ohms in place of telephone receiver	400 to 3500	0 dbm	5-1/2 % at 0 dbm output

3.7.4 Amplifier gain-frequency characteristics.- With the amplifiers loaded as specified in paragraph 3.7.3 their gain-frequency characteristics shall be as follows:

(a) With the control set for minimum gain, the gain of the receiving amplifier shall be 0 ±3.5 db at 1000 cycles per second.

(b) With the control set for maximum gain, the gain of the receiving amplifier shall be as shown on Drawing SC-A-13621 within ±3.5 db at 300 and 1000 cycles per second, within ±4.5 db at 2000 cycles per second and, at 3500 cycles per second, the gain shall be not more than the corresponding value on Drawing SC-A-13621.

(c) The gain of the transmitting amplifier shall be as shown on Drawing SC-A-13622, within ±2.5 db at 400 and 1000 cycles per second, within ±1.5 db at 2000 cycles per second, and within ±2.0 db at 3500 cycles per second.

3.7.5 Amplifier gain-load characteristics.- The gain-load characteristics of the transmitting and receiving amplifiers shall meet the following requirements at frequencies of 400, 1000, 2000, 2500, and 3500 cycles per second.

(a) The total variation in gain of the transmitting amplifier shall not exceed 1.5 db at each frequency when the output power is varied from 0 dbm to +13 dbm. The measuring circuit shall be in accordance with figure 2.

(b) With the gain control set at a maximum, the total variation of the receiving amplifier shall not exceed 1.5 db at each frequency when the output power is varied from -15 dbm to +3 dbm. The measuring circuit shall be in accordance with figure 3.

3.7.6 Circuits.- The telephone shall provide the circuits shown on Drawing SC-D-24141. The parts shall have the values, ratings, and tolerances shown thereon.

3.7.7 Operation.- There shall be no evidence of degradation in performance or ease of operation during or at completion of tests of section 4 as specified in 4.7.3.

3.7.8 Breakdown voltage.- Electrical insulation shall have a minimum breakdown voltage of 400 volts d.c. or sinusoidal 60 cycle a.c. with a peak value of 400 volts.

After a 10 second application of the voltage, there shall be no visible deterioration, and the equipment shall meet specified performance requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

3.8 Facsimiles.- In addition to any facsimiles specified by referenced documents, 4 copies of Facsimile of Circuit Labels shall be submitted for approval to the contracting officer. (See 6.2(i).)

3.9 Vibration, bounce and shock.-

3.9.1 Vibration.- Except for internal resonance of specified parts and subassemblies, the equipment shall have no mechanical resonance below 55 cycles per second. (See 4.6.4)

3.9.2 Bounce.- The equipment shall meet full specification performance requirements and shall show no physical damage except surface abrasion when subjected to the test of 4.6.5.

3.9.3 Shock (drop).- The equipment shall be operable after completion of test specified in 4.6.6. Minor damages (scratches, abrasions) are permissible.

3.9.4 Shock (bench-handling).- The equipment shall be operable after completion of test specified in 4.6.7. Minor damages (scratches and abrasions) are permissible.

3.10 Interchangeability.- Corresponding units and replaceable assemblies, subassemblies, and parts on contract shall be physically and functionally interchangeable as complete items without modification thereof or of other articles with which the items are used. (See 4.9). When dimensions, ratings, characteristics, etc, are not specified, the manufacturer's design limits shall be used todetermine compliance with the foregoing. If the contractor is in doubt as to whether a particular assembly, subassembly, or part is to be considered replaceable, the contracting officer shall be consulted.

3.11 Technical literature and running spare parts.- Technical literature and running spare parts shall be furnished as specified in the contract. Running spare parts shall be identical to corresponding parts in the items furnished on the order. (See 6.2 (g) and (h)).

3.12 Preconditioning.- Items shall be capable of meeting the inspection of section 4 without subsequent processing, after subjection to the bounce preconditioning of 4.5. (Also see 4.4)

3.13 Workmanship.- The equipment shall be manufactured and assembled in accordance with the applicable portions of the following paragraphs herein:

3.2 Construction
3.4 Parts, Materials and Processes, General
3.4.2 Parts
3.4.2.1 Controls
3.4.2.2 Tube Sockets
3.4.2.3 Tube Clamps
3.4.3 Materials
3.4.3.1 Rubber
3.4.3.2 Wire
3.4.3.3 Wire & Cabling
3.4.4 Processes
3.4.4.1 Soldering
3.4.4.2 Cleaning
3.4.4.3 Finish, Protective
3.4.4.4 Marking
3.4.4.5 Riveting
3.4.4.6 Welding
3.4.4.7 Securing of Parts
3.5 Tropicalisation
3.7.6 Circuits

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

"4.1 Contractor responsibility.- Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order."

4.2 Classification of inspection.- Inspection shall be classified as follows:

(a) Preproduction inspection. (Does not include preparation for delivery). (See 4.3)

(b) Procurement inspection. Procurement inspection shall be the inspection performed by the contractor and by the Government as specified by (4.4 and 4.10).

(1) Procurement inspection of items before preparation for delivery. (See 4.4)

(2) Procurement inspection of preparation for delivery. (See 4.10 and section 5)

4.3 Preproduction inspection.- This inspection shall consist of the preproduction inspection specified in table II and the group A, group B and group C inspection specified in tables III, IV, and V. Other nondestructive tests on preproduction samples may be performed to determine compliance with specified requirements. The preproduction inspection will normally be performed in this order: (1) vibration (2) bounce (3) shock (drop) and (4) immersion; other preproduction inspection may precede, follow, or be interspersed between the foregoing.

Table II - Preproduction Inspection

Inspection	Requirement Paragraph	Inspection Paragraph
Temperature	3.6.1(a) and 3.6.2(a)	4.6.1
Moisture Resistance	3.6.1(b) and 3.6.2(b)	4.6.2
Altitude	3.6.1(c) and 3.6.2(c)	4.6.8

4.4 Procurement inspection of items before preparation for delivery.- The minimum inspection performed by the contractor shall be as specified by (a) through (d) below --to demonstrate compliance with specified requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's records. In addition, the Government -- at its discretion will verify, by product inspection, the contractor's compliance with specified requirements. (See 6.8) Such verification shall not exceed the amount of inspection required herein of the contractor.

(a) Procurement inspection shall consist of group A, group B, and group C inspection as specified in 4.4.1 through 4.4.3.2.

(b) When Standard MIL-STD-105 specifies action by the Government, the Government may authorize the contractor to perform any of such actions except that responsibility for acceptance rests with the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

(c) Group B inspection shall normally be performed on inspection lots that have passed group A inspection and on samples selected from units that have been subjected to and met the group A inspection. In addition, group C inspection shall normally be performed on sample units that have been subjected to and met group B inspection. However, the order may be, varied when it is considered more practical to select separate samples for group B or group C inspection or both.

(d) Each unit which will be subjected to group A, group B, or group C inspection shall be preconditioned after final assembly. (See 3.12)

4.4.1 Group A inspection.- This inspection (including sampling) shall conform to table III and Standard MIL-STD-105. Unless otherwise specified normal inspection shall be used at the start of the contract. Group A inspection shall be performed in any order which is satisfactory to the Government, except that the operational inspection (4.7.3) shall be last. (See 6.7)

Table III - Group A Inspection

Inspection	Requirement Paragraph	Inspection Paragraph	AQL Major	AQL Minor
Visual and Mechanical	3.13	4.7.1	1.5 dphu	6.5 dphu
Welding	3.4.4.6	4.8	1.0%	4.0%
Electrical				
Sidetone	3.7.1	4.7.4	1.5 dphu for group	*
Impedance	3.7.2	4.7.5		
Breakdown voltage	3.7.8	4.7.2		
Operational	3.7.7	4.7.3	1.0%	*

*All electrical and operational defects are considered major.

4.4.2 Group B inspection.- This inspection (including sampling) shall conform to table IV and the appendix to Standard MIL-STD-105. Unless otherwise specified herein, normal inspection shall be used at the start of the contract. The reduced inspection procedure shall be R-1. Disposition of nonconforming product (sample units and inspection lots) shall be in accordance with 4.4.5 and the requirements of Standard MIL-STD-105 for disposition of rejected product.

4.4.2.1 Group B sampling plans.- The group B sampling plans, as listed in table IV, shall be as follows:

AQL	Inspection Level for Normal Inspection	Inspection Level for Reduced Inspection
6.5%	L-7	L-5
10.0%	L-6	L-4

4.4.2.2 Order of inspection within group B.- Group B inspection shall be performed in any order which is satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:31Z
Check the source to verify that this is the current version before use.

Table IV - Group B Inspection

Inspection	Requirement Paragraph	Inspection Paragraph	AQL
Power output and distortion of amplifier	3.7.3	4.7.6	6.5% for group
Amplifier gain-frequency characteristics	3.7.4	4.7.7	
Amplifier gain-load characteristics	3.7.5	4.7.8	
Immersion	3.6.1(e)	4.6.3	10%
Interchangeability	3.10	4.9	6.5%

4.4.3 Group C inspection.- This inspection shall be as listed in table V.

4.4.3.1 Sampling for inspection of equipment.- Two units of product for group C inspection shall be selected each month, without regard to their quality.

4.4.3.2 Sampling for inspection of solderless-terminal-lug connections.- Five specimens of each combination of wire and terminal shall be prepared each week for inspection. A speciment is a 1-foot length of wire on which a terminal lug has been applied, using the same tools and procedures used in crimping the terminal lugs in production of the items on contract.

4.4.3.3 Noncompliance.- If a sample unit fails group C inspection, the contractor shall immediately investigate the cause of failure and shall report to the Government inspector the results thereof and details of the corrective action taken on the process and all units of product which were manufactured with the same conditions, materials, processes, etc. If the Government inspector does not consider that the corrective action will enable the product to meet specified requirements, or if the contractor cannot determine the cause of failure, the matter shall be referred to the contracting officer. (See 6.5)

Table V - Group C Inspection

Inspection	Requirement Paragraph	Test Paragraph
Vibration	3.9.1	4.6.4
Bounce	3.9.2	4.6.5
Shock (drop)	3.9.3	4.6.6
Shock (Bench handling)	3.9.4	4.6.7
Terminal lugs	3.4.3.3.10.2 and 3.4.3.3.10.3	4.4.3.2

4.4.4 Reinspection of conforming group B and group C sample units.- Unless otherwise specified, sample units which have been subjected to and passed group B or group C inspection, or both, may be accepted on contract, provided that they are resubjected to and pass group A inspection after repair of all visible damage.

4.4.5 Disposition of nonconforming product.- The following shall be suitably tagged or identified by equivalent means to indicate the cause of failure and means employed to correct the fault:

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:31Z
Check the source to verify that this is the current version before use.

Sample units found defective during group A, B, or C inspection.

Product which has been reworked as a result of failure during group C inspection.

The required information shall be presented to the Government when the product is submitted and shall become the property of the Government.

4.5 Bounce preconditioning.- The unit shall be placed in its normal operating position on the table of the package tester as made by the L.A.B. Corporation, Skaneateles, New York, or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32-inch-thick strip of material under one corner or edge of the unit to a distance of 3 inches as the unit bounces. The unit shall be subjected to this preconditioning for 1 minute. After bounce preconditioning, the unit shall not be repaired, alined, cleaned or otherwise changed prior to subjection to procurement inspection. (See 3.12.)

4.6 Environmental inspection.-

4.6.1 Temperature test.- The equipment shall be subjected to the temperature cycle of MIL-STD-169. The tests shall be made at step 4 and step 8 in addition to these steps specified in MIL-STD-169. (See 3.6.1 & 3.6.2)

4.6.2 Moisture-resistance test for equipment.-

4.6.2.1 Test conditions.-

(a) Do not move equipment from the humidity chamber for measurements.

(b) Start measurements not more than 5 minutes after power is applied to the equipment. Complete measurements as rapidly as possible. Do not leave power on after measurements have been completed.

4.6.2.2 Test procedure.-

(a) Dry at 130° ±5°F. for 24 hours.

(b) Condition at 77° ±5°F. and 40 to 50 percent relative humidity for 24 hours.

(c) Take measurements as specified in 4.6.2.3, and readjust or realine as necessary to meet full specification requirements.

(d) Subject to continuous cycling for five each (5) 48-hour cycles. Temperature, relative humidity, and period of time for each portion of the cycle shall conform to Standard MIL-STD-170. The measurements specified in 4.6.2.3 shall be made during the periods shown on the standard and shall comply with 4.6.2.3.

(e) After cycling has been completed, condition the equipment for 24 hours at 77° ±5°F. and 40 to 60 percent relative humidity. Then adjust for optimum performance, using only those means provided by the equipment. No repair or replacement of parts shall be made. After adjustment, the equipment shall meet full specification requirements for those measurements specified in 4.6.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

4.6.2.3 Performance.- Measurements made during test and specified performance during cycling shall be as specified in 4.7.2 through 4.7.8.

4.6.2.4 Failure.- If any equipment fails to meet the performance specified in 4.6.2.3 during cycling, it shall be realined or readjusted once. If the equipment then fails to meet or fails subsequently during cycling, it does not pass the test. In addition, if the equipment fails to meet full specification requirements after conditioning and adjustment, as specified in 4.6.2.2(e), it does not pass the test.

4.6.3 Immersion.- The equipment, as packed for field transport, shall be immersed to a minimum depth of 3 feet of fresh water for 2 hours. Immediately prior to immersion, the temperature of the equipment shall be approximately 40°F. above the temperature of the water. The tank in which the equipment is immersed shall be of sufficient capacity to maintain the water within ±2°F. of its initial temperature or the temperature of the water shall be maintained (within those limits) by other means. After completion of the 2 hour period of immersion, the equipment shall be removed from the water and wiped dry on exterior surfaces. There shall be no evidence of leakage when the equipment is opened.

4.6.4 Vibration test.- The equipment shall be tested for resonant frequencies below 55 cycles per second, to determine compliance with 3.9.1 as follows:

(a) The equipment shall be fastened in its normal mounting position on a vibration table that can be controlled within 10 percent of the specified amplitude. Equipment shock mounts, if any, shall be blocked. The vibration table shall provide approximately sinusoidal vibration.

(b) The equipment shall be vibrated successively in three mutually perpendicular directions that are parallel respectively to the edges of the equipment, over a frequency range of 10 to 55 cycles per second, in 1-cycle-per-second steps. The total excursion shall be constant at 1/64 inch.

(c) Mechanical resonance, if any, of the complete structure, of subassemblies, and of component parts shall be determined visually by means of a Strobotac, as made by the General Radio Corporation, Cambridge, Massachusetts, or equal, or by energizing the equipment and detecting mechanical vibration through electrical output indications.

(d) If it is not practical to determine completely any mechanical resonances on the assembled equipment unit because of its compactness, or the inaccessibility of its subassemblies or component parts, the unit shall be broken down into logical subassemblies for the above vibration test. Such subassemblies shall be secured to the vibration table in the same manner as they are secured in the equipment unit.

4.6.5 Bounce test.- The equipment, in its transit case (if any), shall be placed on the table of the package tester as made by the L.A.B. Corporation, Skaneateles, New York, or equal, and shall be constrained from the horizontal motion of more than 2 inches by suitable wooden fences. The package tester, shafts in phase, shall be operated at a speed of 285 r.p.m. ±1 percent, for a total of 3 hours. During each 1/2-hour period of the test, the packaged equipment shall rest on a different face. (See 3.9.2)

4.6.6 Shock test (drop).- The equipment in its transit case, shall be subjected to drop test, from a height of 48 inches, made from a quick release hook, or pendulum tester as made by the L. A. B. Corporation, Skaneateles, New York, or equal, on each face, edge and corner for a total of 26 drops. (See 3.9.3)

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:31Z
Check the source to verify that this is the current version before use.

4.6.7 Shock test; bench-handling.- The chassis-and subassembly shall be removed from its enclosure, as for servicing, and placed in a suitable position for servicing on a solid, 2-inch fir bench top. The test shall be performed as follows, in a manner simulating shocks liable to occur during servicing: (See 3.9.4)

(a) Tilt up the assembly through an angle of 30 degrees, using one edge of the assembly as an axis, and permit the assembly to drop back freely to the horizontal. Repeat, using other practicable edges of the same horizontal face as axes, for a total of four drops.

(b) Repeat "(a)", with the assembly resting on other faces, until it has been dropped for a total of four times on each face on which the assembly could be placed practicably during the servicing.

4.6.8 Altitude test.- The equipment shall be placed in an altitude chamber at normal conditions of temperature, pressure, and humidity, and shall be tested to determine compliance with electrical requirements. The pressure shall then be reduced to 20 inches of mercury and stabilized for 2 hours. The equipment shall again be tested. The pressure shall then be lowered to 11 inches of mercury and the chamber maintained at this pressure for another 2-hour period. The pressure shall then be increased to 29.9 inches of mercury and tested again. There shall be no degradation of performance in the second and third measurements from those established in the first test. (See 3.6.1 & 3.6.2)

4.7 Performance inspection.-

4.7.1 Visual and mechanical examination.- Parts and equipment shall be examined for the defects listed in Standard MIL-STD-252.

4.7.2 Breakdown voltage.- All wiring in the equipment shall be tested to show compliance with requirements of paragraph 3.7.8.

4.7.3 Operational test.- Telephone TA-264( )/PT shall be connected to the approved preproduction sample or other standardized unit through circuits representing 10 and 40 miles respectively, of wire WD-1/TT, in wet condition. The equivalent length of the connecting circuit shall be variable from zero up to the operating limit of the telephone. All circuits, adjustments, and controls shall be tested for performance at least equal to that of the approved sample.

4.7.4 Sidetone.- The equipment shall be tested in accordance with figure 1 to show compliance with 3.7.1.

4.7.5 Impedance.- Impedance of the receiver circuit shall be 600 ohms ±20 percent when measured with a STARR BRIDGE, or equal. See 3.7.2.

4.7.6 Power output and distortion of amplifiers.- Transmitting measurements shall be made in accordance with figure 2 and receiving measurements shall be made in accordance with figure 3 to show compliance with 3.7.3.

4.7.7 Amplifier gain-frequency characteristics.- Response measurements shall be in accordance with Drawings SC-A-13621 and SC-A-13622 and conform to the requirements of 3.7.4.

4.7.8 Amplifier gain-load characteristics.- Transmitting amplifier variation measurements shall be made in accordance with figure 2 and receiving amplifier variation measurements shall be made in accordance with figure 3 and conform to the requirements of 3.7.5.

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:31Z
Check the source to verify that this is the current version before use.

4.7.9 Continuity test for equipment.- Electrical continuity of wiring and other connections, including ground connections to the chassis, shall be verified by a point-to-point test. (See 3.4.3.3.13)

4.8 Welding inspection.- Welding shall be inspected by the magnetic particle method specified in Specification MIL-M-11473 and by the ultrasonic method using a reflectoscope as made by Sperry Products Incorporated, Danbury, Connecticut or equal. Both Tests shall be performed on each sample unit. (See 3.4.4.6)

4.9 Inspection for interchangeability.- The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirements of 3.10. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

(a) External and internal dimensions of cases, covers and insertable subassemblies, when such dimensions affect mating of parts.

(b) Internal dimensions of cavities in cases and assemblies, when such dimensions affect acceptability of insertable subassemblies.

(c) Location of hinges and fasteners on separable parts or assemblies which must mate together, such as cases, covers, and mountings.

(d) Location of connectors, locking pins, fasteners, slides, and mountings on plug-in assemblies.

4.10 Procurement inspection of preparation for delivery.- The minimum inspection performed by the contractor shall be as specified in 4.10.1 and 4.10.2. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's records. In addition, the Government at its discretion, will verify by product inspection the contractor's compliance with specified requirements. (See 6.8) Such verification shall not exceed the amount of inspection required herein of the contractor. When Standard MIL-STD-105 specified actions by the Government, the Government may authorize the contractor to perform any of such actions except that responsibility for acceptance rests with the Government.

4.10.1 Preservation and packaging.- Inspection of preservation and packaging shall be as specified in Specification MIL-P-116. Classification of defects shall be as shown in table VI.

CLASSIFICATION OF DEFECTS FOR PRESERVATION, PACKAGING AND MARKING

TABLE VI

MAJOR	MINOR
1. Use of improper or defective material.	1. Item not properly blocked or braced within the unit package to prevent movement.
2. Quantity in unit package not as specified.	2. Packaging material damaged.
3. Incorrect packaging method applied.	3. Conforming crops are not snug-fitting and contain voids.
4. Cushioning or padding omitted.	
5. Cushioning inadequate for the physical and mechanical protection of the item.	

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:31Z
Check the source to verify that this is the current version before use.

MAJOR (Cont'd)

6. Unsealed, punctured, or improperly sealed barrier bag, wrap, or envelope.

7. Stock number omitted, incorrect, or illegible.

8. Nomenclature omitted, incorrect, or illegible.

9. Marking of quantity of items in-packaged omitted, incorrect or illegible.

MINOR (Cont'd)

4. Any item of marking information other than 7 thru 9 omitted, incorrect, or illegible.

4.10.2 Packing and marking of exterior containers.- Packing and marking of exterior containers shall be given visual inspection for the defects listed below and to determine conformance with the approved process sheet furnished by the contractor as required by the contract. This inspection shall conform to the appendix to Standard MIL-STD-105. Inspection level L-8 shall be used for normal inspection and L-6 for reduced inspection. Unless otherwise specified herein, normal inspection shall be used at the start of the contract. The reduced inspection procedure shall be R-1. The AQL for major defects shall be four percent and the AQL for minor defects shall be ten percent. Classification of defects shall be as shown on table VII.

CLASSIFICATION OF DEFECTS FOR PACKING AND MARKING

TABLE VII

MAJOR

1. Use of improper or defective material.

2. Gross weight in excess of specified amount.

3. Box closure not as specified.

4. Type, grade, class, and style of the shipping container not as specified.

5. Strapping omitted.

6. Strapping inadequate or incorrectly applied.

7. Items not adequately blocked, braced, or cushioned within the shipping container to prevent movement or damage.

8. Shipping documents or packing list omitted.

9. Stock number omitted, incorrect, or illegible.

10. Nomenclature omitted, incorrect, or illegible.

MINOR

1. Unsealed carton.

2. Defective taping or sealing of carton.

3. Any other box defect which may be considered minor by definition of Standard MIL-STD-105.

4. Any item of required marking information other than 9 thru 15 listed under major defects omitted, incorrect, or illegible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

MAJOR (Cont'd)

11. Marking of quantity of items in pack, omitted, incorrect, or illegible.

12. Destination marking omitted, incorrect, or illegible.

13. Service designation (color marking) omitted.

14. Special marking or labeling (when required) omitted.

15. Overseas code marking omitted, incorrect, or illegible.

4.10.2.1 Inspection lot.- A lot for visual inspection of the pack shall be all completed packs which are identical and will be submitted for acceptance at one time.

4.10.2.2 Disposition of nonconforming product.- Disposition of nonconforming product (sample units and inspection lots) shall be in accordance with the requirements of Standard MIL-STD-105 for disposition of rejected product. When submitted for acceptance, such product shall be suitably tagged or identified by equivalent means to indicate the cause of failure and means employed to correct the fault. The required information shall be presented to the Government when the product is submitted and shall become the property of the Government.

4.10.3 Rough handling test.- When rough handling test in accordance with Specification MIL-P-116 is required by the contract, the following functional tests shall be conducted to determine freedom from operational malfunction caused by the rough handling:

(a)	Operational test	4.7.3
(b)	Visual and mechanical	4.7.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.-

5.1.1 Level A.- Each Telephone Set TA-264( )/PT shall be preserved and packaged in accordance with the procedures specified for the designated methods as prescribed in Specification MIL-P-116 and as described herein.

5.1.1.1 Technical manual.- Each technical manual shall be packaged Method IC-3 as follows: Inclose each technical manual within a close-fitting, type II, class b bag, conforming to Specification MIL-B-117. Heat seal the bag to effect closure.

5.1.1.2 Telephone Set TA-264( )/PT.-

5.1.1.2.1 Prepackaging.- Form the carrying strap into a neat bundle and secure to the handset with 6 ply cotton twine conforming to Specification T-T-871. Place the telephone set items and spare tube within the compartments of the carrying case. Close the case and secure all fastenings.

5.1.1.2.2 Packaging.-

5.1.1.2.2.1 Carrying Case with contents.- Each carrying case with contents shall be packaged Method IC-5 as follows: Cushion each case with contents on all surfaces with cells or pads or both fabricated of double faced corrugated fiberboard designed to absorb the shock of impact encountered in handling and transit. Fiberboard shall have water resistant qualities equal to that of the fiber box specified. Place the cushioned case within a close-fitting, RS style CF box, class 2, W5c, conforming to Specification PPP-B-636. Place the technical manual (see 5.1.1.1) between the contents and flaps of the box. Box closure shall be as specified in the appendix of the box specification.

5.1.2 Level C.- Telephone Set TA-264( )/PT shall be packed in accordance with commercial practice and in a manner that will afford protection against corrosion, deterioration and physical damage during direct shipment to the first receiving activity.

5.2 Packing.-

5.2.1 Level A.- Telephone Set TA-264( )/PT shall be packed for shipment within close-fitting, style 4, class 2, nailed wood boxes, or style A overseas type, wood cleated plywood boxes, conforming to Specification PPP-B-621 or PPP-B-601 as applicable. The weight of any one box with contents shall not exceed 200 pounds. Box closure shall be in conformance with the applicable box specification or appendix thereto.

5.2.1.1 Metal strapping.- Shipping containers shall be strapped in conformance with the requirements of the appendix of the applicable container specification only for direct shipment to ports.

5.2.2 Level B.- Telephone Set TA-264( )/PT shall be packed for shipment as specified in 5.2.1 except boxes shall be domestic class or type.

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:31Z
Check the source to verify that this is the current version before use.

5.2.3 Level C.- Telephone Set TA-264( )/PT shall be packed for shipment in a manner conforming to the requirements of Uniform Freight Classification No. 4 and Consolidated Freight Classification, Rule 21 for rail shipment, National Motor Freight Classification No. A-3 and No. 14 for truck shipment, Parcel Post Regulations, and the regulations of other carriers as applicable to the mode of transportation employed at lowest transportation rate.

5.3 Marking.-Interior packages and exterior shipping containers shall be marked in accordance with the applicable provisions of Standard MIL-STD-129.

6. NOTES

6.1 Intended use.- Telephone TA-264( )/PT is intended to provide communication over greater distances than those obtained with ordinary local battery type sets. This is made possible by the use of vacuum tube amplifiers in both the transmitting and receiving circuits.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification and any amendment thereto.

(b) Level of packaging and of packing required for shipment. (Level A, level B, or level C)

(c) The specific paragraphs of section 5 which are applicable to the particular procurement.

(d) Preproduction inspection:

(1) Two samples of each item are generally required so that lengthy environmental tests can be completed on one sample while complete performance measurements can be made on the second sample. (See 3.3)

(2) Preproduction pack(s) as follows:

a. Makeup of pack(s).
b. Number of each kind of pack to be submitted.
c. Inspection to be performed thereon-including rough handling test which will not be performed as procurement inspection.
d. Five copies of process sheet, using format shown on Drawing SC-C-33073, and accompanied by such drawings, sketches, and other data as may be necessary to completely describe the procedure followed in fabrication of the preproduction pack(s) and to identify the items therein. These data should be submitted to the contracting officer with the preproduction pack.
e. A packaging technician from the procuring agency will evaluate the preproduction pack(s).

(e) Marking and shipping of samples.

(f) Place of final inspection.

(g) Technical literature required. (See 3.11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:31Z
Check the source to verify that this is the current version before use.

(h) Quantity of running spare parts required. (See 3.11)

(i) Facsimiles required. (See 3.8)

(j) Submission of statement of treatment. (See 3.5.2.4.)

6.3 Nomenclature.- The parenthesis in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: TA-264W/PT. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.4 Location of operation inspection.- It is desirable that the operational inspection (4.7.3.) be performed at a location that will minimize handling (which might cause damage to the equipment) after this inspection is completed. It is recommended that the entire lot (including all previously inspected sample units) be sampled and inspected immediately prior to packaging.

6.5 Group C inspection.- Approval to ship may be withheld at the discretion of the Government pending the decision from the contracting officer on the adequacy of corrective action. (See 4.4.3.3.)

6.6 Definition of level B.- Level B packaging requirements detailed herein are designed to furnish protection against corrosion, deterioration, and physical damage during domestic shipments; covered storage for a period of three years or less; and distribution within the continental limits of the United States.

6.7 Inspection.- Inspection is the examination or testing, or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.

6.7.1 Examination.- Examination consists of simple, generally nondestructive, determinations of compliance without use of special testing equipment.

6.7.2 Testing.- Testing consists of determination of compliance using technical means.

6.8 Verification inspection.- The amount of verification inspection (by the Government) will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product and will normally be identified by the categories listed below:

(a) Type A.- The total of that inspection set forth in the Quality Assurance Provisions of this specification or the contract. Included in this category is that amount of inspection referred to as normal and tightened inspection by Military Standard MIL-STD-105.

(b) Type B.- That inspection set forth in the Quality Assurance Provisions of this specification or the contract reduced in amount under the reduced inspection provisions of Military Standard MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:31Z
Check the source to verify that this is the current version before use.

(c) Type C.- A reduced inspection procedure resulting in a material reduction in the amount of inspection set forth in the Quality Assurance Provisions of this specification. The amount of inspection is less than that provided for in type B and is based upon a consistently acceptable product resulting from a planned quality control system voluntarily employed by the contractor in the production of the product.

6.9 Color.- The color chip furnished by the procuring agency will match color chip No. 2430 for superseded Specification TT-C-595. No matching color chip has been provided in the superseding Federal Standard No. 595. (See 3.4.4.3)

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:31Z
Check the source to verify that this is the current version before use.

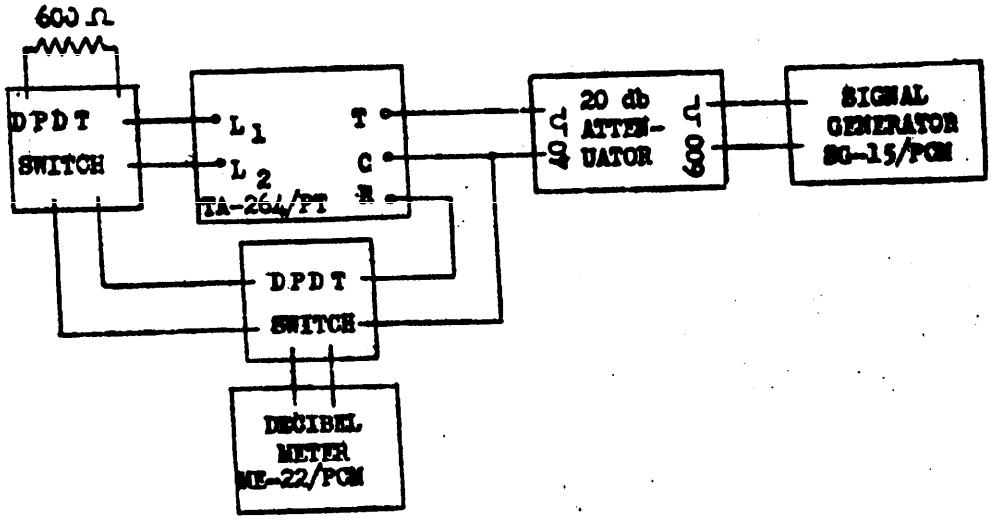


FIG. 1 - TEST EQUIPMENT SET-UP FOR MEASURING SIDETONE.

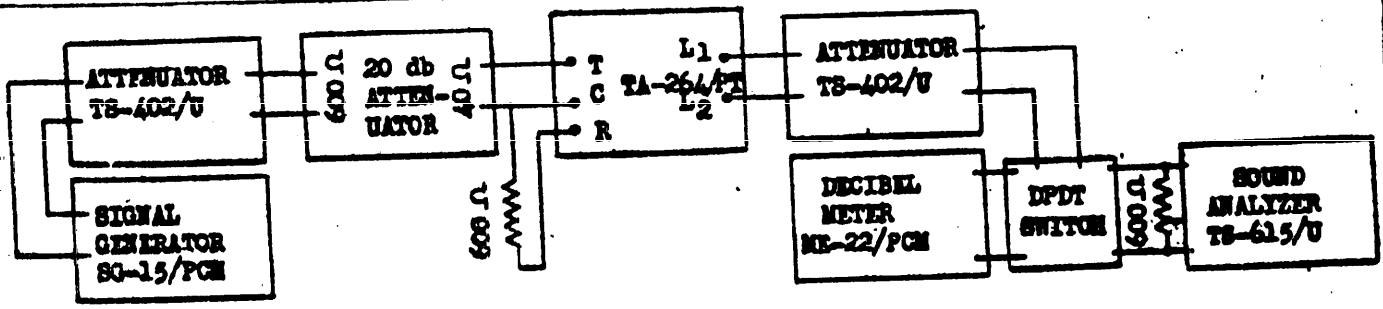


FIG. 2 - TEST EQUIPMENT SET-UP FOR MEASURING TRANSMITTING AMPLIFIER GAIN-LOAD CHARACTERISTICS.

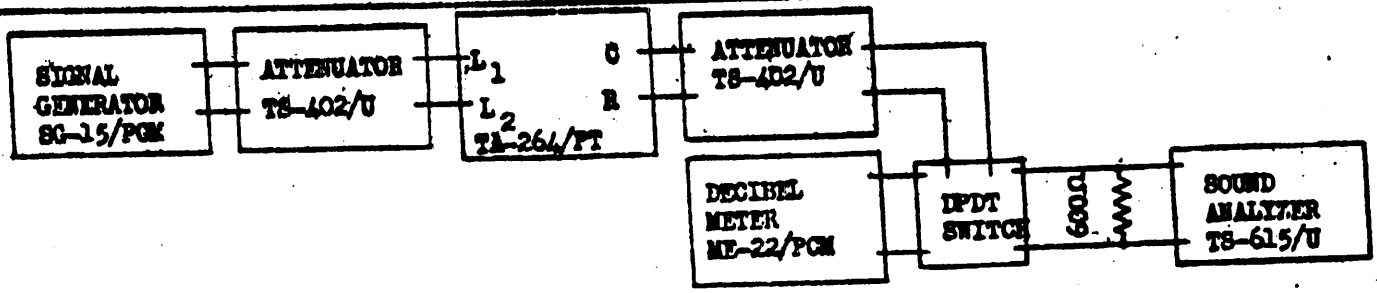


FIG. 3 - TEST EQUIPMENT SET-UP FOR MEASURING RECEIVING AMPLIFIER GAIN-LOAD CHARACTERISTICS.

Source: https://asist.dla.mil -- Downloaded: 202610-18T00:31Z
Check the source to verify that this is the currenversion before use.