MIL-G-16567C(MI)
1 October 1982
SUPERSEDING
MIL-G-16567B(SHIPS)
12 February 1973

MILITARY SPECIFICATION

GRIP, CABLE

This specification is approved for use by the US Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers strand mesh type grips used for gripping, pulling and supporting wire, cable and hose.

* 1.2 Classification. Grips shall be of the following types and classes, as specified (see 6.2):

Type I - Support = riser
  Class 2 - Standard
  Class 3 - Heavy duty
Type II - Support conduit - riser
  Class 1 - Light duty
Type III - End pull
  Class 1 - Light duty
  Class 2 - Standard
  Class 3 - Heavy duty
  Class 4 - Extra heavy duty
  Class 5 - End pull (shipboard)
  Class 6 - Light duty - non conductive
Type IV - Slack pull
  Class 2 - Standard
  Class 3 - Heavy duty


* 1.3 Military part number. The military part number shall consist of the letter M, the basic number of this specification, and dash numbers compiled from the characteristic codes:

Beneficial comments (Recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Missile Command, ATTN: DRSMI-RSDS, Redstone Arsenal, AL 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of the document or by letter.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

EXAMPLE:

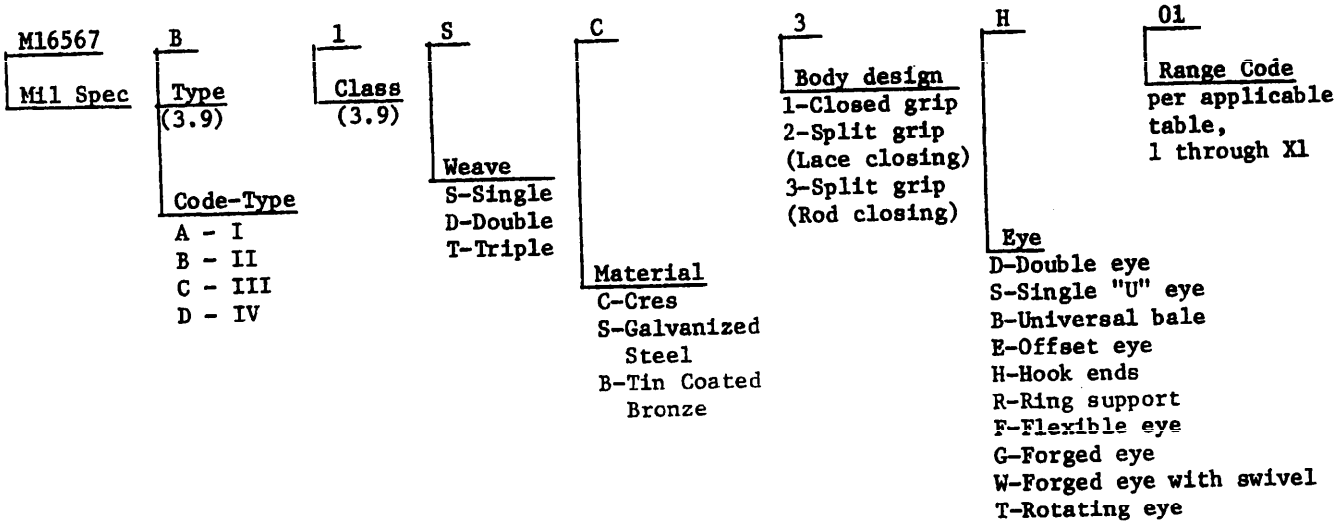

2. APPLICABLE DOCUMENTS

*2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

PPP-B-566	Box, Folding, Paperboard
PPP-B-601	Boxes, Wood, Cleated Plywood
PPP-B-621	Box, Wood, Nailed and Lock Corner
PPP-B-636	Box, Shipping, Fiberboard
QQ-S-763	Steel Bars, Wire Shapes, and Forgings, Corrosion-Resisting
QQ-W-423	Wire, Steel, Corrosion Resisting

Military

MIL-P-116	Preservation, Methods of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-1188	Commercial Packaging of Supplies and Equipment

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

AMERICAN IRON AND STEEL INSTITUTE (AISI)

Steel Products Manual-Wire and Rods, Carbon Steel-Drawn Galvanized Rope Wire.

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East Forty-Second Street, New York, NY 10017).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

* B33-74 - Tinned Soft or Annealed Copper Wire for Electrical Purposes.
* B105-80 - Hard Drawn Copper Alloy Wires for Electrical Conductors.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

* 3.1 First article. When specified, (see 6.2) a sample shall be subjected to first article inspection (see 4.2.1).

3.2 Illustrations. The illustrations shown herein are descriptive only and are not restrictive or intended to preclude the purchase of grips which are otherwise in accordance with this specification.

* 3.3 Material. All materials used in fabrication of cable grips shall be of a quality necessary to produce cable grips to meet the requirements specified herein. Cable grips shall be corrosion resisting steel, drawn galvanized (extra improved plow) steel, tin coated bronze and Aramid fibre, jacketed as specified (see 6.2).

* 3.3.1 Corrosion-resistant steel wire shall be in accordance with the requirements of QQ-W-423. Corrosion-resistant steel for type III grip components shall be in accordance with the requirements of QQ-S-763 and QQ-W-423. Drawn galvanized steel shall be in accordance with the requirements of AISI drawn galvanized rope wire and shall be zinc coated (galvanized) or otherwise treated to minimize corrosion. Tin coated bronze shall have the wire in accordance with the requirements of ASTM B105-80 and the tin coating in accordance with the requirements of ASTM B33-74. The Aramid fibre jacketed shall have the fibres stranded and shall be so coated or jacketed to prevent abrasion and weathering. It shall be nonconductive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

3.4 Design.

* 3.4.1 Body. All cable grips shall be designed so that eccentric loads will not be induced by the method of support or pull. The body (mesh) weave shall consist of a number of single strands and shall be designed to permit the pressure to be distributed evenly over the gripping area. The length of the body (mesh) shall be sufficient to provide for an instant and constant hold. The ends shall be connected in such a way that no sharp edges or ends endanger the workman or adjacent materials. No heat or solder shall be used when the grip is assembled except in non-load bearing areas. If the grip is designed for more than one cable size, it shall perform satisfactorily on all sizes within the design range. The grips shall be made as light as possible, consistent with the grips capacity and approximate breaking strength requirements specified herein. All grips shall be of such design that will prevent breakage or distortion from static or tensional loads specified in 4.5.1. Body length (at nominal diameter) variations may be plus or minus 20 percent of the dimension indicated for the type and class specified herein.

3.4.2 Node. The design of the node shall provide a uniform transition between the body and eye and shall prevent choking of the wire, cable or wire rope being held.

3.4.3 Eye. The eye design shall provide for a termination for supporting or pulling that will permit satisfactory performance of the grip. Eye length variations may be plus or minus 20 percent of the dimension indicated for the type and class specified herein.

* 3.4.4 Approximate Breaking Strength. Approximate breaking strength shall represent the average strength of new unused grips and shall have a minimum value of not less than 80 percent of the indicated value of the type and class specified herein when tested in accordance with 4.5.3.

* 3.4.4.1 Safety factor. A safety factor to assure performance should be used on the approximate breaking strength to establish a working load. For normal conditions with a new grip, a safety factor of five (5) for pulling grips and ten (10) for support grips may be used. When the application conditions are not well defined or when there is a higher risk of injury to persons or property involved, a greater safety factor should be used. All conditions of the application, including the condition of the grip (whether new or used), are to be evaluated before a safety factor is determined. Ultimately, the safety factor used is the responsibility of the user and his evaluation of the tensions involved.

3.5 Construction. Cable grips shall be free of any characteristics which will prevent the cable grip from conforming to the examination and tests specified in 4.4.1 and 4.5.

3.6 Surface finish. Surfaces shall be smooth and finished according to the manufacturer's standard practice.

* 3.7 Identification. Each cable grip shall be marked permanently and legibly when space permits with the manufacturer's part number and the range of sizes for which the grip is designed. The limiting size shall be given, such as 1.50 to 2.00.

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:13Z
Check the source to verify that this is the current version before use.

3.8 Magnetic permeability. When specified (see 6.2) cable grips of austenitic chrome nickel (corrosion-resisting) steel shall have a magnetic permeability of 2.0 or less after fabrication.

3.8.1 When specified in the contract or order corrosion-resisting steel grips shall be furnished for type I, class 2 and class 3, and type II, class 1.

* 3.9 Types and classes. Grips shall be of the types, classes and sizes specified in 3.9.1 through 3.9.11 as specified (see 1.2 and 6.2).

* 3.9.1 Type I, class 2. Type I, class 2 support-riser (standard-duty) grips shall be furnished single weave with single "U" eye, double eye, offset eye, universal bale or hook ending arms (see figure 1). Eye configuration shall be as specified (see 6.2). Unless otherwise specified in the contract or order, grip mesh shall be made of tin coated bronze strand.

3.9.1.1 Grips shall be closed or split, with stranded lace or metal rod (see figure 2), as specified (see 6.2).

* 3.9.1.2 Capacity, eye length, body length and approximate breaking strength shall be as shown in table I, and as specified (see 6.2).

* Table I - Support Grips (type I, class 2; standard).

Range Code	Capacity (diameter range)	Eye Length					Body Length	Approximate Breaking Strength				
		Single eye	Double eye	Offset eye	Univ. bale	Hook ends		Single eye	Double eye	Univ. bale	Offset eye	Hook ends
		Inches	Inches		Inches	Inches	Inches	In 100 pounds				
01	0.50 - 0.62	7	4		18	10	9	5			5	4.5
02	.63 - .74	8	4		18	10	9	8			8	7
03	.75 - .99	8	4		18	10	12	10			10	10
04	1.00 - 1.24	9	5		18	10	13	16			15	14
05	1.25 - 1.49	10	5		18	10	15	16			15	14
06	1.50 - 1.74	12	5		18	10	16	16			15	14
07	1.75 - 1.99	14	6		18	10	18	22			20	16
08	2.00 - 2.49	16	6		18	10	20	33			31	22
09	2.50 - 2.99	18	6		18	10	22	33			31	22
10	3.00 - 3.49	21	8.5		18	10	24	49			38	32
11	3.50 - 3.99	24	8.5		18	10	26	49			38	32

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:13Z
Check the source to verify that this is the current version before use.

* 3.9.2 Type I, class 3. Type I, class 3 support-risers (heavy duty) grips shall be furnished double weave with a single "U" eye or double eye (see figure 1) and shall be closed or split with stranded lace, as specified (see 6.2). Unless otherwise specified in the contract or order, grip mesh shall be made of tim coated bronze strand.

* 3.9.2.1 Capacity, eye length, body length and approximate breaking strength shall be as shown in table II, and as specified (see 6.2).

* Table II - Support Grips (type I, class 3).

Range Code	Capacity (diameter range)	Single eye	Double eye	Body Length	Approximate Breaking Strength
	Inches	Inches	Inches	Inches	In 100 pounds
01	0.75-0.99	10	10	25	28
02	1.00-1.24	10	10	28	43
03	1.25-1.49	10	10	30	43
04	1.50-1.99	10	10	34	43
05	2.00-2.49	--	10	36	81
06	2.50-2.99	--	10	38	81
07	3.00-3.49	--	10	40	101
08	3.50-3.99	--	10	44	121
09	4.00-4.49	--	10	46	121
10	4.50-4.99	--	10	68	121
11	5.00-5.99	--	10	72	141

* 3.9.3 Type II, class 1. Type II, class 1 support conduit-riser (light duty) grips shall be furnished with ring support (see figure 3) or hook ends (see figure 1), as specified (see 6.2). Single weave grips shall be closed or split with rod closing as specified (see 6.2). Double weave grips shall be closed or split with stranded lace, as specified (see 6.2). Unless otherwise specified in the contract or order, grip mesh shall be made of tin coated bronze strand.

* 3.9.3.1 Capacity, conduit size, body length and approximate breaking strength shall be as shown in table III and as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:13Z
Check the source to verify that this is the currentversion before use.

* Table III - Support conduit-riser (type II, class 1).

Range Code	Capacity (diameter range)	Conduit 1/ Size	Body Length	Approximate Breaking Strength in 100 pounds	
	Inches	Inches	Inches	Single Weave	Double Weave
01	0.75-1.00	1.25-6.00	13	6	9
02	1.00-1.25	1.50-6.00	13	9	12
03	1.25-1.50	2.00-6.00	14	9	12
04	1.50-1.75	2.50-6.00	15	9	12
05	1.75-2.00	2.50-6.00	16	12	15
06	2.00-2.50	3.00-6.00	18	18	24
07	2.50-3.00	3.50-6.00	19	18	24
08	3.00-3.50	4.00-6.00	21	23	30
09	3.50-4.00	4.50-6.00	22	23	30

1/ Conduit support rings shall be suitable for use with the following standard iron pipe size (IPS) conduit sizes, as specified (see 6.2): 1-1/4, 1-1/2, 2, 2-1/2, 3, 3-1/2, 4, 4-1/2, 5 and 6 inches.

3.9.4 Type III, class 1. Type III, class 1 end pull (light duty) grips for light pull electrical construction or light wiring and rewiring shall be furnished in single weave with a flexible eye (see figure 4). All grips shall have shoulders to protect the ends of the pulled cable. Unless otherwise specified in the contract or order mesh shall be made of galvanized steel strand.

* 3.9.4.1 Capacity, eye length, body length and approximate breaking strength shall be as shown in table IV and as specified (see 6.2).

Table IV - End pull grip (type III, class 1)

Range Code	Capacity (diameter range)	Eye Length	Body Length	Approximate Breaking Strength
	Inches	Inches	Inches	in 100 pounds
01	0.50-0.61	5	16	28
02	.62- .74	5	16	28
03	.75- .99	6	20	40
04	1.00-1.24	7	20	68
05	1.25-1.49	7	21	68
06	1.50-1.99	8	23	68
07	2.00-2.49	9	25	85
08	2.50-2.99	9	27	106
09	3.00-3.49	10	30	147
10	3.50-3.99	10	32	147

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* 3.9.5 Type III, class 2. Type III, class 2 end pull (standard duty) grips for power and communication cables and service lines into buildings shall be furnished in double weave with forged eye, forged eye with swivel, rotating eye, or flexible eye (see figures 4 and 5), as specified (see 6.2). All grips shall have shoulders to protect the end of the pulled cable. Unless otherwise specified in the contract or order grip mesh shall be made of galvanized steel strand.

* 3.9.5.1 Capacity, flexible and forged eye, eye and body length and approximate breaking strength shall be as shown in table V and as specified (see 6.2).

* Table V - End Pull Grips (type III, class 2)

Range Code	Capacity (diameter range)	Flexible Eye			Forged Eye			
		Eye Length	Body Length	Approximate Breaking Strength	Eye Dia.	Eye Length	Body Length	Approximate Breaking Strength
	Inches	Inches	Inches	in 100 pounds	Inches	Inches	Inches	in 100 pounds
01	0.50-0.61	--	--	--	.875	5	16	56
02	.62- .74	--	--	--	.875	5	16	68
03	.75- .99	9	36	68	1.00	6	32	96
04	1.00-1.49	9	36	96	1.375	7	33	164
05	1.50-1.99	11	36	164	1.375	7	34	164
06	2.00-2.49	12	36	185	1.625	9	36	272
07	2.50-2.99	12	36	245	1.875	10	38	330
08	3.00-3.49	14	36	245	1.875	10	39	410
09	3.50-3.99	14	40	310	1.875	10	41	480

* 3.9.6 Type III, Class 3. Type III, Class 3 end pull (heavy duty) grips for normal overhead transmission and distribution line stringing and for bare or insulated conductors shall be furnished in multiweave (single, double or triple) with forged eye, forged eye and swivel, or flexible eye (see figures 4 and 5), as specified (see 6.2). All grips shall have shoulders to protect the end of the cable. Grip mesh shall be made of galvanized steel strand.

* 3.9.6.1 Capacity, forged eye, flexible eye, body length and approximate breaking strength shall be as shown in table VI and as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* Table VI - End Pull Grips (type III, class 3)

Range Code	Capacity (diameter range)	Forged Eye		Flexible eye Length	Body Length	Approximate Breaking Strength
		Dia.	Length			
	Inches	Inches	Inches	Inches	Inches	in 100 pounds
01	0.25-0.29	.875	5	9	26	68
02	.50- .74	1.00	6	9	32	100
03	.75- .99	1.00	6	11	41	144
04	1.00-1.24	1.375	8	12	52	246
05	1.25-1.49	1.625	8	12	56	306
06	1.50-1.74	1.875	9	12	60	306
07	1.75-2.24	1.875	10	18	70	480

3.9.7 Type III, Class 4. Type III, class 4 end pull (extra heavy duty) grips for extra high strength overhead transmission line stringing, for bare and insulated conductors and for synthetic rope and wire rope shall be furnished in double weave with a flexible eye (see figure 4). All grips shall have shoulders to protect the end of the cable. Grip mesh shall be made of galvanized steel strand.

* 3.9.7.1 Grip capacity, flexible eye and body length and approximate breaking strength shall be as shown in table VII and as specified (see 6.2).

* Table VII End Pull Grips (type III, class 4)

Range Code	Capacity (diameter range)		Flexible Eye Length	Body Length	Approximate Breaking Strength
	Conductor	Rope			
	Inches	Inches	Inches	Inches	In 100 pounds
01	0.19-0.37	0.25-0.65	10	24	65
02	.38- .62	.50- .90	12	36	140
03	.63- .87	.75-1.10	13	48	200
04	.88-1.12	1.00-1.50	15	60	306
05	1.13-1.37	1.25-1.70	18	76	468
06	1.38-1.90	1.50-2.10	24	89	665

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

3.9.8 Type III, class 5. Type III, class 5 end pull (shipboard) grips for shipboard or towing cable and for alternate, constant and intermittent strain and wet and dry conditions shall be furnished double weave, closed or split with stranded lace, as specified (see 6.2) and with a single or double eye, as specified (see 6.2) Grips shall be made of corrosion resisting steel with a magnetic permeability of 2.0 or less after fabrication.

* 3.9.8.1 Capacity, eye and body length and approximate breaking strength shall be as shown in table VIII and as specified (see 6.2).

* Table VIII - End Pull Grips (type III, class 5).

Range Code	Capacity (diameter range)	Eye Length	Body Length	Approximate Breaking Strength
	Inches	Inches	Inches	In 100 pounds
01	1.25-1.50	15	50	70
02	2.00-2.25	18	59	130
03	2.75-3.00	18	59	130
04	1/ 5.00-5.50	18	70	200
05	1/ 7.00-8.00	18	81	300

1/ 5-inch through 8-inch capacity grips shall be equipped with double eye only.

* 3.9.9 Type III, class 6. Type III, Class 6 end pull (light duty-non-conductive) grips for light overhead distribution line stringing of insulated conductors in close proximity to energized lines or hardware shall be furnished in double weave with a flexible eye (see Figure 4). All grips shall have shoulders or a sleeve to protect the end of the cable. The grip mesh shall be made of aramid fibre, jacketed.

* 3.9.9.1 Capacity, eye length, body length and approximate breaking strength shall be as shown in Table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* Table IX - End Pull Grips (type III, class 6)

Range Code	Capacity (diameter range)	Eye Length	Body Length	Approximate Breaking Strength
	Inches	Inches	Inches	In 100 pounds
01	0.50-0.62	5.5	24	28
02	.63- .74	5.5	26	35
03	.75- .99	6.0	31	42
04	1.00-1.24	6.5	36	42
05	1.25-1.49	6.7	42	42

* 3.9.10 Type IV, class 2. Type IV, class 2 slackpull (standard duty) grips for removing cable from conduit and for pulling slack for final placing of new cable shall be furnished with offset flexible eye or ring (see figures 6 and 7) as specified in the contract or order. Offset flexible eye grips shall be double weave, closed or split mesh with stranded lace or single weave, split mesh with metal rod, as specified (see 6.2). Ring grips shall be triple weave, closed mesh or double weave, split mesh with rawhide lace, as specified (see 6.2). Grip mesh shall be made of galvanized steel strand.

* 3.9.10.1 Capacity, eye and body length and approximate breaking strength shall be as shown in Table X and as specified (see 6.2).

* Table X - Slack Pull Grips (type IV, class 2)

Range Code	Capacity (diameter range)	Offset Flexible Eye					Ring			
		Eye Length	Body Length	Approximate Breaking Strength			Eye Length	Body Length	Approximate Breaking Strength	
				Closed	Split	Split			Closed	Split
	Inches	Inches	Inches	In 100 pounds			Inches	Inches	In 100 pounds	
01	0.75-0.99	7	11	26	25	22	11	13	50	40
02	1.00-1.24	8	13.5	40	35	34	11	14	50	40
03	1.25-1.49	8	15	54	40	45	11	15	50	40
04	1.50-1.74	9	16	66	40	58	11	16	50	40
05	1.75-1.99	10	17	100	40	76	13	17	50	50
06	2.00-2.49	10	19	110	40	90	13	17	50	50
07	2.50-2.99	10	20	110	40	110	13	18	50	50
08	3.00-3.49	12	21	145	40	120	15	19	100	50
09	3.50-3.99	12	23	145	40	120	15	20	100	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* 3.9.11 Type IV, class 3. Type IV, class 3 slack, pull (heavy duty) grips for removing underground cable and for pulling slack for final placing of new cable shall be furnished double weave, closed or split mesh, with rawhide lace and with offset flexible eye (see figure 6) as specified (see 6.2). Grip mesh shall be made of galvanized steel strand.

* 3.9.11.1 Capacity, eye and body length and approximate breaking strength shall be as shown in table XI and as specified (see 6.2).

* Table XI - Slack End Pull Grips (type IV, class 3)

Range Code	Capacity (diameter range)	Eye Length	Body Length	Approximate Breaking Strength	
				Closed	Split
	Inches	Inches	Inches	In 100 pounds	
01	0.75-0.99	7	20	26	25
02	1.00-1.24	8	20	54	35
03	1.25-1.49	8	23	54	40
04	1.50-1.99	9	25	66	40
05	2.00-2.49	10	26	110	40
06	2.50-2.99	10	29	110	40
07	3.00-3.49	12	32	160	40
08	3.50-3.99	12	35	160	40

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

* a. First article inspection (see 4.2.1).

* b. Quality conformance inspection (see 4.4)

* 4.2.1 First Article. First Article tests shall be conducted at a location specified in the contract. First article tests shall consist of the examination specified in 4.4.1 and all tests of 4.5.

* 4.2.2 First Article sample. The manufacturer shall submit a cable grip of each type and class for which first Article testing is required.

4.3 Sampling for quality conformance inspection.

4.3.1 Lot. All cable grips of the same type and class presented at one time shall be considered a lot for purposes of quality conformance inspection.

4.3.2 Sample. A random sample of cable grips shall be selected from each lot in accordance with MIL-STD-105 at inspection level II for the inspection specified in 4.4.

4.4 Quality conformance inspection. Quality conformance inspection shall consist of the following:

(a) Examination (see 4.4.1).

(b) Test (see 4.4.2).

(c) Inspection of preservation, packaging, packing and marking for shipment and storage (see 4.6).

* 4.4.1 Examination. Each cable grip selected in accordance with 4.3.2 shall be examined to determine compliance with the requirements of this specification. Examination shall be conducted in accordance with table XII. Nonconforming cable grips shall not be offered for delivery and if the nonconforming cable grips in any one sample exceed the acceptance number for that sample, the lot represented shall be rejected.

* Table XII - Classification of Defects

Categories	Defects
Major 101	AQL 2.5 percent defective. Class, type, diameter range, body length (see 3.4.1), eye length (see 3.4.3), or magnetic permeability (see 3.8) not as specified.
Minor 201	AQL 4 percent defective. Identification not permanent or legible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

4.4.2 Tests for quality conformance. Samples selected in accordance with 4.3.2 shall be tested as specified in 4.5.1, 4.5.2 and 4.5.2.1 for compliance with the requirements of this specification. The acceptance quality level (AQL) shall be 2.5 percent defective. Nonconforming cable grips shall not be offered for delivery and, if the number of defective units exceeds the acceptable number for the samples tested, the lot represented by the sample shall be subject to rejection.

4.5 Tests.

4.5.1 Tensile test. The tensile tests specified in 4.5.2 and 4.5.3 shall be performed with new grips on metal rod having a nominal maximum diameter for the grip size tested. The inherent hardness of the metal rod, in addition to its low frictional characteristics, will not in all instances permit gripping of sufficient tightness to overcome slippage during the performance of a test. To readily conform to test requirements and provide for completion of the tests, a clamping or banding device is to be applied to the open end of the grip body (mesh) with sufficient force to prevent slippage.

* 4.5.2 The test shall be performed with a tensile load equal to 1/2 of the manufacturers stated approximate breaking strength. After 2 minutes of load, the load shall be released, the grip shall be removed and examined for frayed or broken strands or evidence of permanent distortion.

4.5.2.1 The test for type III, class 5 grips shall have the eye(s) at an angle of 15 degrees off the centerline and the load applied shall be held for 5 minutes at the load strength specified.

* 4.5.3 Approximate Breaking Strength test. After subjection to the performance test, specified in 4.5.2 the cable grip assembly shall be tensioned until breakage occurs. Approximate Breaking strengths shall be as specified in the table specified herein as applicable for the class and type cable grip tested and in accordance with 3.4.4.

4.6 Inspection for preparation for delivery. The packaging, packing and marking shall be inspected for compliance with section 5 of this document.

* 5. PACKAGING

* 5.1 Preservation. Packaging, packing, unitization, and marking shall be level A, B, or Industrial (see 6.2).

* 5.1.1 Level A. The Grip shall be packaged in accordance with MIL-P-116, Method III, utilizing containers conforming to PPP-B-636, Class weather resistant or PPP-B-566, Variety 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* 5.1.2 Level B. Same as level A.

* 5.1.3 Industrial. Preservation and packaging shall be in accordance with MIL-STD-1188.

* 5.2 Packing

* 5.2.1 Level A. The packaged Grips shall be packed in containers conforming to PPP-B-601, overseas type or PPP-B-621, Class 2, style 4.

* 5.2.2 Level B. Same as level A.

* 5.2.3 Industrial. The preserved Grips shall be packed in accordance with the requirements of MIL-STD-1188.

* 5.3 Marking

* 5.3.1 Levels A or B. Marking shall be in accordance with MIL-STD-129.

* 5.3.2 Industrial. Industrial marking shall be in accordance with the requirements of MIL-STD-1188.

6. NOTES

6.1 Intended use.

6.1.1 Type I, class 2 grips are used to absorb flexure and position variations and to support light cable weight.

6.1.2 Type I, class 3 grips have the same application as type I, class 2, except for heavier cable weight.

6.1.3 Type II, class 1 grips are used as a method of support for wire and cable, in vertical ducts and conduit.

* 6.1.4 Type III, classes 1, 2, 3, 4 and 6 grips are used to pull cable or synthetic fiber rope through conduits or overhead with various degrees of torque for light to extra heavy loading.

6.1.5 Type III, class 5 grips are used for shipboard use including towing of cable where cables are subject to alternate, constant and intermittant strain and wet or dry conditions.

* 6.1.6 Type IV, Classes 2 and 3 grips are used for pulling slack or removing cable in conduit. For standard and heavy loading.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Type and class required (see 1.2 and 3.9).

* (c) Capacity (diameter range) required (see 3.9.1.1, 3.9.2.1, 3.9.3.1, 3.9.4.1, 3.9.5.1, 3.9.6.1, 3.9.7.1, 3.9.8.1, 3.9.9.1, 3.9.10.1, 3.9.11.1(Tables I through XI).

* (d) Whether material shall be corrosion-resistant steel, galvanized steel, tin coated bronze or aramid fibre jacketed (see 3.3 and 3.8).

* (e) Type I grips. Specify eye configuration, closed or split mesh and lace method as applicable (see 3.9.1 and 3.9.2).

(f) Type II grips. Specify ring support or hook ends, single or double weave, closed or split mesh and lace method and conduit size (see 3.9.3).

* (g) Type III grips, classes 1 thru 4 and 6. Specify eye configuration and single or multiweave as applicable (see 3.9.4 thru 3.9.7 and 3.9.9).

(h) Type III, class 5 grips. Specify closed or split mesh and single or double eye (see 3.9.8).

* (i) Type IV grips. Specify flexible eye or ring, closed or split mesh, single or double weave and lace method as applicable (see 3.9.10 and 3.9.11).

(j) Levels of preservation, packaging, packing and marking required (see 5.1).

* (k) Military part number (see 1.3).

* (l) When first article is required (see 3.1).

* 6.3 Component description.

* 6.3.1 Body. The tubular open-braid (mesh) section of the grip.

* 6.3.2 Weave. The manner in which the body (mesh) of the grip is constructed. Single weave is one strand woven into a body (mesh). Double weave is two parallel adjacent strands woven into a body (mesh). Triple weave is three parallel adjacent strands woven into a body (mesh).

* 6.3.3 Closed. The closed grip is woven with no opening along the longitudinal axis of the body (mesh). It is used when end of the object is available for assembly (see figure 2A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* 6.3.4 Split. The split grip is woven with a longitudinal separation in the body (mesh). It is used when the end of the object is not available and can be opened and mounted (see figure 2B and 2C).

* 6.3.5 Node. Intermediate member or area joining together the body and the eye.

* 6.3.6 Braided stem. A node (area) at which the strand from the body (mesh) is woven into a prescribed braid for equalizing the loading and providing for the formation of the eye.

* 6.3.7 Strand equalizers. A node (member) made of tubular form which spaces the strand from the body (mesh) for equalizing the loading and providing for the formation of the eye.

* 6.3.8 Shoulder. A node (member) made of tubular form which provides for equalizing the loading and protecting the strands from abrasion.

* 6.3.9 Eye. The member of the grip which joins the grip to the supporting
* or pulling device.

* 6.3.10 Support riser grips. Support riser grips absorb flexure and variation and support cable weight.

* 6.3.11 Conduit riser grips. Conduit riser grips are used as a method of support for wire and cable, in ducts, conduit and similar applications (see figure 3).

* 6.3.12 Pulling grips. Pulling grips are used to pull cable, rope or wire rope.

* 6.3.13 End pull flexible eye. End pull flexible eye grip shall be as shown on figure 4.

* 6.3.14 End pull rotating forged eye. End pull rotating forged eye grip shall be as shown on figure 5.

* 6.3.15 Slack pull (ring type). Slack pull (ring type) used for pulling slack, positioning and removing cable shall be as shown on figure 7.

* 6.3.16 Slack pull (offset flexible eye). Slack pull (offset flexible eye) used for pulling slack, positioning, and removing cable shall be as shown on figure 6.

* 6.4 Subcontracted material and parts. The preparation for delivery requirements of referenced documents listed in section 2 do not apply when material and parts are procured by the supplier for incorporation into the equipment and lose their separate identity when the equipment is shipped.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* 6.5 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.


Custodian:
Army-MI

User Activity:
Army-GL

Preparing activity:
Army-MI

Project No. 5120-AB10


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

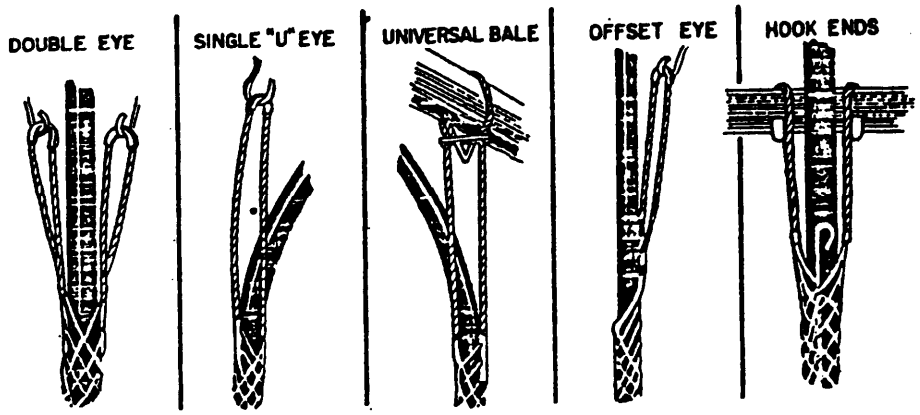

(See Note 1) (See Note 2) (See Note 3) (See Note 4) (see Note 5)

Figure 1 - Support riser.

NOTES:
1. Double eye is used where cable extends straight through grip without bending and where a double support is required.
2. Single eye is used where cable is vertical, where cable bends from vertical to horizontal, and where single support is required.
3. Universal bale is used where the support member is a pipe, beam, closed eye or continuous structural element.
4. Offset eye is used where a single offset support is required.
5. Hook ends type is used where cable extends straight through the grip and the support attachment is a steel plate.

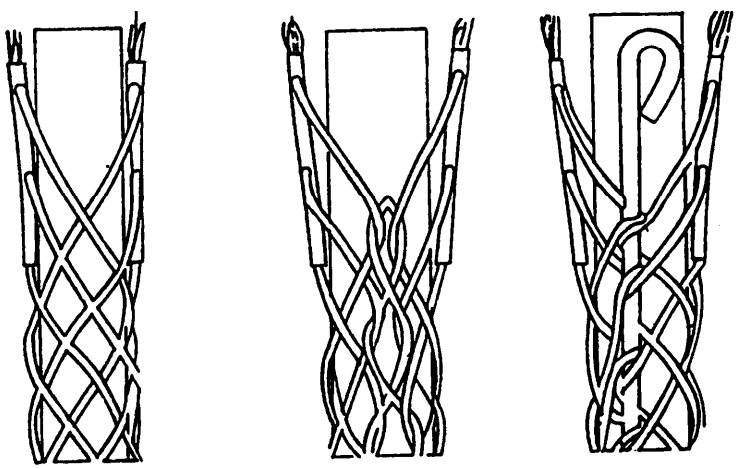

2A
Closed grip

2B
Split grip
(lace closing)

2C
Split grip
(rod closing)

Figure 2 - Grip, closed; split (lace closing) and split (rod closing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

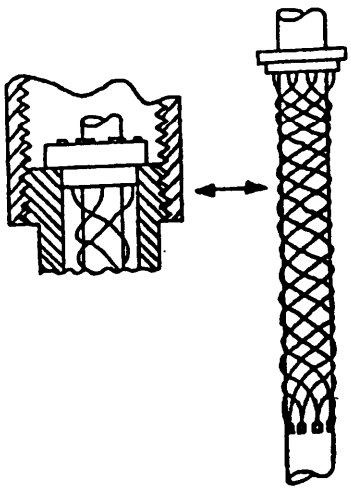


FIGURE 3 - CONDUIT RISER GRIP

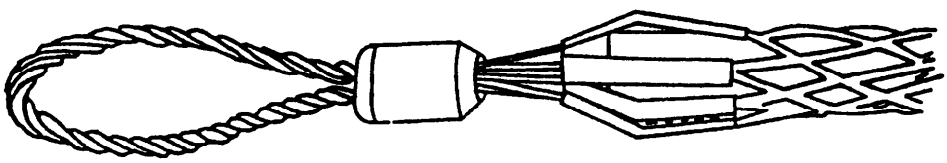


FIGURE 4 - FLEXIBLE EYE

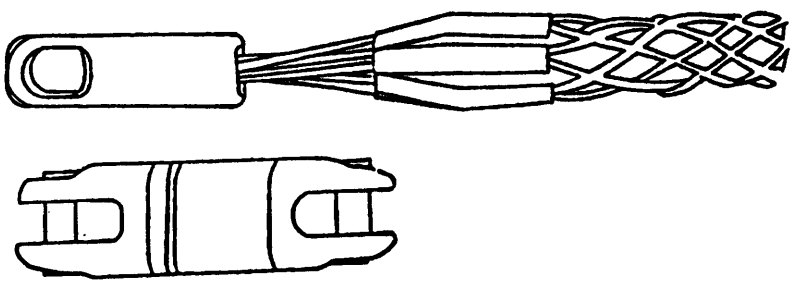


FIGURE 5 - FORGED EYE WITH SWIVEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

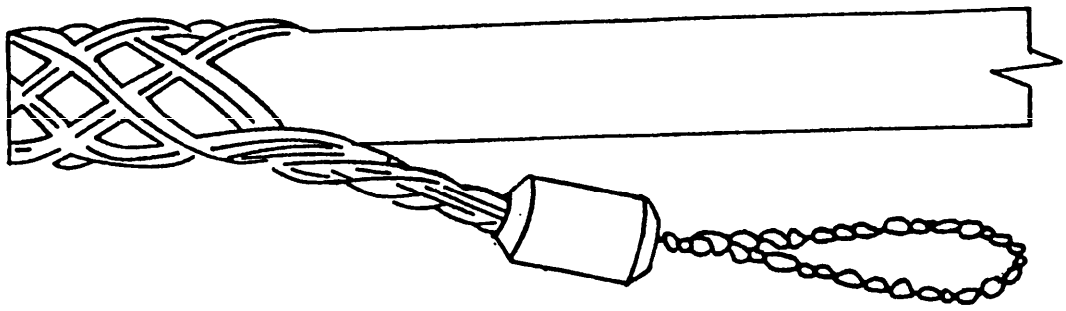


Figure 6 Slack pull, offset flexible eye.

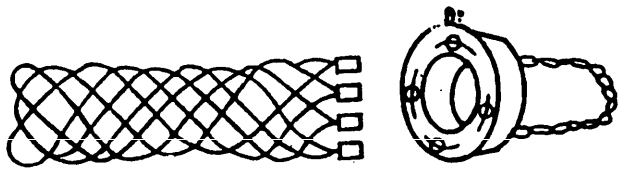


Figure 7 - Slack pull, ring type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
GRIP, CABLE MIL-G-16567C(MI)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Msl Cmd
Attn: DRSMI-RSDS
Redstone Aresenal, AL 35898

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.