INCH-POUND

MIL-S-16572F(NU)
23 January 1991
SUPERSEDING
MIL-S-16572E(NU)
21 June 1984

MILITARY SPECIFICATION

SHOULDER BOARDS AND INSIGNIA, BRANCH OF SERVICE

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for hard shoulder boards and sleeve devices worn by Navy personnel.

* 1.2 Classification. The shoulder boards and sleeve devices shall be of the following types, classes, and styles (see 6.2).

Type I	- Curved shoulder board - (Applicable to Classes 1, 2, 3, and 6)
Type II	- Flat shoulder board - (Applicable to Class 4)
Type III	- Curved shoulder board - (Applicable to Class 4)
Type IV	- Sleeve Devices - (Applicable to all classes)
Class 1	- Officers of Flag Rank
Class 2	- Commissioned Officers below Flag Rank
Class 3	- Commissioned Warrant and Warrant Officers
Class 4	- Naval Academy and Naval Reserve Officer Training Corps Midshipmen

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

Class 6 - Naval Aviation Cadets, Naval Aviation Officer Candidates, Naval Officer Candidates, Naval Reserve Officer Candidates, Navy Enlisted Dietitian Educational Program Candidates, Navy Enlisted Nurses Education Program Candidates and Navy Enlisted Scientific Education Program Candidates

Style - M (Men)
Style - W (Women)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

* A-A-50199	- Thread, Polyester Core; Cotton- or Polyester-Covered
V-T-276	- Thread, Cotton
CCC-C-438	- Cloth, Buckram, Woven and Nonwoven
PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-636	- Box, Shipping, Fiberboard
PPP-B-676	- Boxes, Setup

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-3461	- Button, Insignia, Metal, Uniform and Cap
MIL-F-10884	- Fasteners, Snap
MIL-C-16290	- Cloth, Melton, Wool (Moth Proofed)
MIL-L-17507	- Lace, Ornamental
MIL-E-17568	- Embroidery Materials, Metallic and Synthetic Metallic
MIL-C-82252	- Cloth, Broadcloth, Wool and Wool Synthetic (Moth Proofed)

STANDARDS

FEDERAL

FED-STD-151	- Metals; Test Methods
FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-2073-1	- DoD Materials Procedures Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of Federal and Military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. Postal Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

DRAWING

NAVY CLOTHING AND TEXTILE RESEARCH FACILITY
STITCH ENLARGEMENT DRAWING NUMBER 16-1-73

(Copies of Stitch Enlargements required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades For Sewing Threads

Standard Shades For Heraldic Yarns For Embroidery And Ribbons

(Applications for copies may be obtained from the Color Association of the United States, 343 Lexington Ave. New York, NY 10016-0927.)

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Method No. 8 - Colorfastness to Crocking: AATCC Crockmeter Method

(Applications for copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.1.1 Government loaned property. Hubs, when furnished by the Government, shall be used only for making the contractor's working dies. The contractor's sampling and embossing dies shall be tooled and polished to remove dents, scratches and all other imperfections.

3.1.2 Approved contractor sample. When hubs are not available, all requirements specified in the applicable specification sheet and as exhibited by the approved contractor's sample shall apply (see 6.4).

* 3.2 First article. When specified, (see 6.2), a sample shall be subjected to first article inspection, in accordance with 4.3.

3.3 Materials.

3.3.1 Base cloth. The cloth used for the sleeve device background and for covering the top surface of the shoulder boards shall conform to the requirements of type I, class 3, 16.5 oz., of MIL-C-82252 or type 1, class 2, 16.0 oz. of MIL-C-16290. The color shall match Blue 3346.

3.3.2 Cloth, lining. The cloth used for lining the underside of the shoulder boards shall conform to the requirements for classes 1, 2 or 3 of

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

MIL-C-368, or as an alternate, the underside may be lined with the top covering cloth specified in 3.3.1.

3.3.3 Lace, ornamental. The lace used for striping shall conform to the requirements for type II, classes 1 through 5, style A or type II, classes 1 through 5 style B, sub-style B2, of MIL-L-17507.

3.3.4 Nylon braid. The braid used for striping shall be 1/8 inch wide weighing 9.0 to 10.0 ounces per gross (144) yards. It shall be made of 2 ply mercerized cotton stuffer ends with an outer covering of nylon. The braid shall have one vellum consisting of 21 stuffer ends (minimum) with an additional 7 stuffer ends (minimum) on each side of the vellum. The outer covering shall completely cover the stuffer ends and shall be made with 8 carriers (minimum) with 2 ends of nylon per carrier. Testing shall be as specified in 4.4.1.

* 3.3.4.1 Color. The nylon braid shall be dyed shade Gold 3904, to approximately match the metallic embroidery material specified in 3.3.5. The use of sulphur dyes is prohibited.

* 3.3.4.1.1 Colorfastness. The dyed braid shall show colorfastness to light, crocking and wet-dry cleaning equal to or better than the standard sample when tested as specified in 4.4.1. As a limit of acceptability or when no standard sample is available, the braid shall show good fastness to light, crocking and wet-dry cleaning when tested as specified in 4.4.1.

* 3.3.5 Embroidery material (metallic). The metallic embroidery material shall conform to type III, classes 8 and 10 of MIL-E-17568.

3.3.6 Base Metal.

* 3.3.6.1 Anchor and star - Types II and III, class 4. The base metal used for the gold plated devices specified in 3.10.1.2 and 3.10.2.2. shall be either yellow brass or red brass. The yellow brass shall be of the following composition: 64% to 68% copper, remainder zinc, with a 0.35% (max.) of other elements. The red brass shall be composed as follows: 84% copper, remainder zinc, with a 0.25% (max.) of other elements. The brass base metal shall be free from pits, (including red oxide), dents, deep scratches, cracks, and foreign matter that will not be removed in subsequent processing. Testing shall be performed as specified in 4.4.1.

* 3.3.6.2 Star - Type I, class 6. The base metal used for the gold plated star device specified in 3.11.2 shall be made from a commercial quality copper base alloy. The finished insignia shall have a thickness of 0.020 ($\pm$ 0.001) inch. The brass base metal shall be roll polished, free from pits, dents, cracks, deep scratches, and foreign matter that will not be removed in subsequent processing. Testing shall be performed as specified in 4.4.1.

* 3.3.7 Gold-plated material. Gold for electroplating the anchor and star devices shall be 24 Karat (see 4.4.1).

* 3.3.7.1 Gold plating. Gold specified in 3.3.7 shall be used for the gold plating. Prior to plating, the metal insignia shall be cleaned of matter that

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

may affect the gold plating process. The plating shall be be non-porous and continuous over the entire surface. There shall be no cut through, blistering, peeling or flaking. The base metal shall be as specified in 3.3.6.1 and 3.3.6.2. No visible chemical reaction shall appear when tested as specified in 4.4.2.2.

* 3.3.7.1.1 Metal finish. The devices specified in 3.10.1.2 and 3.10.2.2, shall have a bright polished finish on the front and edges and be comparable to the color and finish of the guide sample (see 3.1). The gold plated star device specified in 3.3.6.2 shall have a satin finish.

3.3.8 Lacquer. The lacquer shall be a clear, pale, nonpigmented synthetic type. The dry lacquer film shall be continuous, level, adherent, and free from dust, lint, and other foreign inclusions. When tested as specified in 4.4.2.1, the tissue paper shall not adhere to the lacquered surface.

* 3.3.9 Thread, cotton. The cotton sewing thread shall be unbleached, type IA1, ticket No. 40, 3-ply; shade gold shall be type IA3, ticket No. 40, 3-ply; and shade black shall be type IC2, ticket No. 00, 3-ply, conforming to the requirements of V-T-276. The black thread shall approximate the shade of the lining material and the gold thread shall approximate the shade of the gold lace. As an alternate, the black and gold threads may be a cotton-covered polyester thread conforming to type I, ticket No. 50 or 70, 2-ply of A-A-50199.

* 3.3.10 Yarn, rayon. The rayon yarn used for highlights of the embroidered devices, when specified, shall be a continuous filament regenerated cellulose type dyed Scarlet C.A. No. 67111, Ultramarine Blue C.A. No. 67118, or Black HAN C.A. No. 67138, in accordance with the Department of Defense Standard Shades for Heraldic Yarns. The use of sulphur dyes is prohibited. Testing shall be performed as specified in 4.4.1.

* 3.3.10.1 Colorfastness. The yarn shall show fastness to light, laundering (3 cycles), wet-dry cleaning and perspiration equal to or better than the standard sample when tested as specified in 4.4.1. As a limit of acceptability or when no standard sample is available, the yarn shall show good fastness to light, laundering (3 cycles), wet-dry cleaning and perspiration when tested as specified in 4.4.1.

3.3.11 Fiberboard. The fiberboard shall be vulcanized fiber 0.060 ($\pm$ 0.005) inch in thickness when tested as specified in 4.4.1.

* 3.3.12 Paperboard. When needed, the paperboard used for backing the lining on the underside of the shoulder boards shall be of good commercial quality, free of sulphur (see 4.4.1), and of a color and thickness suitable for the purpose intended.

3.3.13 Buckram. The buckram used to reinforce the back of embroidered insignia shall conform to type III, class 1 of CCC-C-438. The color shall be natural, bleached, or black. Colorfastness requirements shall not apply.

3.3.14 Strap. The attachment strap shall be full grained leather .090 to .110 inch thick or flexible vinyl sheet .050 to .060 inch thick. The color of

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

the strap shall be black. Testing shall be as specified in 4.4.1.

3.3.15 Button, insignia, snap fastener style. Snap fastener components shall be brass conforming to style 2A (MS 27981) of MIL-F-10884 with a bright brass finish. The diameter of the socket and stud/eyelet components shall be 27/64 inch. The size of the insignia type button cap shall be 22-1/2 line. The design, material, and finish requirements for the button cap shall conform to type I, style 4, class A of MIL-B-3461.

3.3.16 Cement. The cement used for adhering the top covering and lining materials to the fiberboard base and paperboard backing shall be suitable for the purpose intended.

* 3.3.17 Attaching devices. The metal insignia specified in 3.10.1.2 and 3.10.2.2 shall be fitted with two nickel silver pin posts (see 4.4.1), 0.045 (+ 0.002) inch in diameter, 1/2 inch in length and hard soldered to the back of the insignia. The pin posts shall pass through the face fabric and pre-drilled holes of the fiberboard and then bent securely and parallel to the long direction of the fiberboard. The metal insignia specified in 3.11.2 shall have five (5) copper base alloy staples hard soldered near the tip of each ray, 1/16 (- 0, + 1/64) inch from the end. The staples shall pass through the face fabric and the five pre-drilled holes in the fiberboard, formed to the curvature of the shoulder board and clinched securely. Attached devices shall not separate from the shoulder board when pulled or gripped by slight hand pressure.

3.3.18 Hard solder. Hard solder shall be a silver alloy having a melting point of not less than 1075°F. Soldered joints shall not separate when tested as specified in 4.4.1.

3.4 Design. The shoulder boards shall be curved or flat pentagon shaped rigid boards covered with cloth. A snap fastner type insignia button shall be affixed to the pointed end. A tapered attachment strap or tunnel piece shall be attached to the underside of the board. The shoulder boards and background fabrics for the sleeve devices shall be embroidered or fitted with the appropriate insignia design in pairs and, when applicable, shall be produced in lefts and rights.

3.4.1 Figures. Figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern. All measurements indicated on figures are in inches. Figures are not drawn to scale and are for dimensions only.

3.5 Construction of shoulder boards.

3.5.1 Stitching operations. Machine stitching shall have a minimum of 8 stitches per inch using stitch type 301 of FED-STD-751. Sufficient top covering cloth shall be allowed in all directions for turning under edges. Hand stitching used for attaching the rayon lining and tunnel piece to the underside of the shoulder mark shall be a minimum of 6 stitches per inch.

3.5.2 Patterns. The patterns for the shoulder boards shall be furnished by the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

3.5.3 Fiberboard base. The fiberboard base specified in 3.3.11 shall be cut to shape with overall dimensions slightly less than those of the finished covered board. A 1/4 inch diameter hole for placement of button/socket snap fastener shall be drilled in the fiberboard base with the center of the hole positioned 5/8 inch in from the pointed end and centered across the width of the base. Fold under and cement edges of top covering material specified in 3.3.1 a minimum of 3/8 inch over edges of fiberboard base (see Figures 19, 20, and 21.

3.5.4 Lining preparation. Fold under and cement edges of the rayon lining approximately 3/8 inch over edges of the paperboard backing specified in 3.3.12.

3.5.5 Strap construction. When applicable, a strap made of one of the materials specified in 3.3.14 shall be centered between the sides of the prepared lining with the square end of strap parallel to and positioned 1/4 inch up from square end of lining. Stitch the square end of strap to lining with a 3/8 inch wide by 7/8 inch long box-stitch or cross-box-stitch. Position properly and attach the specified snap fastener stud to the narrow free end of tapered strap. Hand stitch all edges of preassembled lining to the underside of the shoulder mark with a minimum of 6 stitches per inch. The strap shall lie flat when fastened. Cut edges of a leather strap shall be stained black.

3.5.6 Tunnel construction. (Women commissioned officers only). When applicable, a tunnel piece shall be made by folding under and cementing the edges of the rayon lining material 3/8 inch over the edges of a properly sized and shaped piece of paperboard or buckram backing. The uncovered portion of the backing shall be completely covered by cementing a sufficiently sized rectangular piece of rayon lining over it. Each end of the tunnel piece shall then be stitched 1/16 inch from folded edge. The prepared tunnel piece shall then be superimposed on the face side of the prepared lining piece and both joined together by stitching the sides 1/16 inch gage from the folded edges, forming a tunnel. Align the preassembled tunnel/lining piece on the underside of the shoulder mark and hand stitch all outer edges with a minimum of 6 stitches per inch (see Figure 5).

3.5.7 Attachment of insignia.

* 3.5.7.1 Embroidery. Embroidered insignia devices for shoulder boards shall be hand or machine stitched thru face side of the top covering cloth employing the applicable yarn specified in 3.3.5. The embroidered device shall conform to the Government furnished guide sample (see 6.3) or the approved contractor's sample (see 6.4). Outlining of embroidered insignia devices with outlining stitching is prohibited. Embroidery shall be accomplished prior to the application of top covering cloth to fiberboard base. Sufficient top covering cloth shall be allowed in all directions for proper turn under and cementing.

3.5.7.2 Metallic. Metallic insignia shall be fastened to the shoulder board after the top covering cloth has been applied to the fiberboard base but prior to the attachment of lining.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

3.5.8 Attachment of stripes. The ends of the striping shall be folded to the underside of the shoulder board and either cemented down or tied together with hand stitching to help maintain their position during hand stitching of lining to board. The lining stitching shall catch the top covering cloth and lace striping.

3.5.9 Attachment of snap fastener. Attach metal insignia button snap fastener socket through top covering, the hole in fiberboard base and the lining. When used, the strap shall lie flat along the board when fastener is closed. The eagle's head of the insignia button for the type I shoulder board shall face left when the shoulder board is viewed with the pointed end upwards.

* 3.6 Dimensions. The dimensions of the finished shoulder boards shall be as shown in Table I and Figures 19, 20, and 21. All measurements are expressed in inches.

Table I - Dimensions of finished shoulder board

	Length			
	Overall	Peak	Width	Style
Type I, Style M	5-1/2	1	2-1/4	Curved-1/4 inch arc
Style W 1/	5	1	2-1/4	Curved-1/4 inch arc
Type II, Style M	5-1/2	1-1/8	1-3/4	Flat
Style W	4-1/2	1-1/8	1-3/4	Flat
Type III, Style M	5-1/2	1-1/8	1-3/4	Curved-3/16 inch arc
Style W	4-1/2	1-1/8	1-3/4	Curved-3/16 inch arc

1/ Except that class 6 shall be 5-1/2 inches in length

3.6.1 Dimensional tolerances. The overall dimensions of finished shoulder boards shall be as indicated in Figures 19, 20, and 21. Unless otherwise specified in this document dimensional tolerances shall be as follows:

Measurement	Tolerances in inches
Length of shoulder board	± 1/8
Width of shoulder board	± 1/16
Stripes	
Spacing between	± 1/16
Width	± 1/32
Design (stars, anchors, corps device)	
Overall size	± 1/16
Placement	± 1/16

3.7 Type I, class 1, shoulder board.

3.7.1 Face. The shoulder board shall consist of a 2 inch wide gold lace (see 3.3.3) superimposed and stitched to the applicable background cloth (see 3.3.1), with one row of stitching along each edge and approximately 1/16 inch from the edge of the lace (see Figure 1).

3.7.1.1 Anchor. A silver fouled anchor shall be embroidered on the gold lace and background cloth using materials specified in 3.3.5. Dimensions and location of the anchor shall be as shown in Figure 1. Design of the anchor shall be in accordance with the guide sample. The anchor shall be furnished

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

in lefts and rights. The unfolded anchor stock shall face towards the front of wearer.

* 3.7.1.2 Star(s) (Rank). Rank shall be designated by a 5 pointed star(s) with a French knot in the center, embroidered with silver embroidery materials specified in 3.3.5. Design, dimensions and location of the star(s) shall be as shown in Figures 1 and 2.

* 3.7.2 Corps devices. When applicable, the appropriate corps device shall be superimposed and embroidered on the middle of the anchor shank using gold and/or silver embroidery materials specified in 3.3.5 and rayon accent threads (see 3.3.10). Dimensions and color of the corps devices shall be as specified in 3.7.2.1 through 3.7.2.8.

3.7.2.1 Medical corps. Device shall be 15/16 inch long and 9/16 inch wide. The acorn shall be 1/4 inch long and width proportionate. The oak leaves shall be gold and the acorns silver. Stem of device shall be towards and perpendicular to the end of the shoulder board.

3.7.2.2 Supply corps. Device for the men shall be 1 inch long and 11/16 inch wide. Acorns to be 3/32 inch long and width proportionate. Oak leaves and acorns shall be gold (rights and lefts). Device for the women shall be 11/16 inch long and 1/2 inch in height.

3.7.2.3 Chaplain corps.

3.7.2.3.1 Christian. The long arm of the cross shall be 3/4 inch long and the short arm shall be 9/16 inch long. Width of each arm shall be 1/8 inch. The color shall be gold. The device shall be placed with the long arm inclined to the rear, forming a 60 degree angle with the end of the shoulder boards (lefts and rights).

3.7.2.3.2 Jewish. The overall height of the device shall be 1 inch, the height of the tablets shall be 3/4 inch and the width of the tablets shall be 3/4 inch. The diameter of the star shall be 1/4 inch. The color shall be gold with the center of the star Ultramarine Blue, Cable No. 67118, and the lettering Black, Cable No. 67138. The bottom of the tablets shall be positioned parallel to the end of the shoulder board.

3.7.2.4 Civil Engineer corps. Device shall be 1 inch long and 5/8 inch wide. The acorns shall be 3/16 inch long and width proportionate. Oak leaves shall be gold and acorns silver (lefts and rights).

3.7.2.5 Dental corps. Device shall be 15/16 inch high and 9/16 inch wide. Acorns to be 1/8 inch long and width proportionate. Oak leaves shall be gold and acorns silver.

3.7.2.6 Nurse corps. Device for women shall be 1/2 inch wide and 11/16 inch in height. The color of the oak leaf shall be gold.

* 3.7.2.7 Medical Service corps. Device shall be 1 inch high and 9/16 inch wide. Twig shall be 1/2 inch long and 1/8 inch wide and inclined to the rear forming a 15 degree angle from the horizontal. Lower end of twig shall point

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

to the front. Color shall be gold (lefts and rights).

* 3.7.2.8 Judge Advocate General's corps. Device shall be 15/16 inch wide and 5/8 inch high. Oak leaves shall be gold and balance of device shall be silver. Longer dimensions shall be parallel to the end of the shoulder board.

3.8 Type I, Class 2.

3.8.1 Face. The shoulder board shall be covered with the applicable background cloth specified in 3.3.1.

3.8.2 Rank (Stripes). The gold lace (see 3.3.3) shall be superimposed on the background cloth. The stripes shall be cut of sufficient length to overlap the backside of the board and be covered by the lining. The position, number, width, and spacing of stripes shall be as shown in Figures 3, 4, 5, and 6.

3.8.3 Line and Corps devices. The appropriate Line or Corps device shall be embroidered on the applicable background cloth with gold and/or silver embroidery materials specified in 3.3.5 and rayon accent yarns. Size of the device shall be as shown in Figures 13 through 18. Design of the device shall be in accordance with the guide sample and shall be furnished in lefts and rights as applicable.

3.9 Type I, Class 3.

3.9.1 Face. The shoulder board shall be covered with the applicable background cloth specified in 3.3.1.

3.9.2 Gold lace. A single stripe of gold lace shall be superimposed on the background cloth. The stripes shall be cut of sufficient length to overlap the backside of the board and be covered by the lining. The lace shall conform to type II, classes 1,2, 3, 4, or 5, style B, substyle B2 of MIL-L-17507. Position, width, and number of blue color breaks of the lace shall be shown in Figure 7.

3.9.3 Line and Corps devices. The appropriate line or corps devices (see Figures 13 through 18) shall be embroidered with gold and/or silver embroidery materials specified in 3.3.5 and rayon accent yarns as applicable. Location of the device in relation to the stripe shall be as shown in Figure 7 and in accordance with the guide sample.

3.10 Type II or III, Class 4.

3.10.1 Class mark.

3.10.1.1 Face. The shoulder board shall be covered with the applicable background cloth specified in 3.3.1.

3.10.1.2 Anchor. A gold metallic fouled anchor made of material specified in 3.3.6 shall be affixed to the covered shoulder board and located as specified in Figure 8. Design and dimensions of the anchor shall be the same as that extracted from the Government hub. The device shall be furnished in lefts and rights.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

3.10.1.3 Stripes. Stripes shall be of the braid material specified in 3.3.4 and shall be superimposed on the background cloth. The braid shall be cut of sufficient length to overlap the backside of the board and be covered by the lining. The number, location, and arrangement of stripes shall be as shown in Figures 8 and 9.

3.10.2 Rank Mark.

3.10.2.1 Face. The face of the shoulder board shall be as specified in 3.10.1.1.

3.10.2.2 Star. A five-pointed gold metallic star made of material specified in 3.3.6 shall be properly positioned and affixed to the covered board. Design and dimensions of the star shall be the same as extracted from the Government hubs. Location of the star shall be as shown in Figure 10.

3.10.2.3 Stripes. Stripes shall be of the braid material specified in 3.3.4 and superimposed on the cloth covered board. The braid shall be cut of sufficient length for the ends to overlap the underside of the board and be covered by the lining. The number and location of the stripes shall be as shown in Figures 10 and 11.

3.11 Type I, Class 6.

3.11.1 Face. The shoulder board shall be covered with the applicable background cloth specified in 3.3.1.

* 3.11.2 Star. The gold star shall be made of the metallic material specified in 3.3.6.2 and shall be of a size and design as extracted from the Government hub and Drawing number 16-1-73. The spangled component shall be superimposed over the basic star design and securely clinched inward (see Figure 12 and Drawing number 16-1-73.

3.12 Type IV, sleeve devices, all classes (unless otherwise specified).

* 3.12.1 Embroidery. Embroidered insignia devices for the sleeve shall be hand or machine stitched to the applicable background cloth specified in 3.3.1 using the applicable yarn specified in 3.3.5. The finished embroidered design shall conform to the Government furnished guide sample (6.3) or the approved contractor's sample (see 6.4). Outlining of embroidered insignia devices with outlining stitching is prohibited. The finished height and width measurements for the embroidered design itself shall be as indicated in Figures 13 through 18. The sleeve devices shall be embroidered in men's sizes only.

3.12.2 Spacing. All embroidered insignia covered by this specification shall be centered on the cloth patch. There shall be a minimum of 1/4 inch between the outer edges of the embroidered design and the finished cut or folded edge of the cloth patch. Embroidered insignia shall be cut to the proper size. No folding under of outer edges is required. Unless otherwise specified, a minimum of 1 inch shall be allowed between the outer edges of the embroidered design and the cut edges for hemming purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

3.13 Workmanship. The finished shoulder boards and sleeve devices shall conform to the quality established by the specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.3.1 and 4.4.3.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

* 4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on components and materials listed in Table II. All test reports shall contain the individual values utilized in expressing the final result. The lot shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

be unacceptable if one or more sample units fail to meet any requirement specified. The sample size shall be as follows:

Lot Size	Sample Size
800 or less	2
801 through 22,000	3
22,001 and over	5

Table II - Testing of components

Component	Characteristic	Requirement paragraph	Test method	Sample unit	Determinations per sample unit	Results reported as
Base metal (as applicable 1 lb.)	Chemical composition	3.3.6.1	FED-STD-151 Method 111 or 112	4 oz. composite	2	Nearest 0.1% alloy each element
Copper base alloy	Chemical composition 2/	3.3.6.2	-	-	-	-
Rayon yarn	Material ident 2/	3.3.10	1500 or 1520	50 yds.	1	Pass or fail
	Color 2/	3.3.10	Visual		1	Pass or fail
	Presence of Sulphur 2/	3.3.10	2020		1	Pass or Fail
	Colorfastness to:					
	Light	3.3.10.1	5660		1	Rating
	Laundering (3 cycles)	3.3.10.1	5610		1	Rating
	Perspiration	3.3.10.1	5680		1	Rating
	Wet/dry cleaning	3.3.10.1	5622		1	Rating
Nylon braid	Material ident 2/	3.3.4	1500 or 1520	50 yds.	1	Pass or fail
	Width	3.3.4	5020		6	Avg. to nearest 1/32 in.
	Weight	3.3.4	4.4.5		6	Avg. to nearest 0.5 oz.
	Stuffer ends	3.3.4	Visual		1	Pass or Fail
	No. of carriers	3.3.4	Visual		1	Pass or Fail
	Ends per carrier	3.3.4	Visual		1	Pass or Fail
	No. of vellum	3.3.4	Visual		1	Pass or Fail
	Color 2/	3.3.4.1	Visual		1	Pass or fail
	Presence of Sulphur 2/	3.3.4.1	2020		1	Pass or Fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

Table II - Testing of components (cont'd)

Component	Characteristic	Requirement paragraph	Test method	Sample unit	Determinations per sample unit	Results reported as
Nylon braid (cont'd)	Colorfastness to:					
	Light	3.3.4.1.1	5660		1	Rating
	Crocking	3.3.4.1.1	5651		1	Rating
	Wet/dry cleaning	3.3.4.1.1	5622		1	Rating
Gold plating	Acid resistance	3.3.7.1	4.4.2.2	1 gold plated device (not lacquered)	-	-
Lacquer	Tackiness	3.3.8	4.4.2.1 1/	2 metal devices	-	-
Fiber-board	Thickness	3.3.11 2/	-	-	-	-
Paper-board	Presence of sulphur	3.3.12 2/	-	-	-	-
Strap	Color and thickness	3.3.14 2/	-	-	-	-
Attaching devices	Material ident	3.3.17 2/	-	-	-	-
Hard solder	Material ident	3.3.18 2/	-	-	-	-

1/ One determination per sample unit and the results reported as "pass" or "fail".

2/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

* 4.4.2 Testing of the end item.

4.4.2.1 Tackiness test. A piece of tissue paper shall be pressed against the finished lacquered metal device under test at room temperature (60° to 80° F) for 15 seconds with any pressure capable of being exerted by the thumb and two fingers. At the completion of 15 seconds, the finger pressure shall be released with the insignia inspected to determine compliance with 3.3.8.

4.4.2.2 Acid test for gold plating. The test acid shall be applied as follows: At room temperature place a drop of test acid (each drop to be 1/8 inch minimum diameter) on three different spots on the gold plated surface of the face of the insignia. Allow the drops to remain for not less than 1 minute. During this time examine the surface to determine compliance with 3.3.7.1. The test acid applied at room temperature shall consist of a solution containing 50 percent by volume of CP nitric acid (specific gravity 1.42) and an equal volume of distilled water. The test shall be performed on insignia prior to lacquering or after the lacquer has been completely removed with an organic solvent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of the end item. Examination of the end item shall be in accordance with 4.4.3.1 and 4.4.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.3.3. The sample unit shall be one finished pair (left and right) of shoulder boards or one finished pair of sleeve devices (left and right). The lot size shall be expressed in units of pairs of shoulder boards or pairs of sleeve devices.

4.4.3.1 Visual examination. The shoulder boards and sleeve devices shall be examined for defects in color, design, material, construction, workmanship, and the defects classified in accordance with Table III.

Table III - Classification of defects

Examine	Defect	Classification Major	Minor
I Fabrics	1. Hole, cut, tear, or misweave	X	
	2. Color or material not as specified	X	
	3. Spot or stain		X
	4. Covering not cemented to fiberboard base		X
	5. Overlap less than 3/8 inch	X	
II Stripes (Lace and Braid)	1. Any scuffed or abraded area	X	
	2. Stain or spot		X
	3. Type, color or pattern not as specified	X	
	4. Spacing or number of stripes not as specified	X	
	5. Incorrect width		X
	6. Material not as specified		X
III Strap or Tunnel Piece	1. Missing	X	
	2. Wrong shape		X
	3. Dimensions not as specified		X
	4. Snap fastener stud missing on strap	X	
	5. Strap does not lie flat in closed position		X
	6. Not stitched to lining as specified		X
	7. Strap not centered	X	
	8. Any cut or deep scratch in strap		X
	9. Cut edges of strap not stained (when applicable)		X
	10. Strap not specified thickness		X
	11. Not specified material	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

Table III - Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
IV Button and snap fastener	1. Style, type, or size not as specified	X	
	2. Not facing direction specified		X
	3. Any part missing or discolored	X	
	4. Scratched or dented		X
	5. Snap does not align with socket on board	X	
	6. Does not function properly	X	
V Metal insignia	1. Anchor size not as specified		X
	2. Incorrect size or design of stars	X	
	3. Gold plating or lacquer missing	X	
	4. Foreign matter in lacquer film		X
	5. Scratches, dents, pits, or cracks	X	
	6. Plating or lacquer blistered, flaking or peeling	X	
	7. Finish and color not as specified		X
	8. Double struck	X	
	9. Rough edges		X
	10. Not trimmed or not formed properly		X
VI Embroidered design	1. Any deviation from guide sample or approved contractor sample	X	
	2. Any design incorrect or missing	X	
	3. Poorly defined, distorted or misshaped	X	
	4. Unrelated colors or yarn visible on face		X
	5. Surface yarns loose, tight or shifted	X	
	6. Bunched, kinked or tangled yarns on face	X	
	7. Finished height or width of design not as specified		X
	8. Edge of design less than 1/4 inch from finished cut or folded edge of cloth patch		X
	9. Placement of star, anchor or device not as specified		X
	10. Wrong combination of stars, stripes, anchor and devices	X	
VII Stitching	1. Any component part or device not securely attached or stitched		X
	2. Hand stitching, less than 5 stitches per inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

Table III - Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
VII Stitching (cont'd)	3. Machine stitching, less than 7 stitches per inch		X
	4. Broken or missing stitches		X
	5. Loose or tight tension, affecting appearance	X	
	6. Stitch lines crooked or irregular, affecting appearance		X
	7. Thread not a good match to face fabric or gold lace		X
	8. Stitching runoff		X

4.4.3.2 Dimensional and pairing examination. The pairs of shoulder boards and sleeve devices shall be examined for defects in accordance with the following:

(a) Any measurement deviating from the nominal dimensions and tolerances specified for the finished shoulder boards and sleeve devices in 3.6, 3.6.1, and applicable figure shall be scored as a defect.

(b) Any pair of shoulder boards or sleeve devices not furnished with one "right" and one "left", when applicable, shall be scored as a defect.

(c) A poor color match of synthetic metallic yarn between paired shoulder boards or sleeve devices shall be scored as a defect.

4.4.3.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual, dimensional, and pairing examinations shall be as follows:

	Inspection Level	AQL Major	Total
For visual examination in 4.4.3.1	II	2.5	6.5
For dimensional examination in 4.4.3.2	S-1	(one class)	6.5
For pairing examintion in 4.4.3.2	S-4	(one class)	1.5

* 4.4.4 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, not as specified or damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling, bulging or distortion of containers.
Content	Number of items per container is more or less than specified; wrong type, class or style per set-up box; number of set-up boxes per shipping container more or less than specified. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A.

* 5.1.1.1 Shoulder boards. Each pair of shoulder boards shall be placed in a close fitting, flat style, clear polyethylene film bag (see 5.1.1.3). Each bag, with a pair of shoulder boards, shall be preserved in a tuck end type folding paperboard box conforming to variety 1, style II, type D, class a of PPP-B-566. The box shall measure approximately 5-3/4 inches long by 2-5/8 inches wide by 1-1/4 inches in depth.

5.1.1.2 Sleeve devices. Each pair of sleeve devices shall be packaged in a close fitting, flat style, clear polyethylene film bag (see 5.1.1.3). The open end of the bag may be heat sealed or folded over. One hundred-twenty (120) pairs of sleeve devices of one kind only shall be packaged in a snug fitting set-up box that conforms to type I or II, variety 1, any class or style of PPP-B-676.

* 5.1.1.3 Bags, polyethylene. The polyethylene bags shall be fabricated from clean polyethylene film 0.0010 inch thick (± 20% tolerance). The bags shall be formed with heat-sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bags may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required, and the final closure of the bag shall be made with the flap tucked in or reversed.

* 5.1.2 Level C. Insignia shall be preserved to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The contractor's standard practice may be used when it meets this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

* 5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A. 100 pairs of shoulder boards or 50 set-up boxes of sleeve devices, preserved as specified in 5.1.1, shall be packed in a snug fitting fiberboard shipping container conforming to type CF, class weather-resistant, variety DW, grade V15c, style RSC of PPP-B-636. Shipping containers shall be closed in accordance with the appendix of the box specification.

* 5.2.2 Level B. 100 pairs of shoulder boards or 50 set-up boxes of sleeve devices, preserved as specified in 5.1.1, shall be packed in a snug fitting fiberboard shipping container conforming to type CF, class domestic, variety DW, grade V15c, style RSC of PPP-B-636. Shipping containers shall be closed in accordance with the appendix of the box specification.

* 5.2.3 Level C. Item, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs and intermediate or exterior containers shall be marked in accordance with MIL-STD-129.

* 5.4 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

* 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

* 6.1 Intended use. The shoulder boards and sleeve devices covered by this specification are intended for wear by Naval Officers and Naval Academy personnel.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Type, class, and style required (see 1.2).
d. When first article inspection is required, (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

f. When all packaging data is to be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

* 6.3 Guide samples and Government loaned hubs. For access to guide samples or Government loaned hubs, address the procuring activity issuing the invitation for bids or Officer in Charge, Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001.

* 6.4 Approved contractor sample. A contractor submitting a sample for Government approval shall forward the sample to the Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.

Blue, 3346
Devices, sleeve
Devices, hard
Gold, 3904


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8455-N467

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

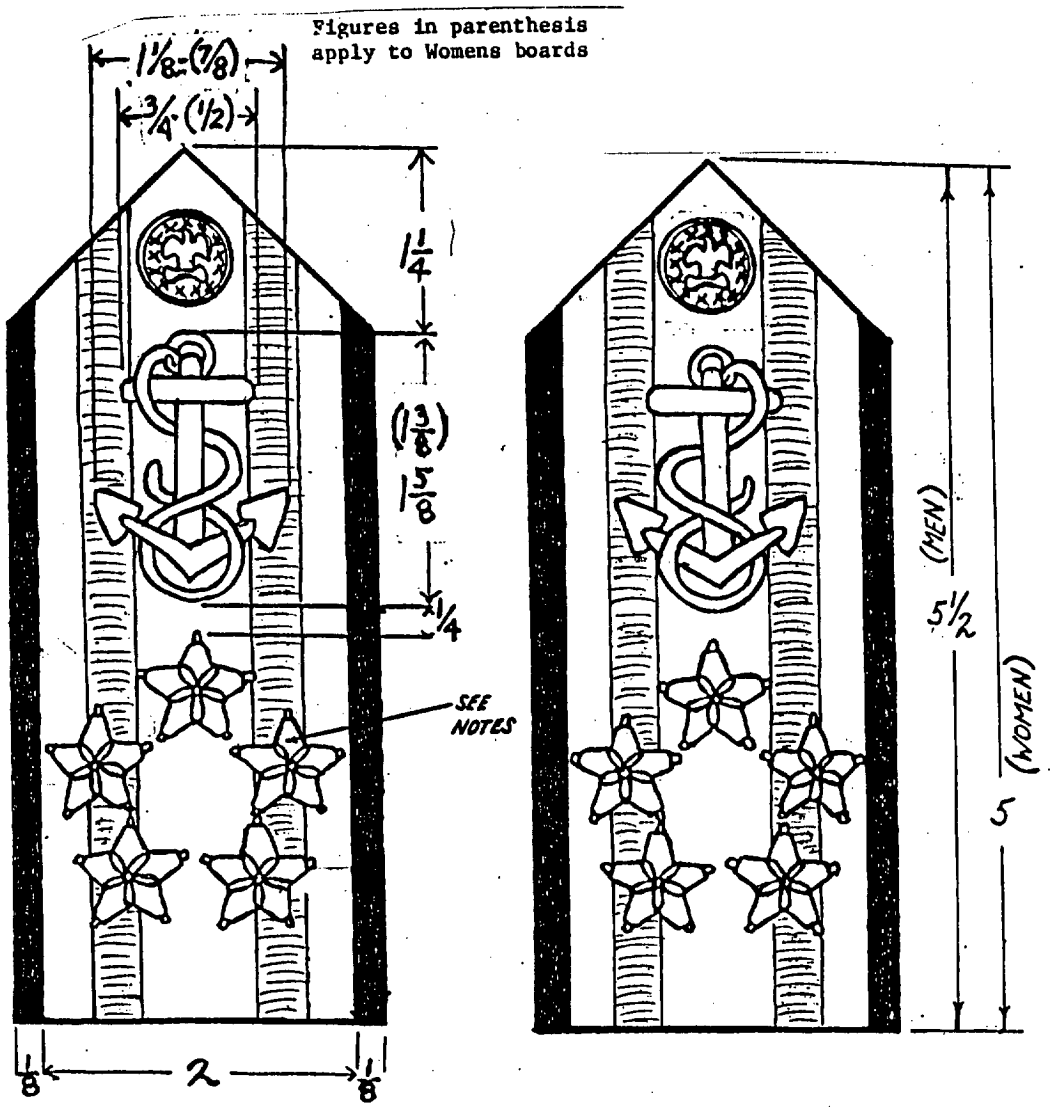

Fleet Admiral (Line)

Notes: 1. Staff Corps Devices shall be superimposed on the Anchor Shank.
2. Unfouled anchor stock shall face towards front of wearer.
3. The diameter of stars shall be 3/4 inch for men's boards and 5/8 inch for women's boards.

Figure 1 - Shoulder boards, type I, class 1, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.


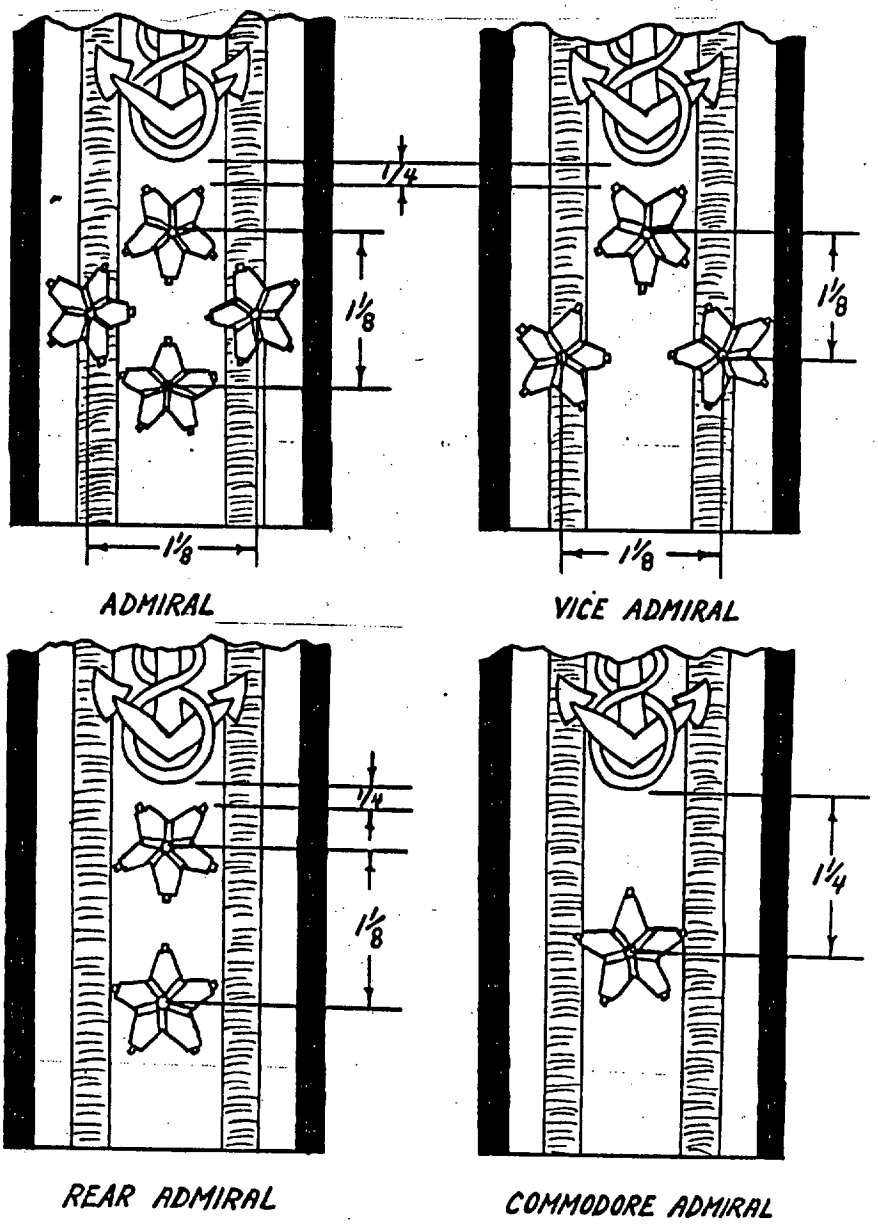


Figure 2 - Shoulder boards, type I, class 1, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

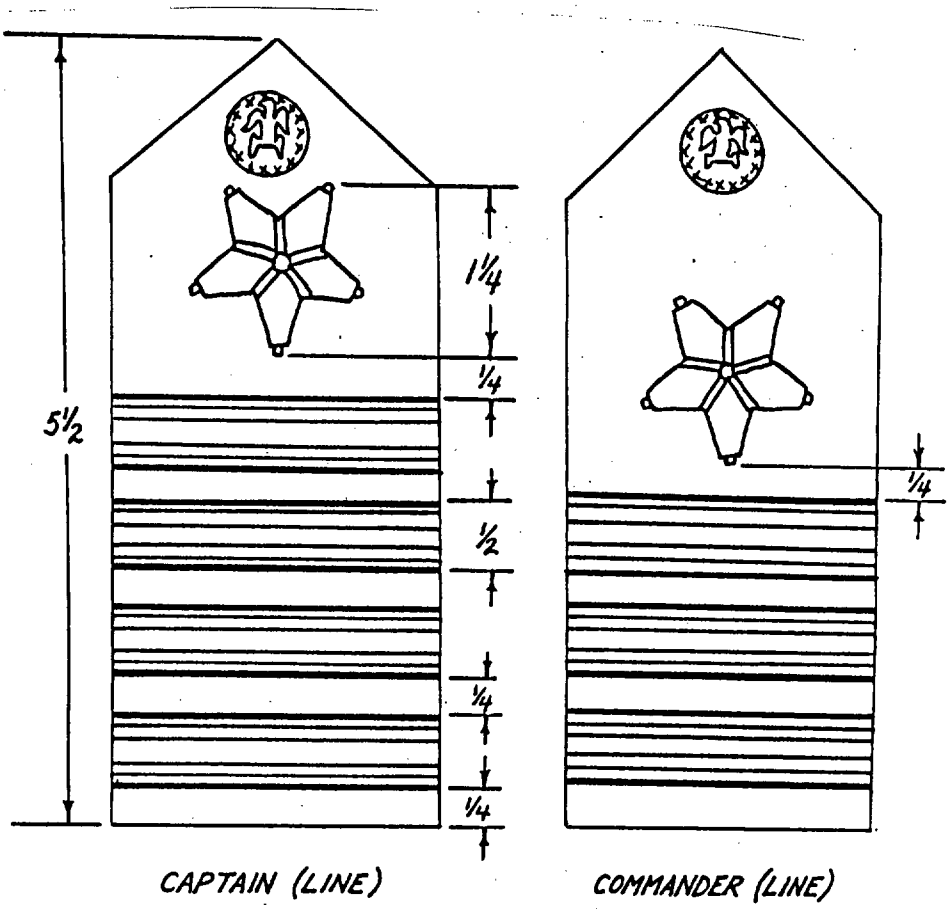

NOTE: STAFF CORPS DEVICE USED IN LIEU OF STAR, WHEN APPLICABLE

Figure 3 - Shoulder boards, type I, class 2, style M

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.


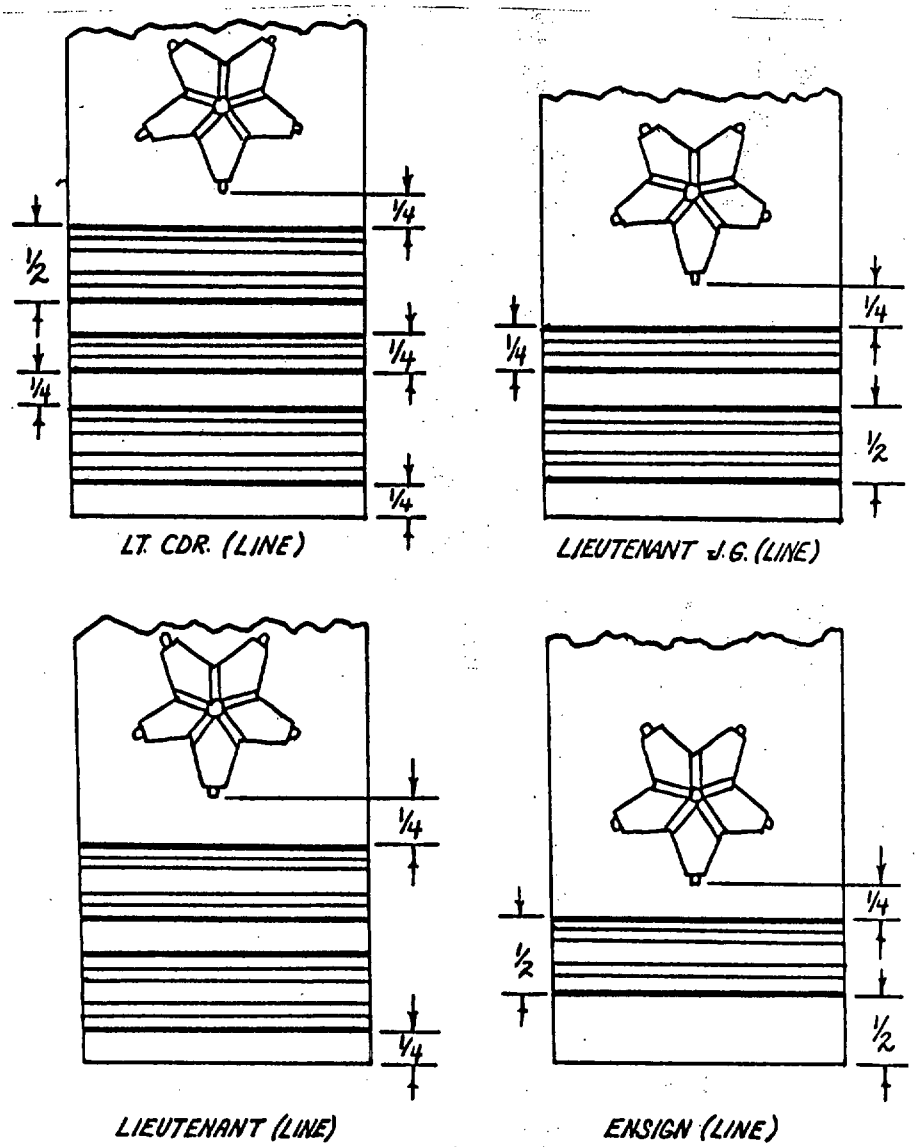


Figure 4 - Shoulder boards, type I, class 2, style M

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

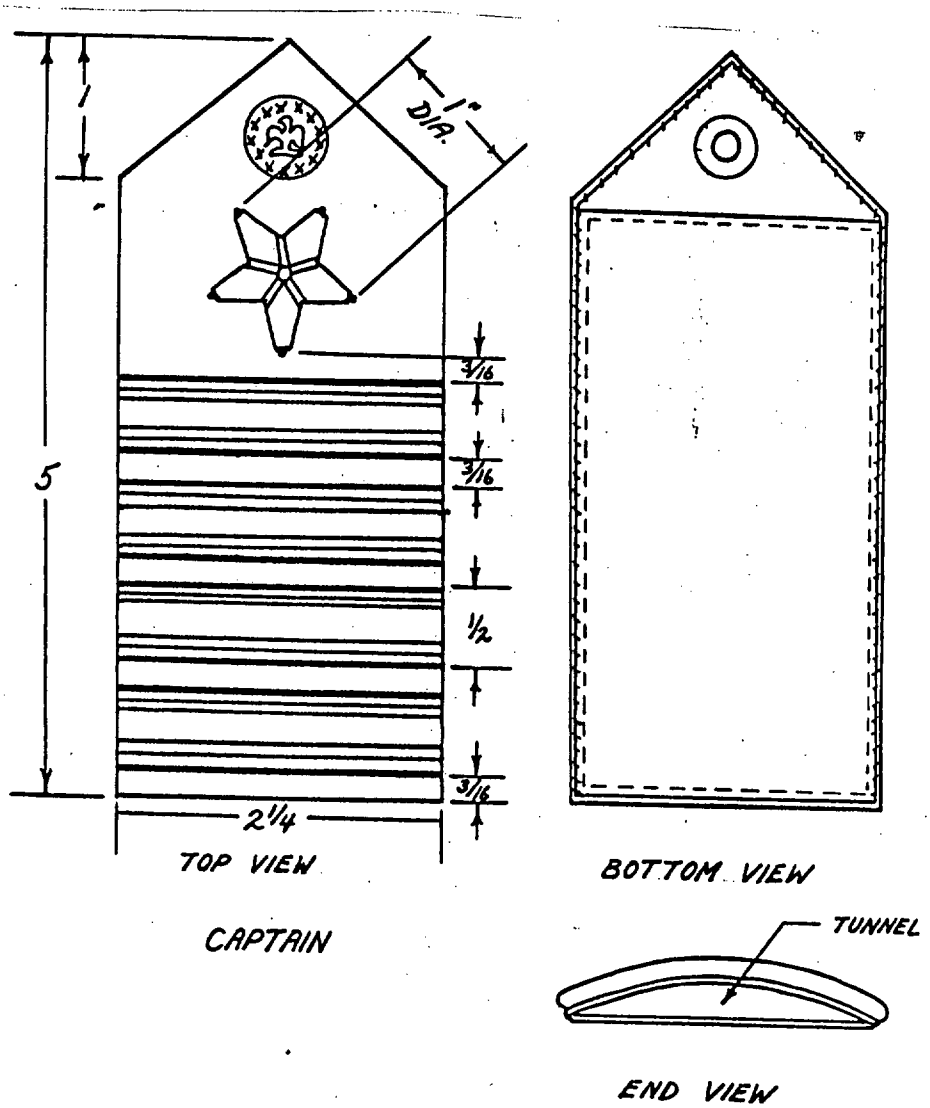

NOTE: STAFF CORPS DEVICE USED IN LIEU OF STAR, WHEN APPLICABLE

Figure 5 - Shoulder boards, type I, class 2, style W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

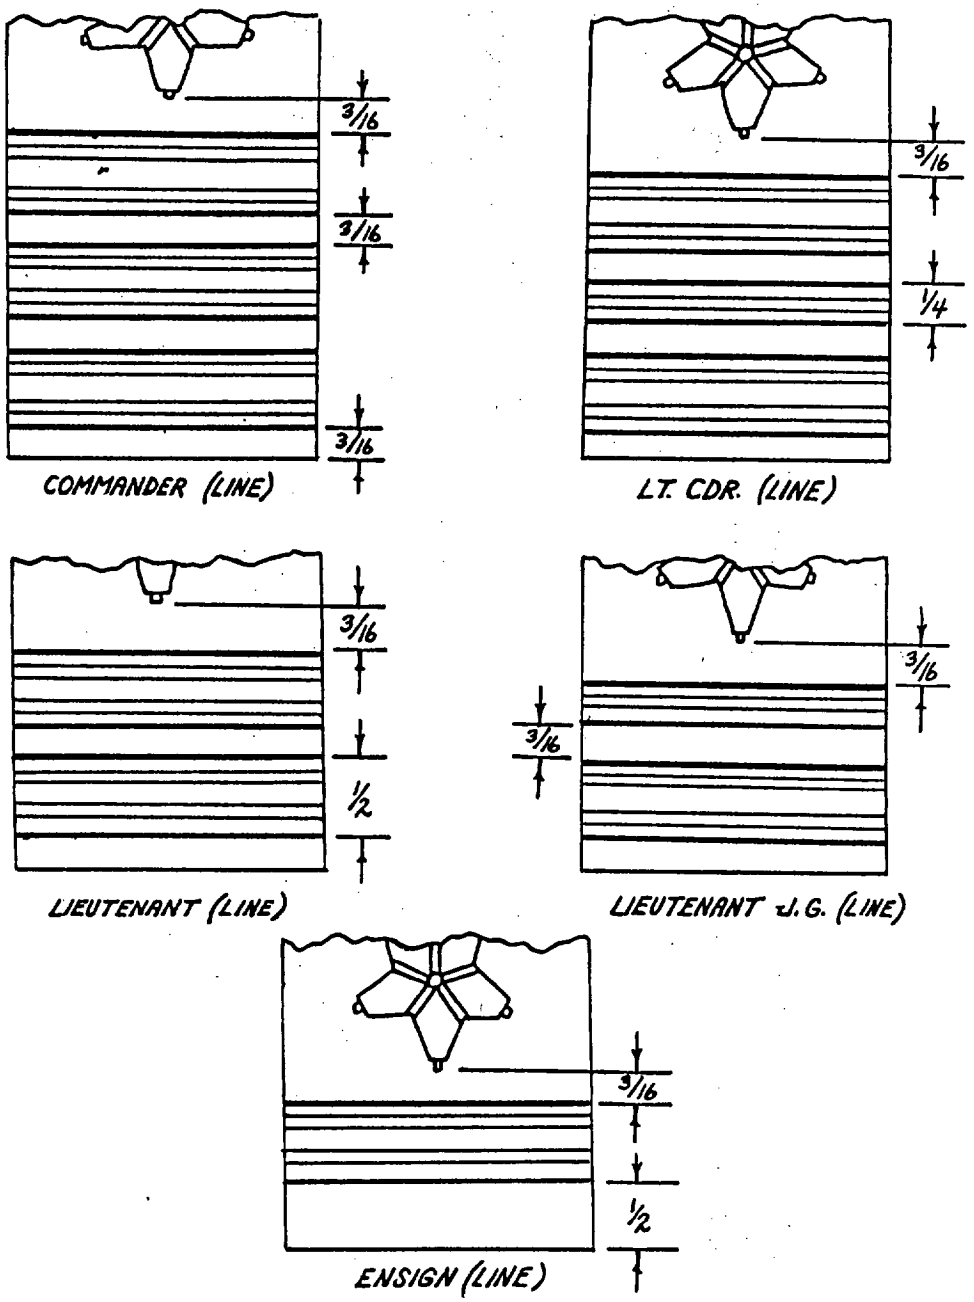


Figure 6 - Shoulder boards, type I, class 2, style W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

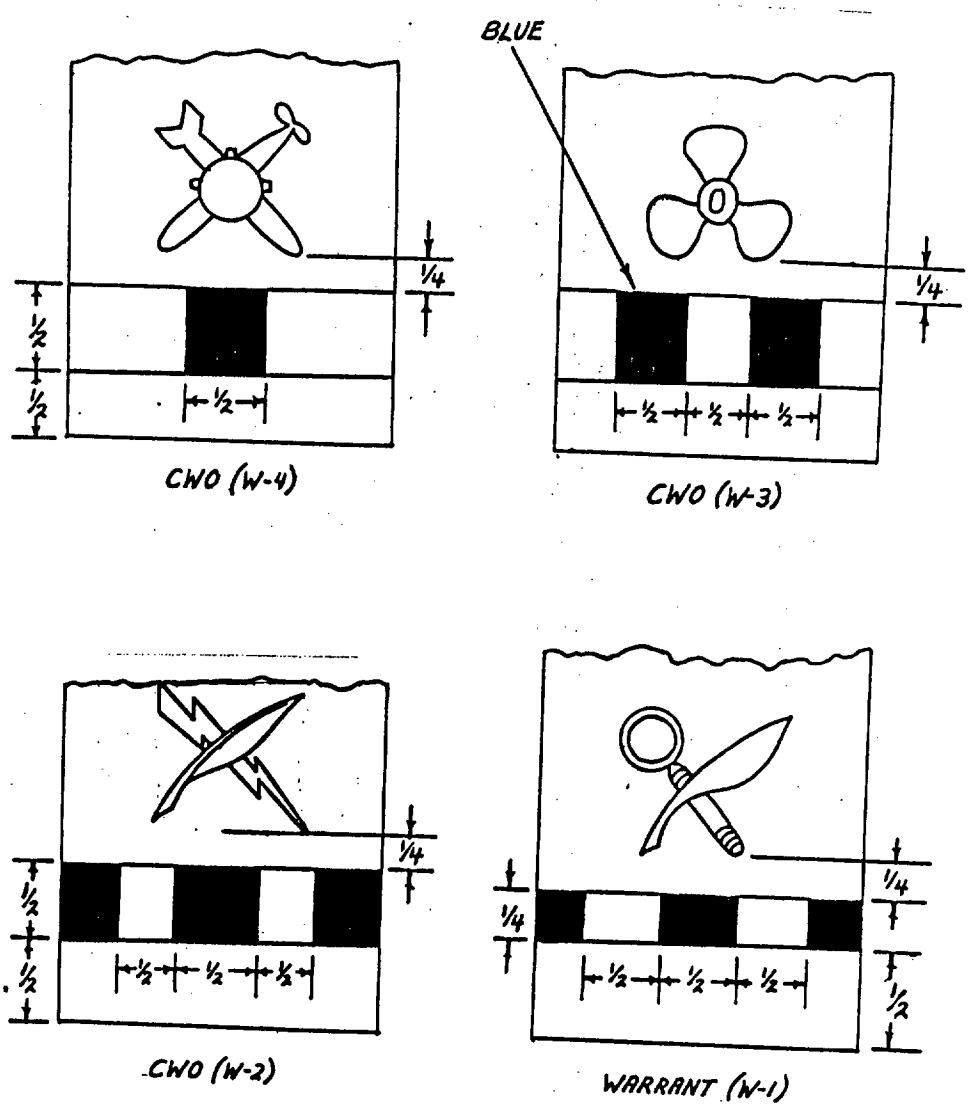


Figure 7 - Shoulder boards, type I, class 3, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

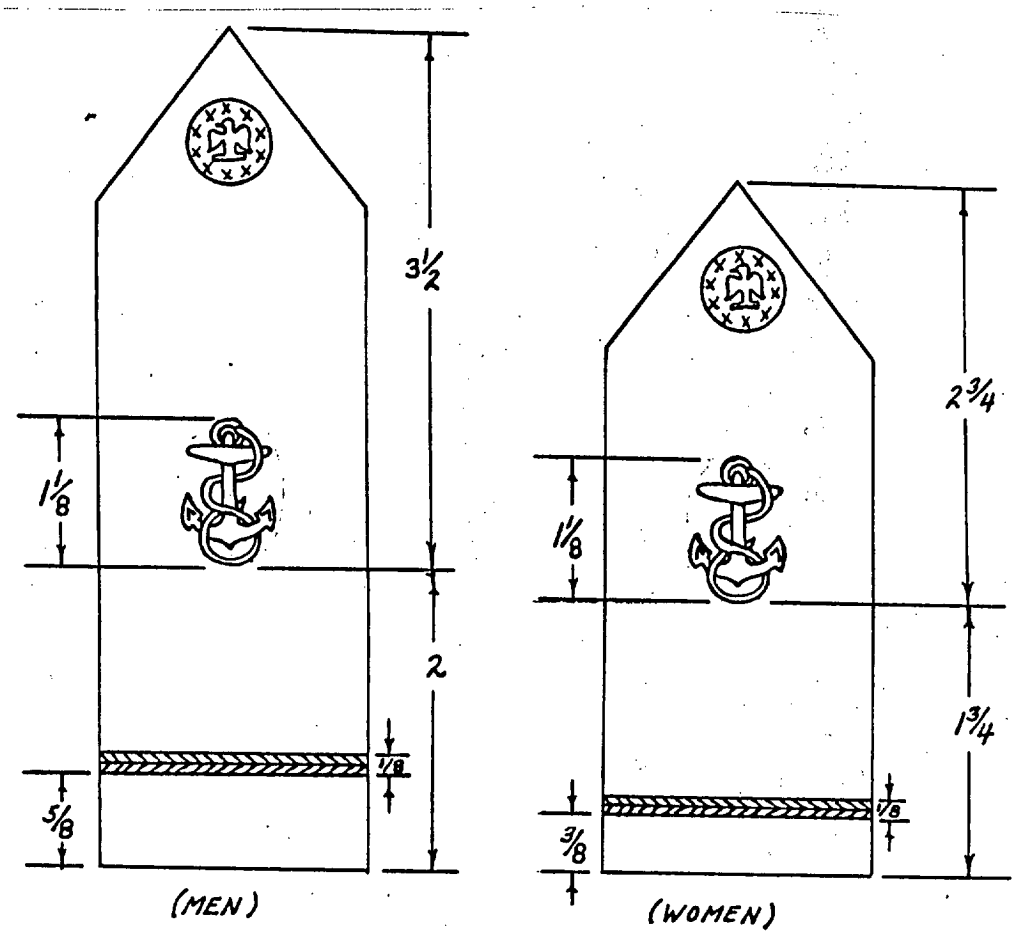


Figure 8 - Shoulder boards, types II, and III, class 4, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

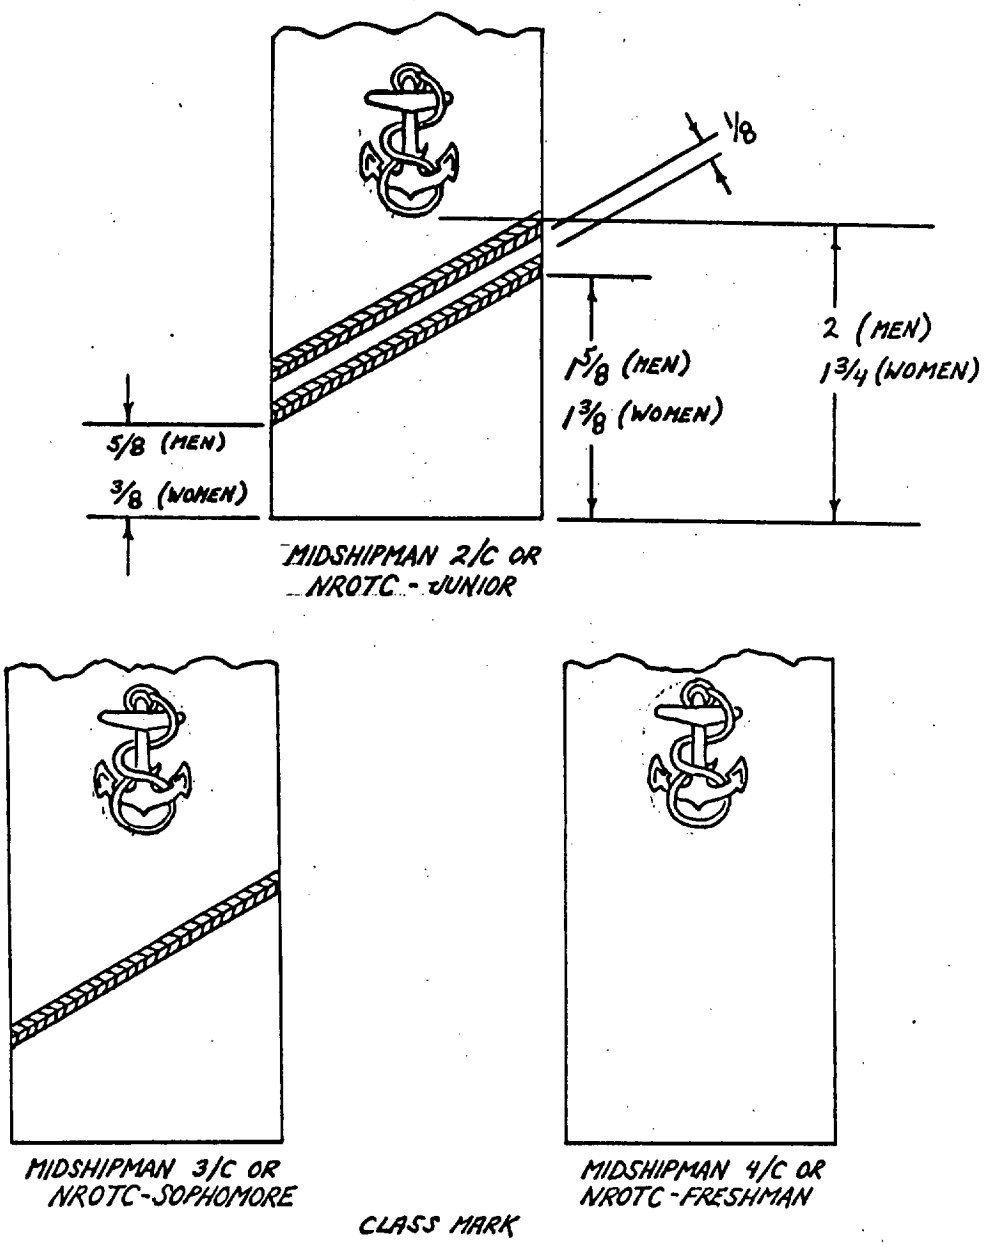


Figure 9 - Shoulder boards, types II and III, class 4, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

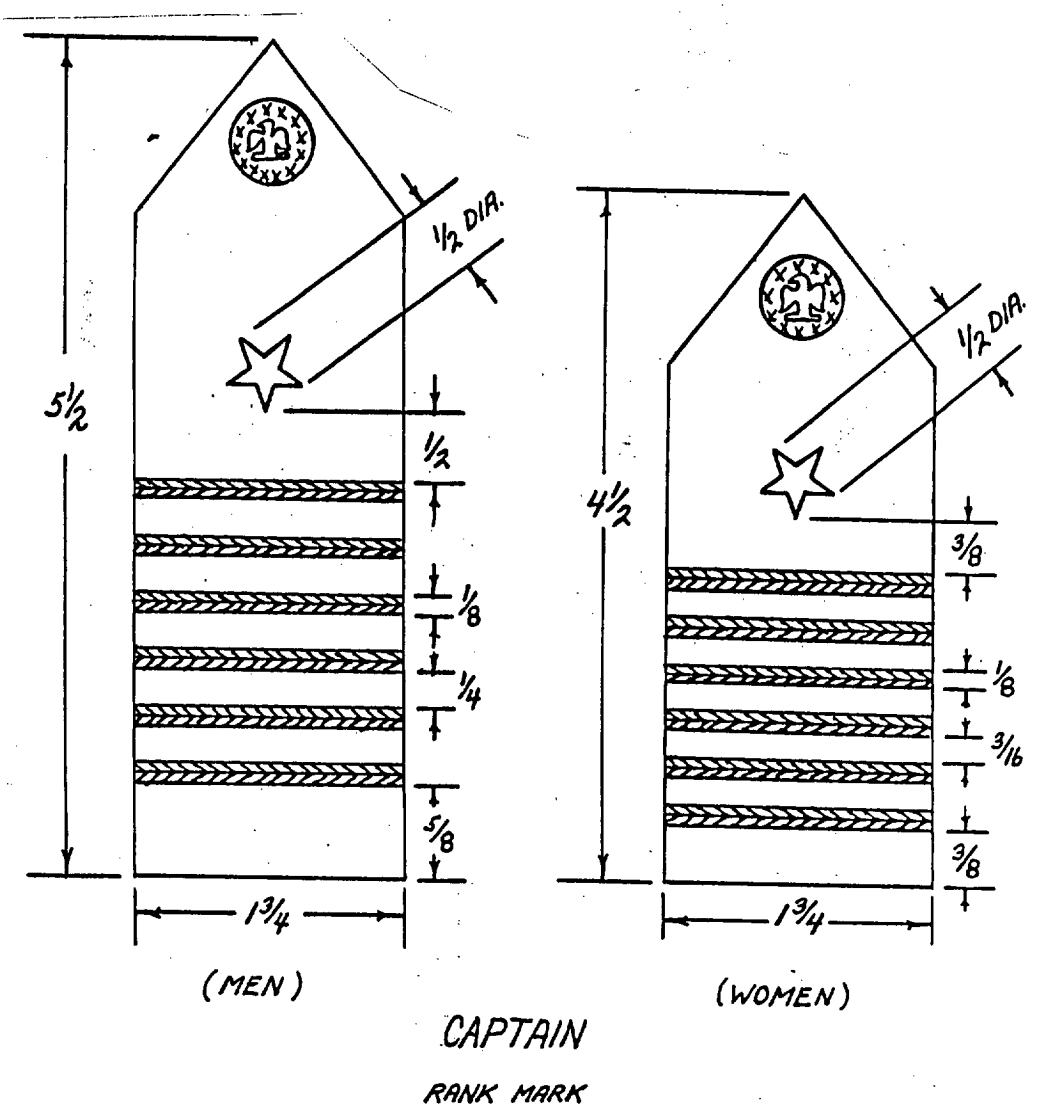


Figure 10 - Shoulder boards, types II and III, class 4, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

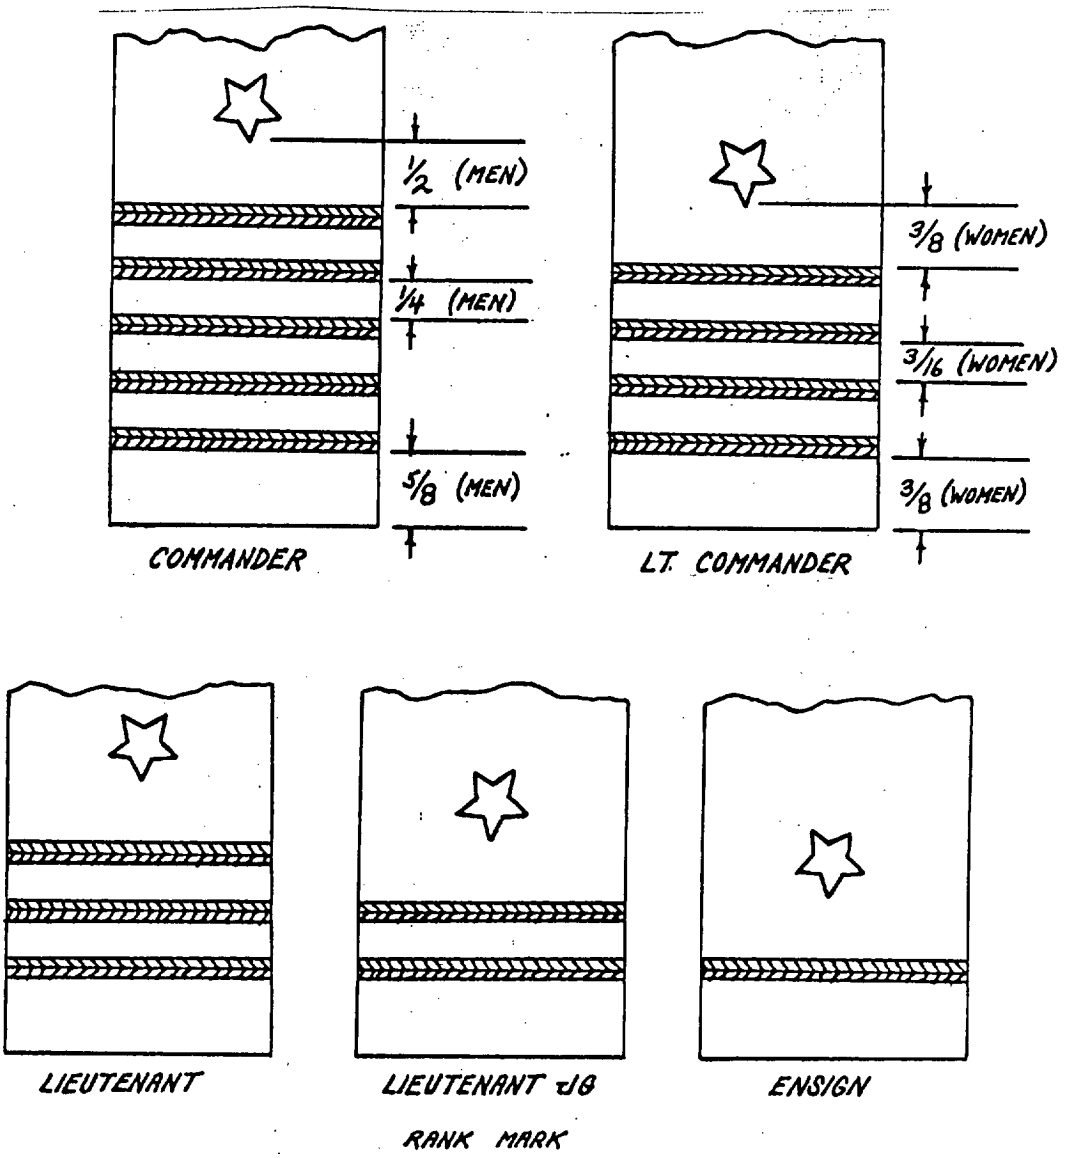


Figure 11 - Shoulder boards, types II and III, class 4, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

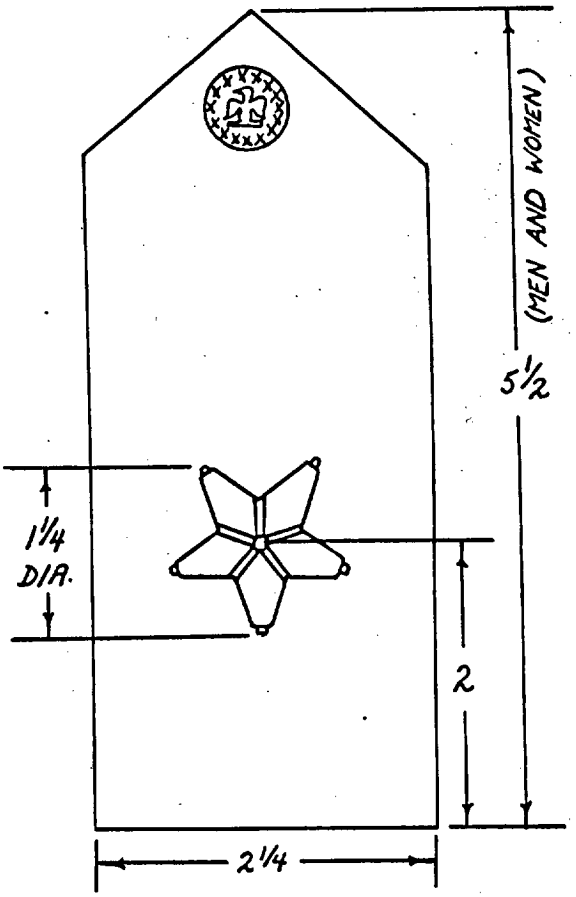


Figure 12 - Shoulder boards, type I, class 6, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.



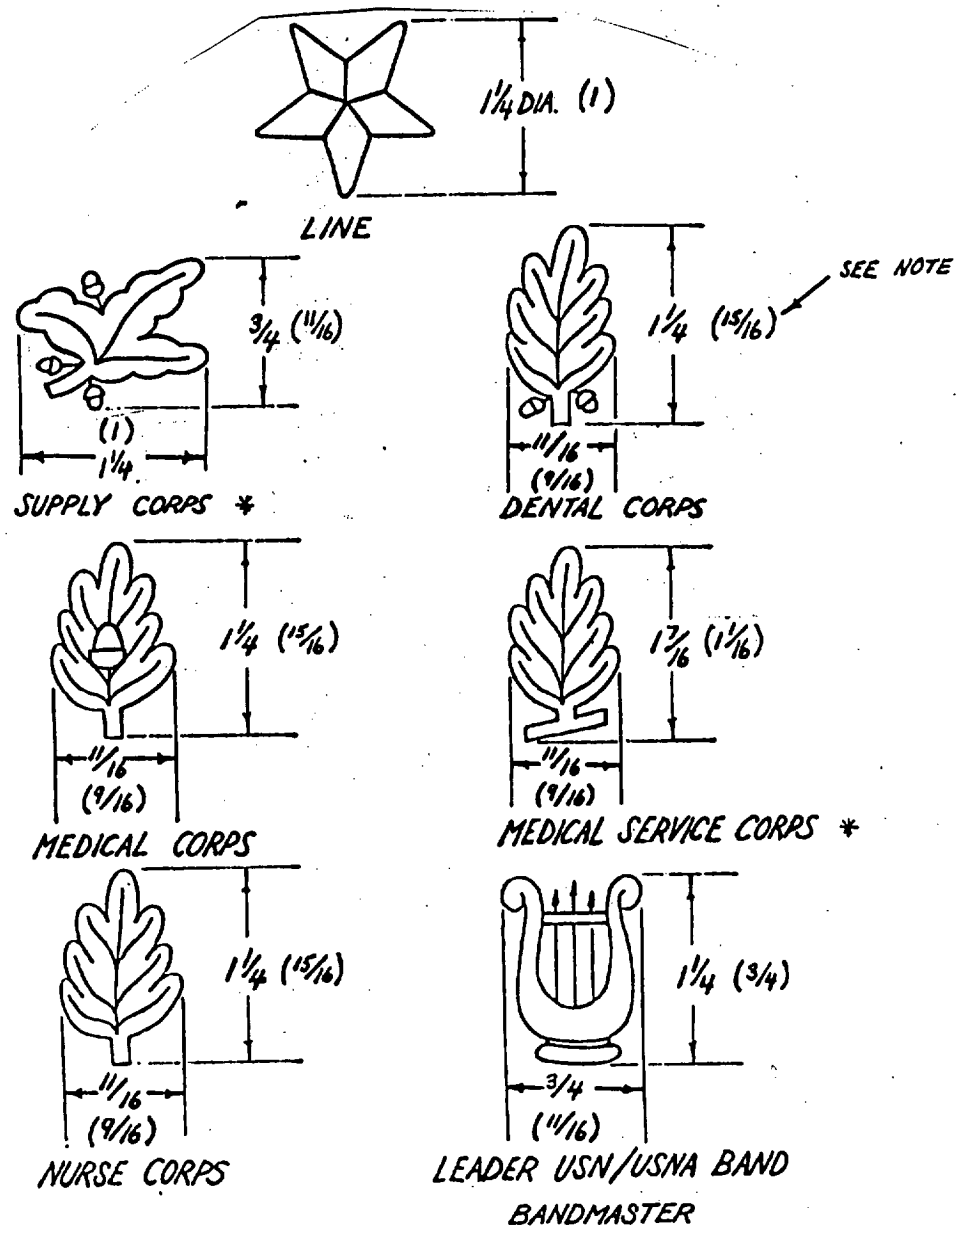


Figure 13 - Line and Staff Corp devices


Source: https://assist.dla.mil -- Downloaded: 202610-18T09:13Z
Check the source to verify that this is the current version before use.

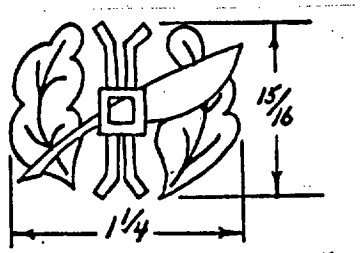


LDO-LAW COMMUNITY *

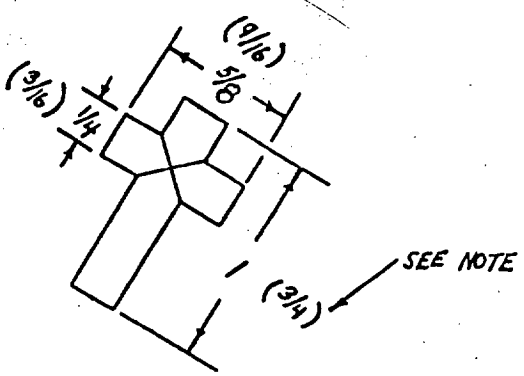

CHAPLAIN CORPS *
(CHRISTIAN)



JUDGE ADVOCATE
GENERAL'S CORPS

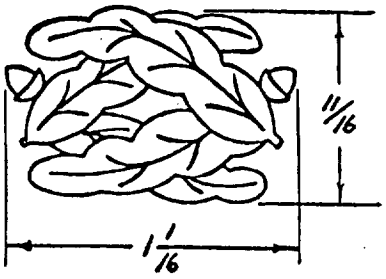

CIVIL ENGINEER CORPS *
AND
CIVIL ENGINEER CORPS WARRANT

* RIGHTS AND LEFTS

NOTE: MEASUREMENTS WITHIN "( )" APPLY TO WOMEN'S SHOULDER BOARDS ONLY.

Figure 14 - Line and Staff Corp devices

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:13Z
Check the source to verify that this is the current version before use.

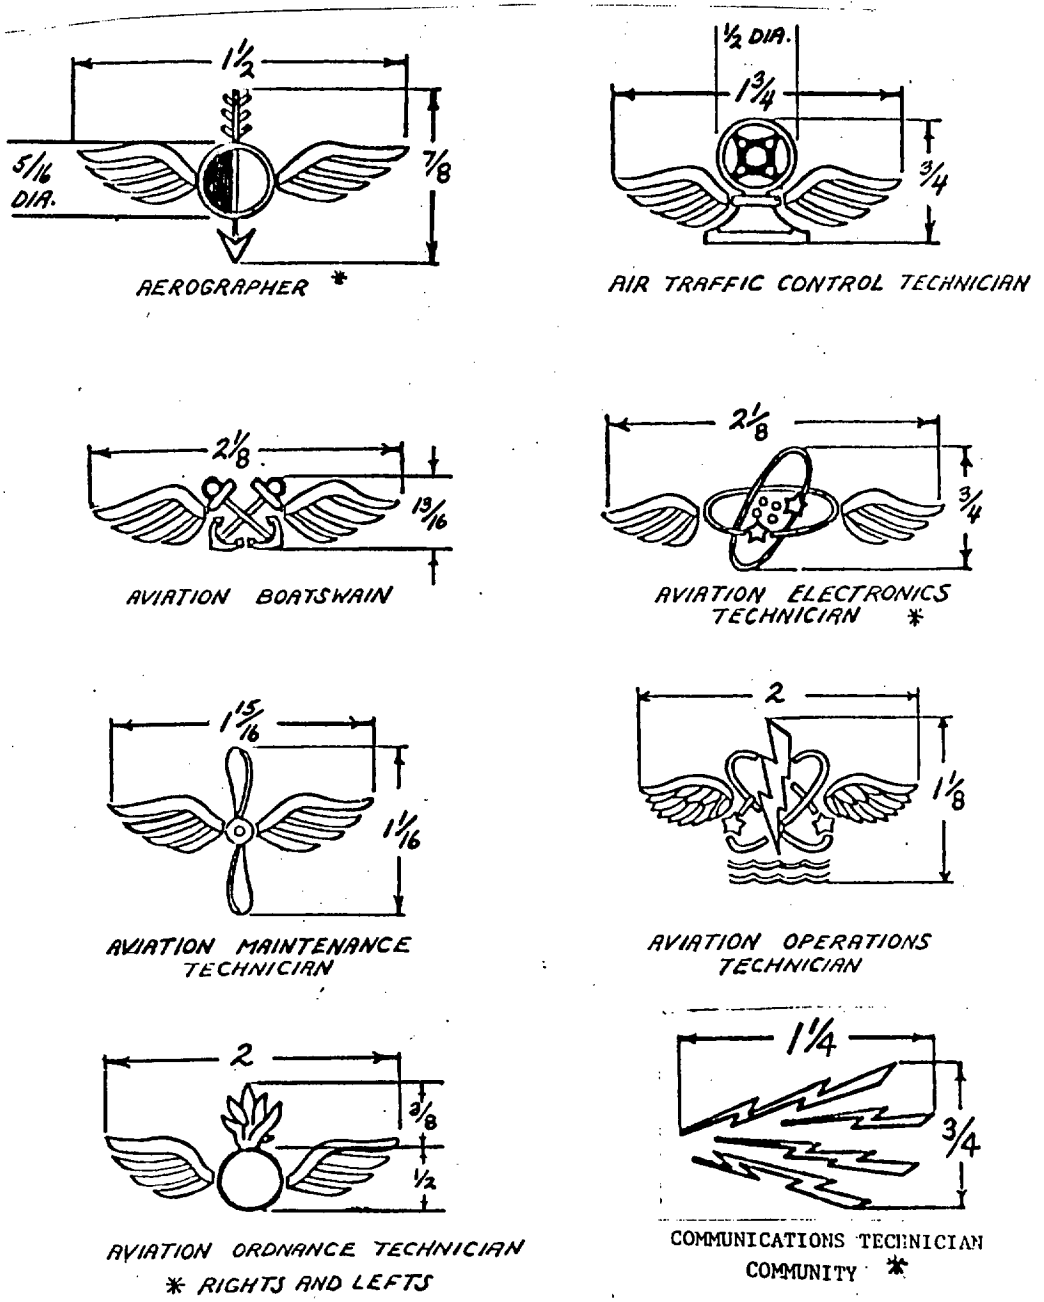


Figure 15 - Line and Staff Corp devices

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:13Z
Check the source to verify that this is the current version before use.

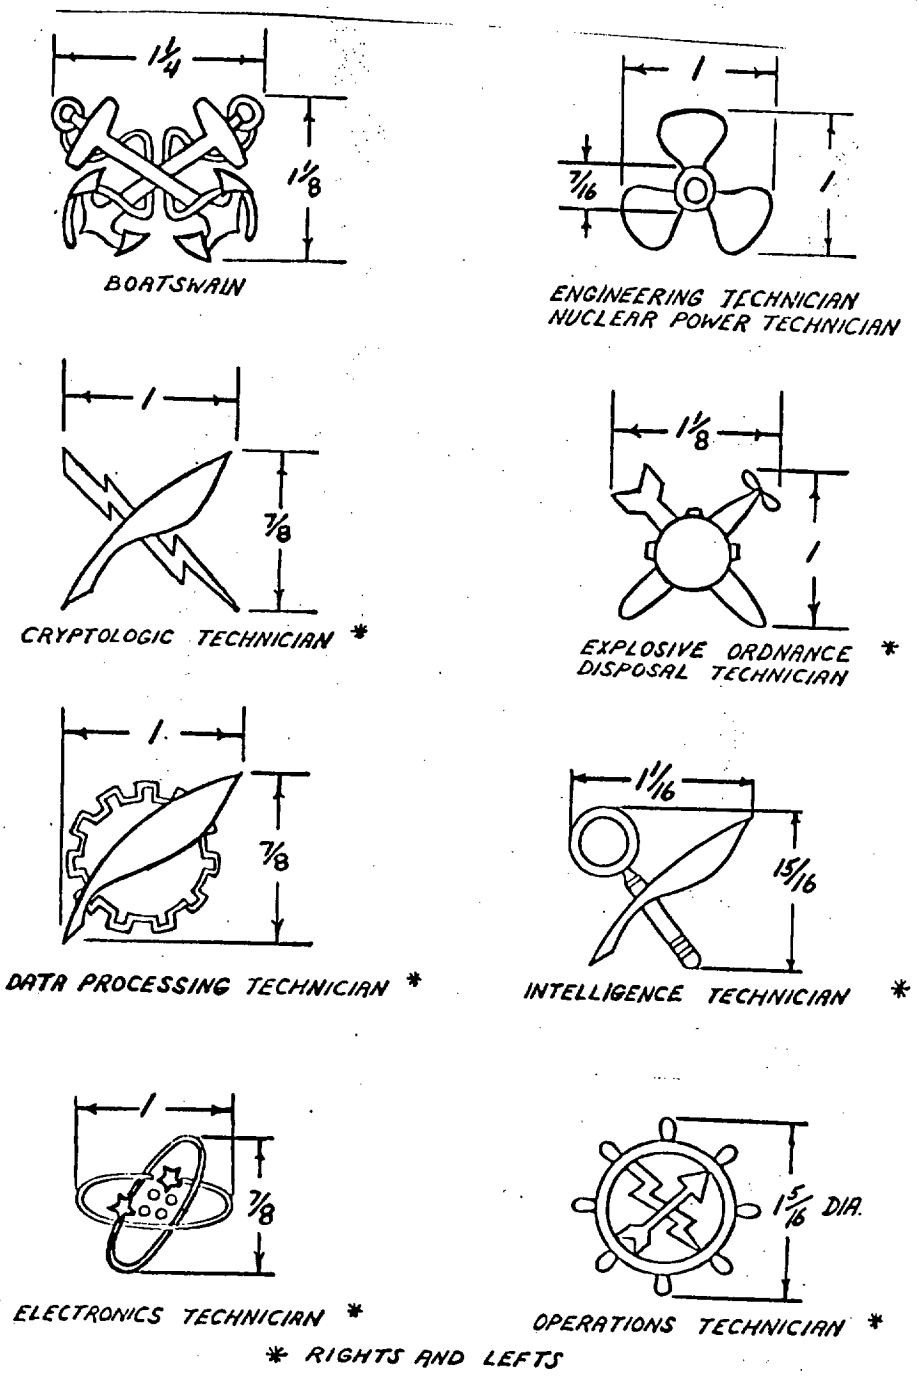


Figure 16 - Line and Staff Corp devices

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.


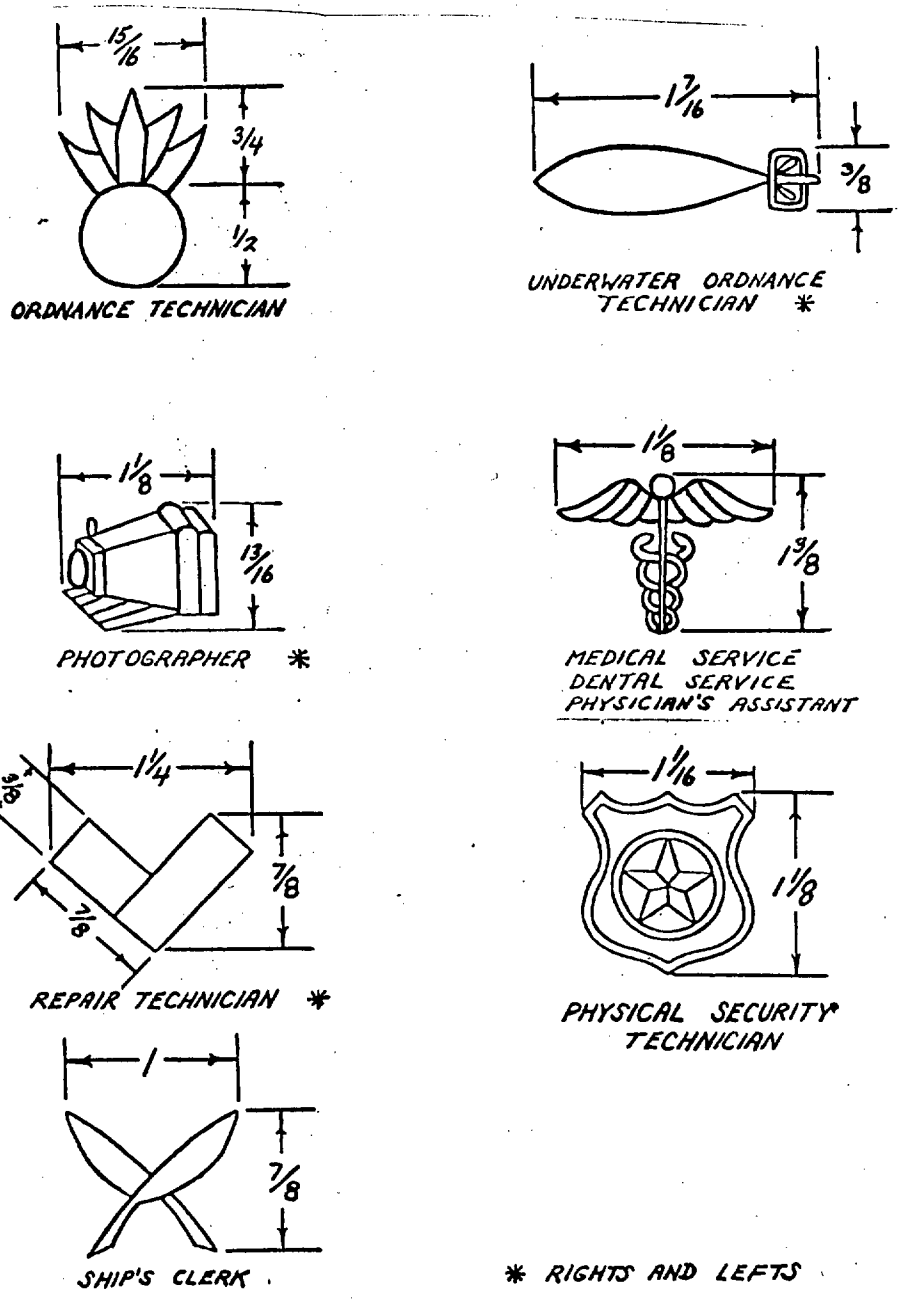


Figure 17 - Line and Staff Corp devices

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

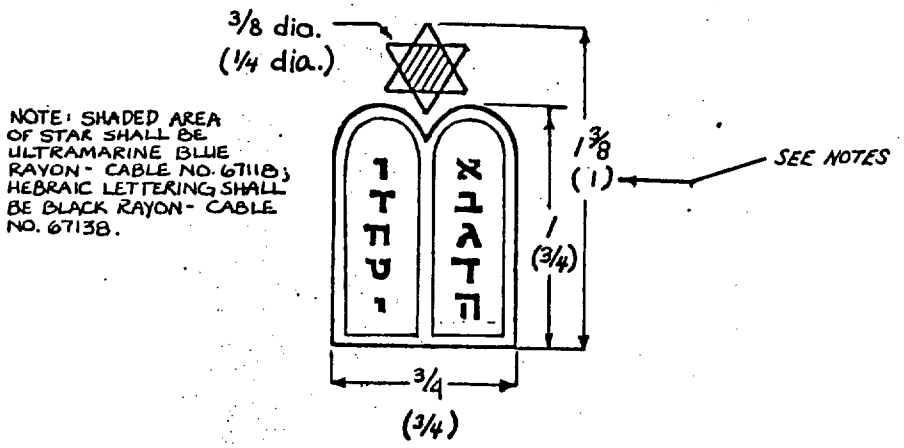

CHAPLAIN CORPS
(JEWISH)

NOTES: THE ABOVE ILLUSTRATES THE EXACT HEBRAIC STYLE LETTERING APPROVED FOR U.S. NAVY INSIGNIA.

MEASUREMENTS WITHIN "( )" APPLY TO WOMEN'S BOARDS ONLY.

Figure 18 - Line and Staff Corp devices

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:13Z
Check the source to verify that this is the current version before use.

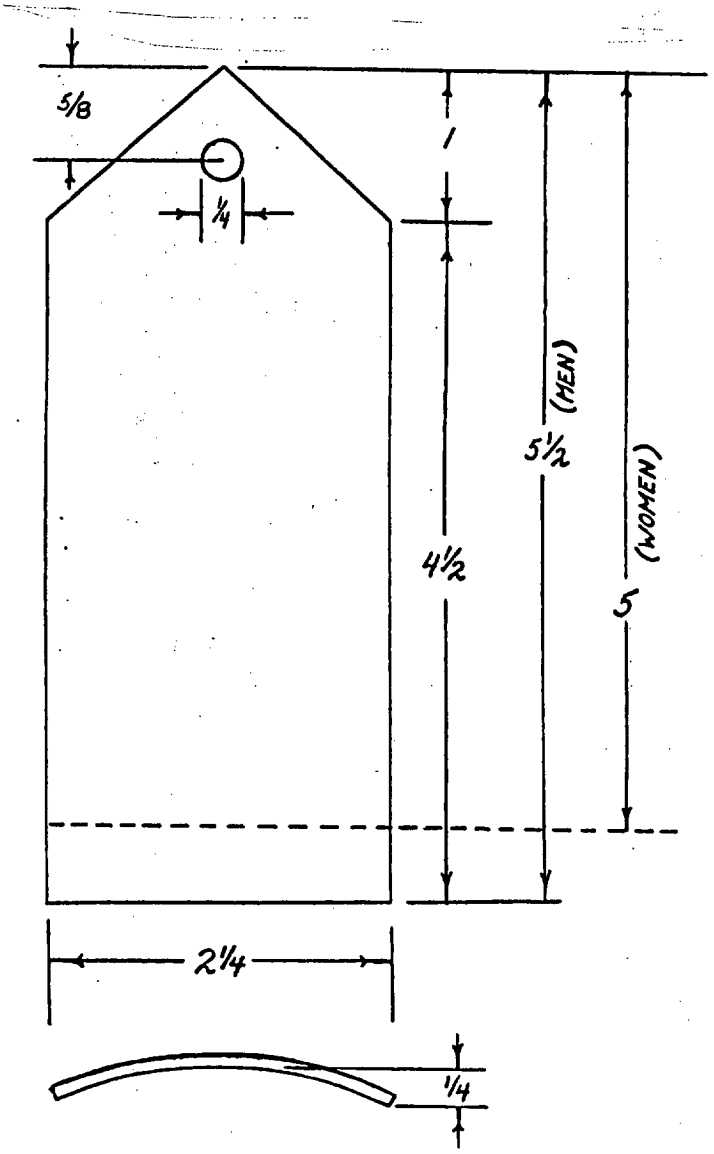


Figure 19 - Shoulder Mark, hard, fiberboard base, type I, classes 1,2 and 3, styles M and W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:13Z
Check the source to verify that this is the current version before use.

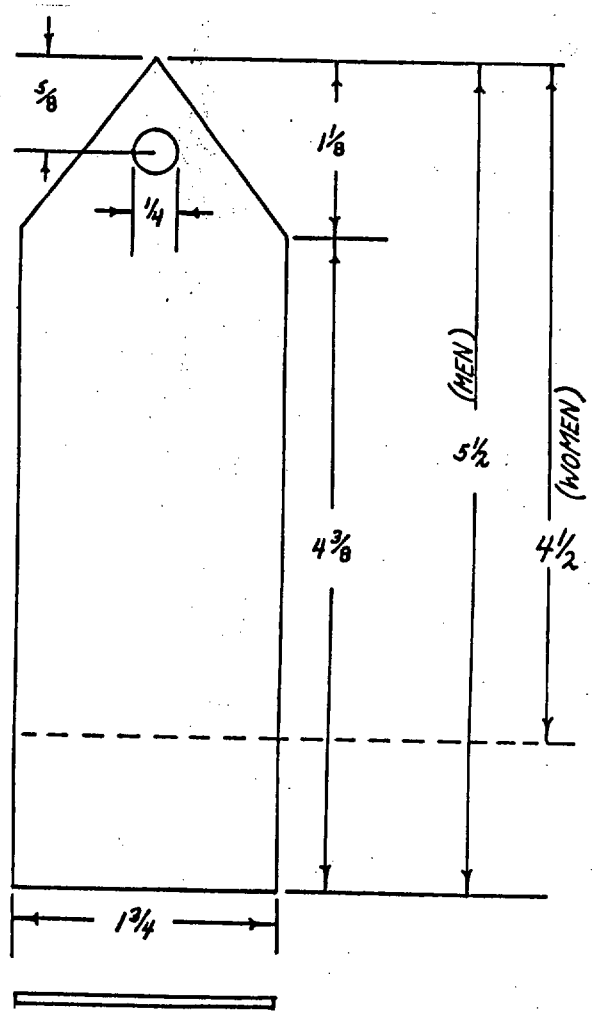


Figure 20 - Shoulder Mark, hard, fiberboard base, type II, class 4, styles M and W

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:13Z
Check the source to verify that this is the current version before use.

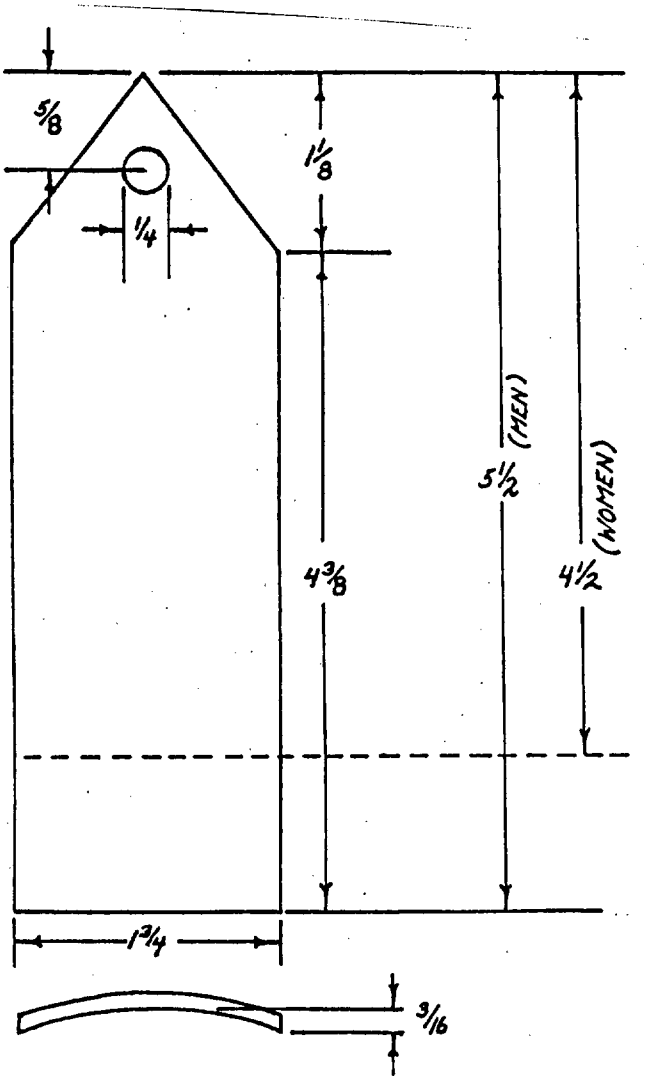


Figure 21 - Shoulder Mark, hard, fiberboard base, type III, class 4, styles M and W

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:13Z
Check the source to verify that this is the current version before use.