MIL-T-16549G
31 December 1985
SUPERSEDING
MIL-T-16549F
4 September 1973

MILITARY SPECIFICATION

TRUCKS, HAND, SHELF, UTILITY, 3 SHELVES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers hand trucks with 3 shelves.

* 1.2 Classification. The trucks shall be of the following types and sizes as specified (see 6.2). Specified dimensions are in inches and do not include handles or bumpers.

Type I - General utility (± 2 inches)

Size 1	- 38 long by 23 wide by 36 high
Size 2	- 57 long by 24 wide by 43 high
Size 3	- 31 long by 20 wide by 34 high

Type III - Bussing - Bottom shelf being a wire rack and intermediate shelf removable 39 long by 24 wide by 43 high

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to U.S. Army Natick Research and Development Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin
L-P-392	- Plastic Molding Material, Acetal, Injection and Extrusion
FF-C-77	- Casters, Rigid and Swivel (Institutional Duty)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-C-52950	- Crates, Wood, Open and Covered

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

DRAWINGS

U.S. ARMY NATICK RESEARCH AND DEVELOPMENT CENTER

6-5-20	- Truck, Hand, Utility, 3 Shelves - Type III, Assembly
6-5-22	- Truck, Hand, Utility, 3 Shelves - Type III, Shelf Details

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this document to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

NATIONAL SANITATION FOUNDATION (NSF)

Standard No. 2 - Food Service Equipment

Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468, Ann Arbor, Michigan 48106.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip

A 240 - Heat-Resisting Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels

A 269 - Seamless and Welded Austenitic Stainless Steel Tubing for General Service

A 276 - Stainless and Heat Resisting Steel Bars

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

USAS MH11.1 - USA Standard Specification for Industrial Casters

(Application for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10017.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Standard product. The trucks delivered under this document shall be the manufacturer's current commercial standard product except for any changes required to comply with document requirements. All like items furnished on any one contract, including parts and subassemblies thereof, shall be new and interchangeable.

3.2 Codes and standards. The trucks shall conform to the applicable requirements of NSF Standard No. 2.

3.2.1 Compliance. Prior to approval of the first article, if one is submitted, or prior to commencing production, the contractor shall submit to the contracting officer or his authorized representative satisfactory evidence that the trucks he proposes to furnish under this document meet the applicable requirements of NSF Standard No. 2 as follows:

a. A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF Seal on the finished truck; or

b. A certification for the truck, issued by NSF under their special one-time contract evaluation/certification service; or

c. A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the trucks are being acquired, indicating that the trucks have been tested and conform to NSF Standard No. 2.

* 3.3 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for his trucks provided the completed item complies with all provisions of this document. Recycled material may be used (see 6.3).

3.3.1 Stainless steel.

3.3.1.1 Sheet and strip. Stainless steel sheet, plate and strip shall conform to the requirements for type 302 or 304 of ASTM A 167 or ASTM A 240.

3.3.1.2 Tubing. Stainless steel tubing shall conform to the requirements for type 304 of ASTM A 269.

3.3.1.3 Bars and shapes. Stainless steel bars and shapes shall conform to the requirements for any type in the 300 series, cold finished, of ASTM A 276.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

3.3.2 Threaded fasteners. Threaded fasteners shall be stainless steel, nickel-plated carbon steel, or chromium-plated carbon steel.

3.3.3 Plastic bearings. Plastic bearing material shall conform to type 1 or 2, class 1, of L-P-392.

* 3.4 Design and construction. The trucks covered by this document shall be of the type and size as specified in 1.2. Dimensions and capacities shall be as specified in table I. Type I trucks shall be similar to the truck shown on figure 1, but figure 1 is illustrative only and is not intended to preclude procurement of trucks otherwise meeting all requirements of this document. Type III trucks shall be as specified on Drawings 6-5-20 and 6-5-22. Except for casters, bumpers, and associated hardware, all parts of the trucks shall be fabricated of the stainless steel specified in 3.3.1.1, 3.3.1.2, and 3.3.1.3. All trucks shall have 3 shelves and 4 removable casters. The trucks shall show no evidence of weld failure, parts separation, metal tearing, breakage, or permanent deformation when tested as specified, in 4.4.1, 4.4.2, and 4.4.3 or 4.4.4, as applicable. Truck frame, handle, and bumpers shall withstand the impact tests as specified in 4.4.3 or 4.4.4, as applicable.

TABLE I. Physical and dimensional requirements

Truck classification	Area per shelf (sq. in. minimum)	Overall dimensions 1/ (± 2 inches) Lgth.	Wdth.	Hgt.	Material thickness (gage, minimum) Shelves	Frame	Shelf spacing 2/ (inches, minimum)	Truck capacities (pounds)
Type I								
Size 1	690	38	23	36	16	14	10	250
Size 2	1200	57	24	43	16	14	13	350
Size 3	460	31	20	34	20	18	12 1/2	200
Type III								
	(See Drawing 6-5-20)							200

1/ Overall dimensions for type I trucks do not include bumpers and handles.
2/ Shelf spacing is defined as the distance between the top surface of one shelf to the bottom surface of the shelf above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

* 3.4.1 Type I truck. The type I truck shall have three equally spaced shelves welded to an angle frame. The top and middle shelves shall have all edges turned up not less than 3/4 inch and doubled down on the outside, except that the size 3 truck shall have the right edge only of the top and middle shelves turned down not less than 1 inch, doubled, and returned with the cut edge under the shelf. The edges of the bottom shelf shall be so formed as to comply with the sanitation and load requirements specified herein. A bolster to support the caster shall be welded to the underside of the unit.

3.4.1.1 Casters, type I trucks. Casters shall be electrically conductive and as specified in 3.4.1.1.1 or 3.4.1.1.2, as applicable.

3.4.1.1.1 Size 1 and 2. The casters for the type I, size 1 and 2 trucks shall conform to the requirements for class C, wheel diameter 8 inches, style a, b, or c, mounting P or T of FF-C-77. The front casters shall be type I (rigid), the rear casters shall be type II (swivel).

3.4.1.1.2 Size 3. The four casters for the type I, size 3 truck shall conform to the requirements for type II, (swivel) class A, wheel diameter 5 inches, style a, b, or c, mounting P or T of FF-C-77.

3.4.1.2 Handle. All type I trucks shall have a push handle of 1-inch diameter (nominal) stainless steel tubing with a 16 gage (minimum) wall thickness. The handle shall be welded to the frame at one end of the truck. The clearance between the truck frame and the handle shall be not less than 3 inches. Doughnut type handle bumpers of rubber, molded plastic, or vinyl shall be attached to each end of the handle. Handle bumpers shall be removable.

3.4.1.3 Frame bumpers. All type I trucks shall have four corner bumpers, or a single bumper encircling the entire truck, at the approximate level of the lowest shelf. Bumpers shall be of rubber, molded plastic, or vinyl and shall be attached to trucks in accordance with the manufacturer's standard practice. Bumpers shall be removable.

3.4.2 Type III truck. The design and construction of the type III truck shall conform to the requirements specified herein and as specified on Drawings 6-5-20 and 6-5-22. The truck shall have a tubular frame welded to a base frame consisting of 2 cross-channels and 2 longitudinal channels welded together. The truck shall have a fixed top shelf, a removable intermediate shelf, a formed sheet enclosing the back and both ends of the truck from the top shelf to the intermediate shelf, and a wire rack shelf at the bottom. The bottom wire rack shall be fabricated from stainless steel rod or tubing and welded to the frame. There shall be 8 equally spaced rods (or tubes) parallel to the 24 inch side of the truck and 4 equally spaced rods (or tubes) parallel to the 39 inch side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

3.4.2.1 Casters, type III trucks. Each type III truck shall have two type I (rigid) and two type II (swivel) casters conforming to Class C, 5-inch wheel diameter, style a, with polyurethane tread, 300 pound minimum load rating per caster, mounting P, of FF-C-77, with the exception of the wheel bearings. The wheel bearings shall be sleeve type fabricated of the plastic material specified in 3.3.3 in accordance with the manufacturer's standard practice. Mounting plate dimensions, bolt hole diameter, and spacings shall be as specified for medium duty 5-inch wheel diameter casters of USA Standard Specification for Industrial Casters, USAS MH11.1. The casters shall be NSF approved. The swivel bearings shall be sealed.

3.4.2.2. Bumpers. A vertical non-marking synthetic rubber bumper shall be provided for each corner post of the tubular frame. The bumper shall be wrapped around the tube not less than 180 degrees, shall be securely fastened to the frame in accordance with the manufacturer's standard practice, and shall extend approximately the full length of the straight portion of the post. The bumpers shall be removable.

3.5 Finish. Finish shall comply with the applicable provisions of NSF Standard No. 2.

3.6 Marking for identification. Each truck shall be permanently and legibly marked with the manufacturer's name, trade name, or trademark easily identifiable with said manufacturer.

3.7 Workmanship. The finished trucks shall be clean and free of scratches, dents, wrinkles, fabrication marks, breaks, cracks, punctures, sharp edges, sharp corners, burrs, slivers, discoloration, and deformities.

3.7.1 Welds. Welds shall be ground to blend with adjacent surfaces and shall be free of pinholes, burnholes, cracks, incomplete fusion, pits, and flashes. All flux shall be removed.

3.7.2 Threaded fasteners. Threaded fasteners shall be drawn tight and shall be free of crossed or stripped threads.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Unless otherwise specified, all inspections shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.2.2 End item inspection. The lot shall consist of all trucks of the same type and size offered for inspection at one time. The sample unit shall be one completely assembled truck.

* 4.2.2.1 Visual inspection. Inspection shall be made of the trucks for the defects listed in table II. The inspection level shall be II, and the acceptable quality level (AQL) shall be 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Dirty		201
	Scratches, fabrication marks	101	
Construction and workmanship (general)	Part of component missing or not specified type	102	
	Wrinkles, cracks, punctures, sharp edges, sharp corners	103	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects - Continued

Examine	Defect	Classification	
		Major	Minor
Shelves	Not number specified	104	
	Not formed as specified	105	
Bumpers	Not type specified, missing, not removable	106	
Casters	Not as specified	107	
Welds	Pinholes, burnholes, pits, flashes, flux not removed	108	
	Not ground to blend with adjacent surfaces, cracked, incomplete fusion	109	
Threaded fasteners	Loose		202
	Missing, crossed, or stripped threads	110	
Markings for identification	Missing, incomplete, illegible, not permanent	111	

4.2.2.2 Dimensional inspection. Examination shall be made of the trucks for compliance with specified dimensions. Any dimension that is not within the specified tolerance shall be classified as a defect. The inspection level shall be S-2, and the AQL shall be 2.5, expressed in terms of defects per hundred units.

4.2.2.3 End item testing. The sample trucks shall be tested as specified in 4.4.1 through 4.4.4. Failure of a test shall be recorded as a defect. The inspection level shall be S-2, and the AQL shall be 2.5, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

* 4.2.3 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored as specified in table III. The lot size shall be the number of containers in the inspection lot. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2, and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE III. Packaging inspection

Examine	Defect
Markings, exterior and interior	Omitted, incorrect, illegible, or of improper size, location, sequence, or method of application
Materials	Component missing or damaged
Workmanship	Bulged or distorted containers

* 4.3 Standards compliance. Proof of compliance with the requirements of 3.2 shall be submitted to the Government representative.

4.4 Tests.

4.4.1 Static load. The truck shall be loaded with a static load not less than 200 percent of the capacities shown in table I. Type I trucks shall have the load equally divided among the shelves and uniformly distributed on the shelf surfaces. Type III trucks shall have the load divided as follows: 25 percent on the top shelf, 50 percent on the middle shelf, and 25 percent on the bottom shelf. The load shall be uniformly distributed on the shelf surfaces. The loaded truck shall remain stationary for a period of not less than 10 minutes. The truck shall then be examined, the load removed, and the truck reexamined to determine that there are no weld failures, parts separation, metal tearing, breakage, or deformation as specified in 3.4.

4.4.2 Shock load. The truck shall be placed on a raised platform having vertical sides of not less than 2 inches in height. The truck shall then be loaded to 150 percent capacity, distributed as in 4.4.1. The truck shall then be rolled off the raised platform at a speed of not less than 2 miles per hour

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

(mph) and dropped onto a level concrete surface. The test shall be repeated 20 times with the direction of travel perpendicular to the raised platform side, and 20 times with the direction of travel at a 45 degree angle to the raised platform side. The load shall then be removed and the truck examined to determine that there are no weld failures, parts separation, metal tearing, breakage, or deformation as specified in 3.4.

* 4.4.3 Impact test for type I trucks.

4.4.3.1 Forward motion. The truck, loaded as specified in 4.4.2, shall be pushed three times into a solid wall at a speed of not less than 2 mph. Two of the collisions shall be against the wall with each truck corner at an angle of 45 ± 5 degrees, and one collision shall be head-on. The truck shall then be unloaded and examined to determine that there are no weld failures, parts separation, metal tearing, breakage, or deformation as specified in 3.4. Bumpers shall have remained in place.

4.4.3.2 Backward motion. The trucks, unloaded, shall be pushed three times into a solid wall at a speed of not less than 2 mph. Two of the collisions shall be against the wall at an angle of 45 ± 5 degrees, and one collision shall be head-on. The truck shall be examined for deformation or loosening of handle or loss of bumpers as specified in 3.4.

* 4.4.4 Impact test for type III trucks. The truck, loaded as specified in 4.4.2 shall be pushed six times into a solid wall at a speed of not less than 2 mph. Four of the collisions shall involve the wall and each of the truck corners at an angle of 45 ± 5 degrees, and one collision shall be head-on at each end. The truck shall then be unloaded and examined to determine that there are no weld failures, parts separation, metal tearing, breakage, or deformation as specified in 3.4. Bumpers shall have remained in place.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly and lubrication. The casters shall be detached from the truck. The casters shall be lubricated to capacity with the manufacturer's recommended lubricant containing a rust inhibitor.

5.1.1.2 Unit packing. Assembly hardware such as nuts, bolts, and washers shall be placed in a cloth drawstring bag. The casters shall be completely wrapped in kraft paper having a minimum basis weight of 60 pounds (24 by 36-500) and the wrap secured with tape. The casters and bagged hardware of

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

each truck shall then be unit packed in a snug-fitting fiberboard box conforming to style RSC, type CF, variety optional, or type SF, class domestic, grade optional of PPP-B-636. Closure shall be in accordance with the appendix of PPP-B-636.

* 5.1.2 Commercial. Each truck shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing.

* 5.2.1.1 Type I, size 2 and type III trucks. Each type I, size 2 or type III truck, preserved as specified in 5.1, shall be packed in a snug-fitting wood crate conforming to type I, style A of MIL-C-52950, except that the dimensional limitation shall be waived. The fiberboard box containing hardware and casters shall be secured within its respective truck in such a manner as to prevent movement during transit. The truck shall be blocked, braced, and cushioned or bolted in accordance with the appendix of MIL-C-52950. The contents shall be provided with a full length shroud in accordance with MIL-C-52950, except that the shroud shall be made of polyethylene. The polyethylene flexible film shall be minimum 0.004-inch thick, conforming to type II, grade A, B, or C, finish 1 of L-P-378. All seams shall be heat sealed. The crate shall be closed and strapped in accordance with the appendix of MIL-C-52950.

5.2.1.2 Type I, size 1 or 3 trucks. Each type I, size 1 or 3 truck, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. The fiberboard box containing the hardware and casters shall be secured within its respective truck in such a manner as to prevent movement during transit. Each truck shall then be blocked, braced, and cushioned by means of fiberboard die cut pads or forms as required to prevent movement or damage during transit. Each fiberboard container shall be closed in accordance with method V and reinforced as specified in the appendix of PPP-B-636.

5.2.2 Level B packing.

5.2.2.1 Type I, size 2 and type III trucks. Each type I, size 2, and type III truck, preserved as specified in 5.1, shall be packed as specified in 5.2.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

5.2.2.2 Type I, size 1 or 3 trucks. Each type I, size 1 or 3 truck, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety optional, or type SF, class domestic, grade 350 of PPP-B-636. The fiberboard box containing the hardware and casters shall be secured within its respective truck in such a manner as to prevent movement during transit. Each truck shall then be blocked, braced, and cushioned by means of fiberboard die cut pads or forms as required to prevent movement or damage during transit. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the fiberboard shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636.

* 5.2.3 Commercial packing. Trucks, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packs and shipping containers shall be in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The trucks are intended for use in kitchens, galleys, dining rooms, and hospitals for transporting food, kitchen supplies, dishes, medical and laboratory supplies, and linen.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type and size of truck required (see 1.2).
c. Selection of the applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.2.1).

* 6.3 Recycled material. The contractor is encouraged to use recycled material when practical, provided that it meets the requirements of this document (see 3.3).

6.4 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activities:

Army - MD
Navy - MS, MC
Air Force - 84
DLA-GS

Preparing activity:

Army - GL

Project No. 3920-0167

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

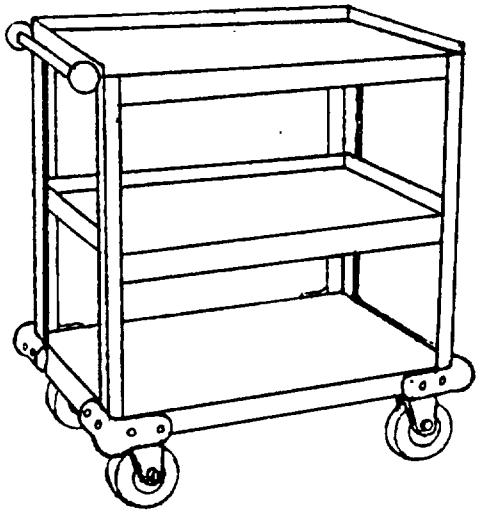


Figure 1. Type I, Size 3, Truck, Hand, Shelf, Utility

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
'S Army Natick Research and Development Center
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-16549G	TRUCKS, HAND, SHELF, UTILITY 3 SHELVES

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:12Z
Check the source to verify that this is the current version before use.