[INCH-POUND]
A-A-55519/3
November 4, 1996

COMMERCIAL ITEM DESCRIPTION

FUSE, INCLOSED LINK, SUBMINIATURE, SURFACE MOUNT (SM), VERY FAST ACTING, WITH WRAP AROUND TERMINALS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for very fast acting, SM, inclosed link fuses with wrap around terminals. Fuses covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

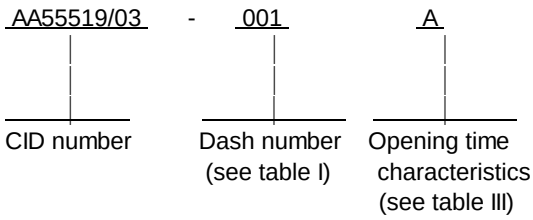

3. SALIENT CHARACTERISTICS

3.1 Design and construction. Fuses supplied to this CID shall be as specified herein.

3.2 Electrical specifications.

3.2.1 Voltage rating. The voltage rating shall be 125 V ac and 125 V dc maximum.

3.2.2 Interrupting ratings. The interrupting ratings shall be as indicated in table II.

3.2.3 Opening time characteristics. The opening time characteristics shall be as indicated in table III.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAM, 3990 East Broad Street, Columbus, OH 43216-5000, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

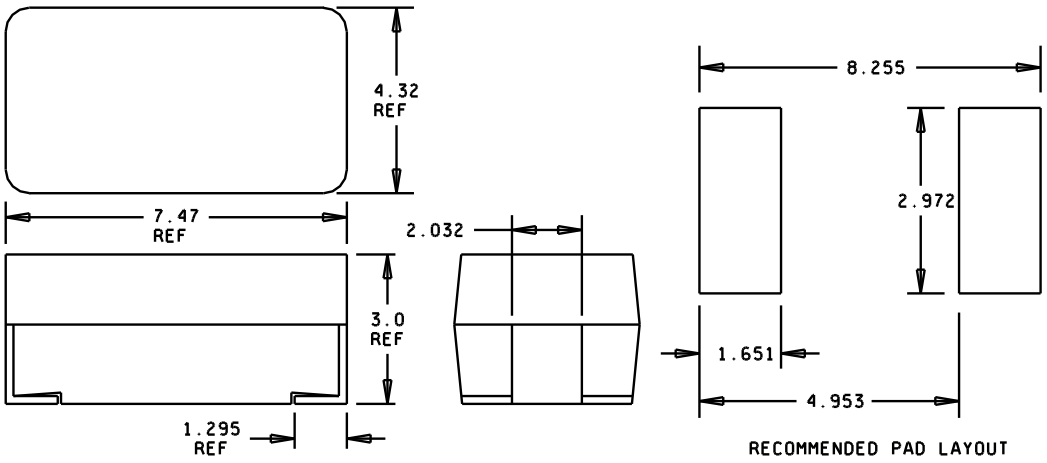

mm	Inches
1.295	.051
1.651	.065
2.032	.080
2.972	.117
3.0	.118
4.32	.170
4.953	.195
7.239	.285
8.255	.325

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ±0.15 millimeter (.006 inch).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics

CID dash number AA55519/03-	Ampere rating	Nominal resistance cold ohms	Nominal melting I^2t A^2 second
001	.0625	7.0	0.000075
002	.125	1.70	0.00163
003	.250	0.665	0.0106
004	.375	0.395	0.0254
005	.5	0.275	0.0546
006	.75	0.166	0.155
007	1.0	0.122	0.281
008	1.5	0.0817	0.650
009	2.0	0.0468	0.421
010	2.5	0.0350	0.721
011	3.0	0.0290	1.23
012	3.5	0.0240	1.65
013	4.0	0.0224	2.35
014	5.0	0.0155	3.90

TABLE II. Interrupting ratings.

Ampere (A) range	Interrupting rating
All ampere ratings	50 amperes at 125 V ac

3.3 Environmental specifications. Fuses supplied to this CID shall be subject to the following tests and there shall be no electrical or mechanical damage to the fuse.

3.3.1 Operating temperature. The operating temperature shall be -55°C to +125°C.

3.3.2 Shock. Fuses shall meet shock requirements in accordance with method 213, MIL-STD-202, test condition I (100 g's peak for 6 milliseconds).

3.3.3 Vibration. Fuses shall meet vibration requirements in accordance with method 201, MIL-STD-202, (10 Hz - 55 Hz, (.06 inch maximum total excursion)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

3.3.4 Insulation resistance (after opening). The insulation resistance after opening shall be 10,000 ohms minimum at 100 volts in accordance with method 302, MIL-STD-202, test condition A.

3.3.5 Resistance to soldering heat. Fuses shall meet the resistance to soldering heat requirements in accordance with method 210, MIL-STD-202, test condition B (10 seconds at 260°C).

3.3.6 Thermal shock. Fuses shall meet the thermal shock requirements in accordance with method 107, MIL-STD-202, test condition B (-65°C to +125°C).

3.3.7 Moisture resistance. Fuses shall meet the moisture resistance requirements in accordance with method 106, MIL-STD-202, with the exception of no load voltage during this test and step 7 shall not be performed.

3.4 Physical specifications.

3.4.1 Materials. Fuses shall have a molded plastic body with copper terminals.

3.4.2 Soldering parameters. Fuses shall be able to withstand, without electrical or mechanical damage to the fuse, a wave solder of +260°C (+500°F) for 10 seconds maximum, and an infrared solder of +260°C (+500°F) for 30 seconds maximum. Cartridge fuses shall also be able to withstand without damage a vapor phase solder of +215°C (+420°F) for 120 seconds maximum.

3.4.3 Solderability. Fuses shall meet solderability requirements in accordance with method 208 of MIL-STD-202.

TABLE III. Rating versus opening time.

Ampere rating	Opening time characteristics	Percent of ampere rating	Opening time
All ampere ratings	A	100 percent	4 hours, minimum
		200 percent	1 second, maximum
	B	100 percent	4 hours, minimum
		250 percent	5 seconds, maximum

3.5 Marking. Fuses supplied to this CID shall be marked with the manufacturer's (MFGR's) standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55519.

5. PACKAGING. Packaging shall be as specified in A-A-55519. In addition, cartridge fuses may be supplied individually or in a quantity of 500 on a 12 mm (.472 inches) wide tape reel in accordance with EIA 481.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these fuse cartridges to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of document.

Military standards

MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.

(Copies of military standards are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094).

Commercial Item Description

A-A-55519 - Fuse, Cartridge, Surface Mount (SM), General Requirements for.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Other Publications.

ELECTRONICS INDUSTRY ASSOCIATION (EIA)

EIA 481 - Taping of Surface Mount Components for Automatic Placement.

(Applications for copies should be addressed to the Electronics Industry Association, 2500 Wilson Boulevard, Arlington, VA 22201-3834.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.4 Ordering data. Ordering data shall be as specified in A-A-55519.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following MFGRs of commercial products. At the time of CID preparation and coordination, these MFGRs were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved MFGRs or be used to restrict procurement to only the MFGRs shown.).

MFGR's CAGE	MFGR's name and address
61935	Schurter, Incorporated 1016 Clegg Court Petaluma, CA 94954 (707) 778-6311
71400	Bussmann P.O. Box 14460 St. Louis, MO 63178-4460 (314) 394-2877
75915	Littelfuse, Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 (847) 824-0400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

6.6 Part number supersession data. This CID supersedes the following MFGR's part numbers as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

CID dash number (see table I) AA55519/03-	MFGR's CAGE	MFGR's PIN 1/	MFGR's CAGE	MFGR's PIN 1/
001A	61935	3404.0003.11	75915	459.062
001B	71400	SFT-63ma	---	---
002A	61935	3404.0049.11	75915	459.125
002B	71400	SFT-125ma	---	---
003A	61935	3404.0006.11	75915	459.250
003B	71400	SFT-250ma	---	---
004A	61935	3404.0044.11	75915	459.375
004B	71400	SFT-375ma	---	---
005A	61935	3404.0045.11	75915	459.500
005B	71400	SFT-500ma	---	---
006A	61935	3404.0046.11	75915	459.750
006B	71400	SFT-750ma	---	---
007A	61935	3404.0009.11	75915	459001
007B	71400	SFT-1A	---	---
008A	61935	3404.0047.11	75915	45901.5
008B	71400	SFT-1.5A	---	---
009A	61935	3404.0012.11	75915	459002
009B	71400	SFT-2A	---	---
010A	61935	3404.0013.11	75915	45902.5
010B	71400	SFT-2.5A	---	---
011A	61935	3404.0014.11	75915	459003
011B	71400	SFT-3A	---	---

1/ The manufacturer (MFGR) PIN shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

6.6 Part number supersession data - continued.

CID dash number (see table I) AA55519/03-	MFGR's CAGE	MFGR's PIN 1/	MFGR's CAGE	MFGR's PIN 1/
012A	61935	3404.0015.11	75915	45903.5
012B	71400	SFT-3.5A	---	---
013A	61935	3404.0016.11	75915	459004
013B	71400	SFT-4A	---	---
014A	61935	3404.0017.11	75915	459005
014B	71400	SFT-5A	---	---

1/ The MFGR PIN shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

6.7 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CM, 3990 East Broad Street, Columbus, OH 43216-5000, or telephone (614) 692-7884.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5920-0530-03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.