[INCH-POUND]
A-A-55523
April 28, 1997
SUPERSEDING
MIL-P-20636F
25 March 1981

COMMERCIAL ITEM DESCRIPTION

POSTS, FENCE: DRIVE-TYPE, SPADELESS

The General Services Administration has authorized the use of this Commercial Item Description (CID), for all federal agencies.

1. SCOPE. This CID covers drive-type, spadeless fence posts intended for use in providing framework and support for erecting military barbed wire entanglements and fencing, referred to herein as "posts."

2. CLASSIFICATION. The posts shall conform to the following sizes:

Size 1 - 96 inches overall length.
Size 2 - 72 inches overall length.
Size 3 - 60 inches overall length.
Size 4 - 32 inches overall length.
Size 5 - 24 inches overall length.

3. SALIENT CHARACTERISTICS

3.1 Design and construction. The posts shall be designed and constructed in accordance with the manufacturer's specifications for fence posts. Figures 1 through 3 illustrate how this item was previously manufactured. Any posts procured to this CID shall meet or exceed the performance exhibited by posts manufactured in accordance with figures 1 through 3.

3.2 Materials. The posts shall be sound and free from defects and shall be constructed from steel conforming to ASTM A569 or A659, rerolled rail steel, or any other material with equivalent properties.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Defense Logistic Agency, Defense Supply Center Columbus, ATTN: DSCC-VAI, Columbus, OH, 43216-5000

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

3.2.1 Thickness. Posts constructed from steel shall be have a nominal thickness of 0.125 inch for steels having a yield of 33,000 pounds per square inch (psi) or less, and 0.100 inch for steels having a yield more than 33,000 psi. If the posts are constructed from other materials, the thickness shall be such that it meets or exceeds the performance of the steel posts.

3.3 Cleaning, treatment, and coloring.

3.3.1 Cleaning and treatment. Unless otherwise specified in the contract order (see 7.3), the posts shall be cleaned and treated in accordance with the manufacturer's standard cleaning and treatment practices prior to painting.

3.3.2 Coloring. Unless otherwise specified in the contract order (see 7.3), the posts shall be colored forest green.

3.4 Interchangeability. Emphasis shall be placed on dimensional tolerances. All parts having the same part number shall be capable of exchange without loss of functional or physical characteristics.

3.5 Identification marking. Fence posts shall be permanently and legibly marked in a location that is readily accessible. The markings shall include, at a minimum, the Part Identifying Number (PIN), and the manufacturer's identification (see 7.1 and 7.3).

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections and tests.

5.2 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.3 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Desscription, and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING.

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3).

7. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

7.1 PIN. The PINs to be used for posts acquired to this CID are created as follows:

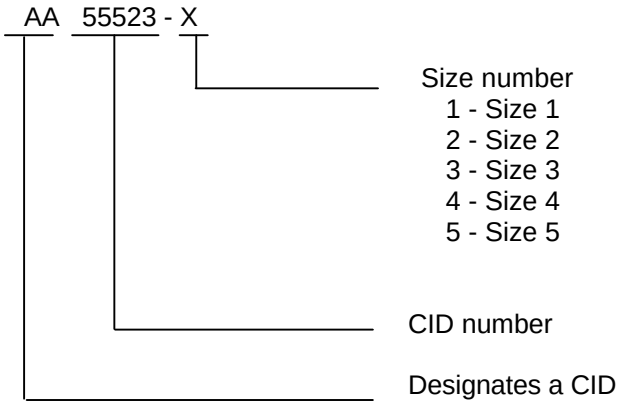

7.2 Addresses for obtaining copies of referenced documents.

7.2.1 Government documents. Copies of The Code of Federal Regulations (CFR) are available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.2.2 DoD adopted documents. Copies of ASTM A569 “Steel, Carbon (0.15 Maximum, Percent), Hot-Rolled Sheet and Strip Commercial Quality” and A659 “Steel, Carbon (0.16 Maximum to 0.25 Maximum Percent), Hot-Rolled Sheet and Strip, Commercial Quality” are available from American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.3 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of the Department of Defense Index of Specifications and Standards (DoDISS) to be cited in the solicitation and, if required, the specific issue of individual documents referenced.
c. PIN and quantity required (see 3.5 and 7.1).
d. Cleaning, if other than specified (see 3.3.1).
e. Treatment, if other than specified (see 3.3.1).
f. Coloring, if other than specified (see 3.3.2).
g. Selection of applicable level and packaging requirements (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

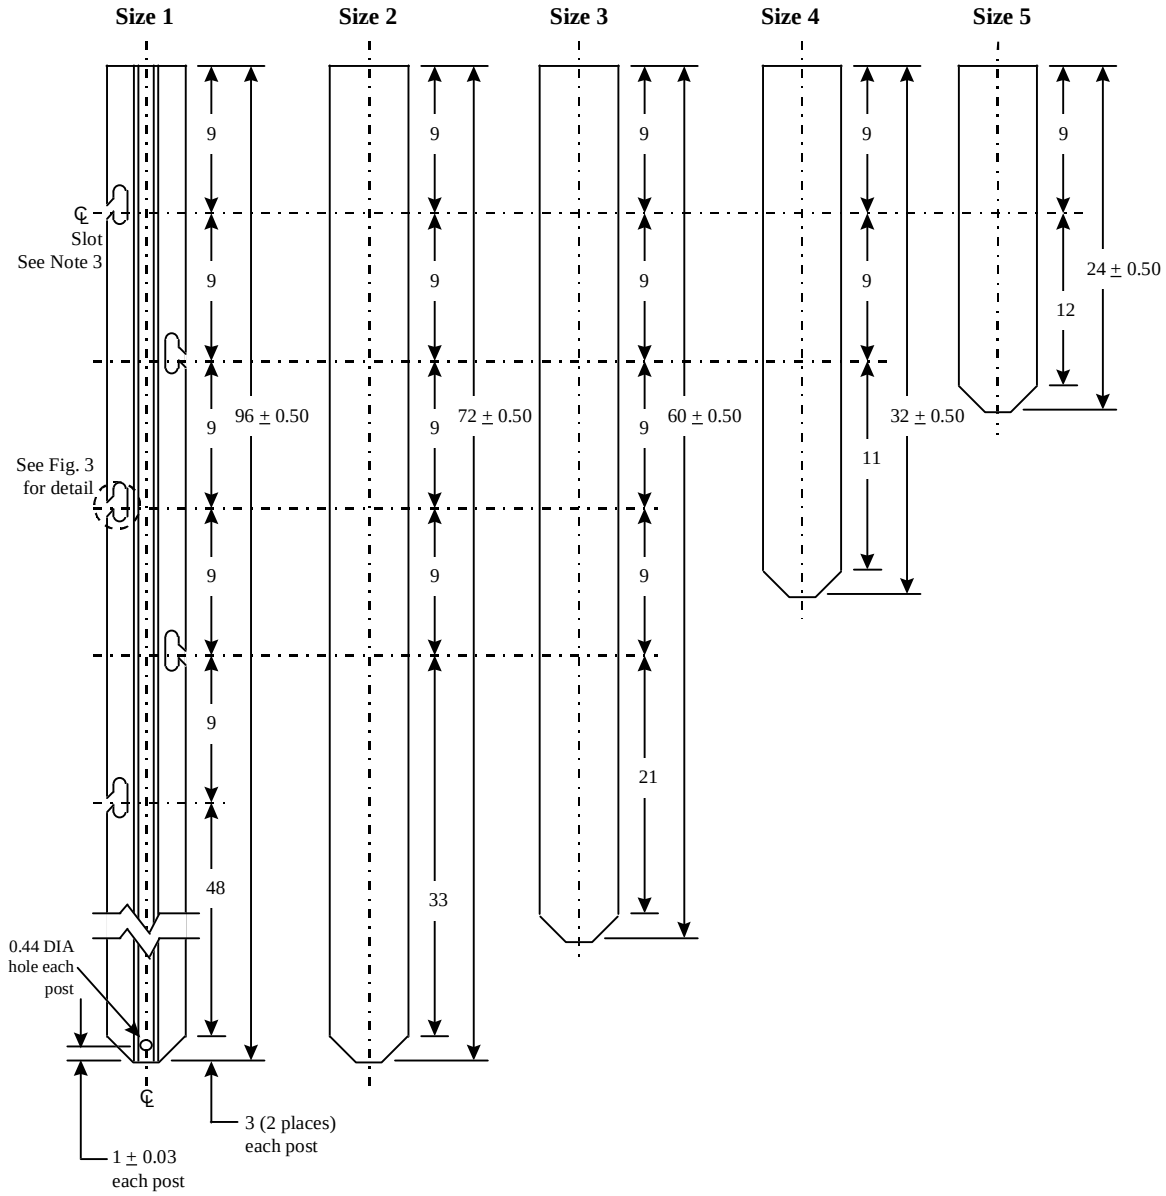

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.25 and should not be cumulative.
3. Size 1 has slots in 5 places; Size 2 has slots in 4 places; Size 3 has slots in 3 places; Size 4 has slots in 2 places; and Size 5 has slot in 1 place.

FIGURE 1. Fence posts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

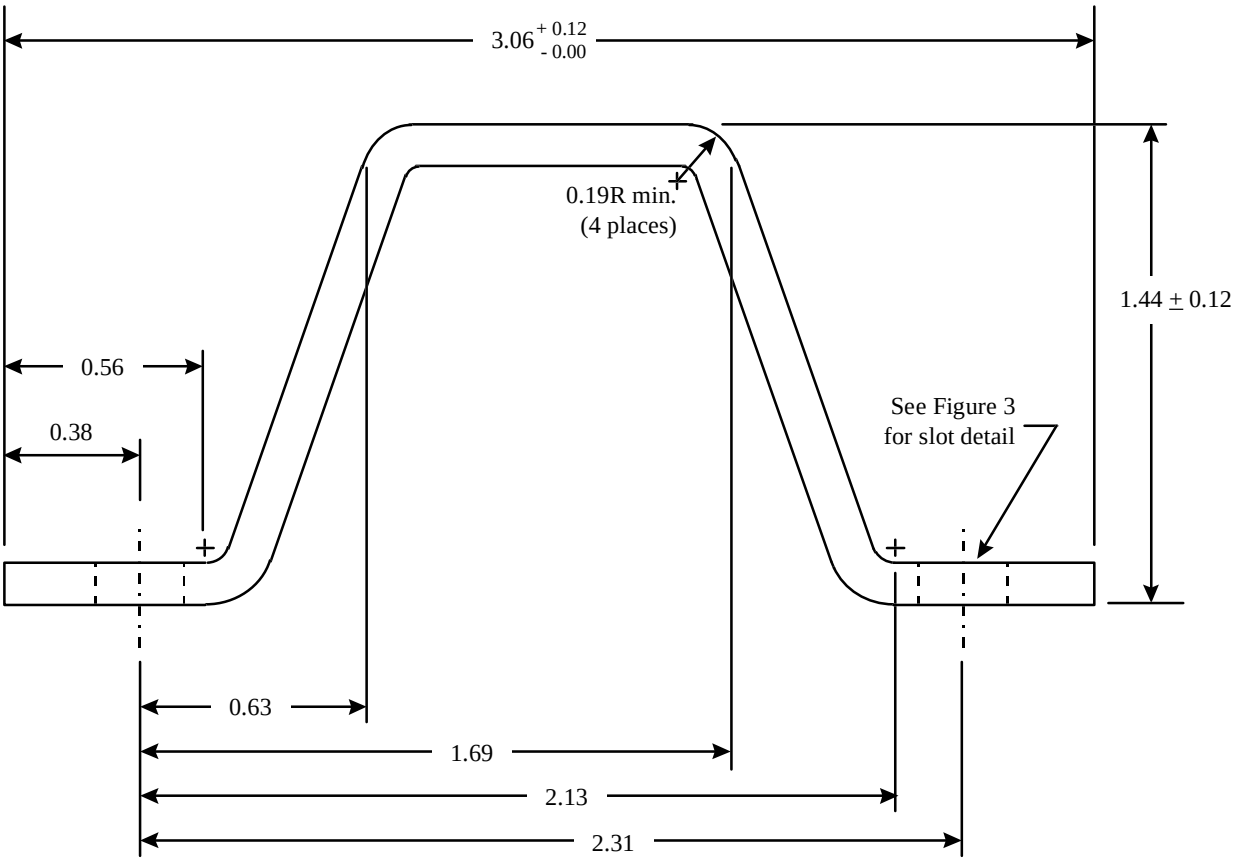

NOTES:
1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ± 0.03.
3. Thickness will be as specified (see 3.2.1).

FIGURE 2. Fence post cross section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

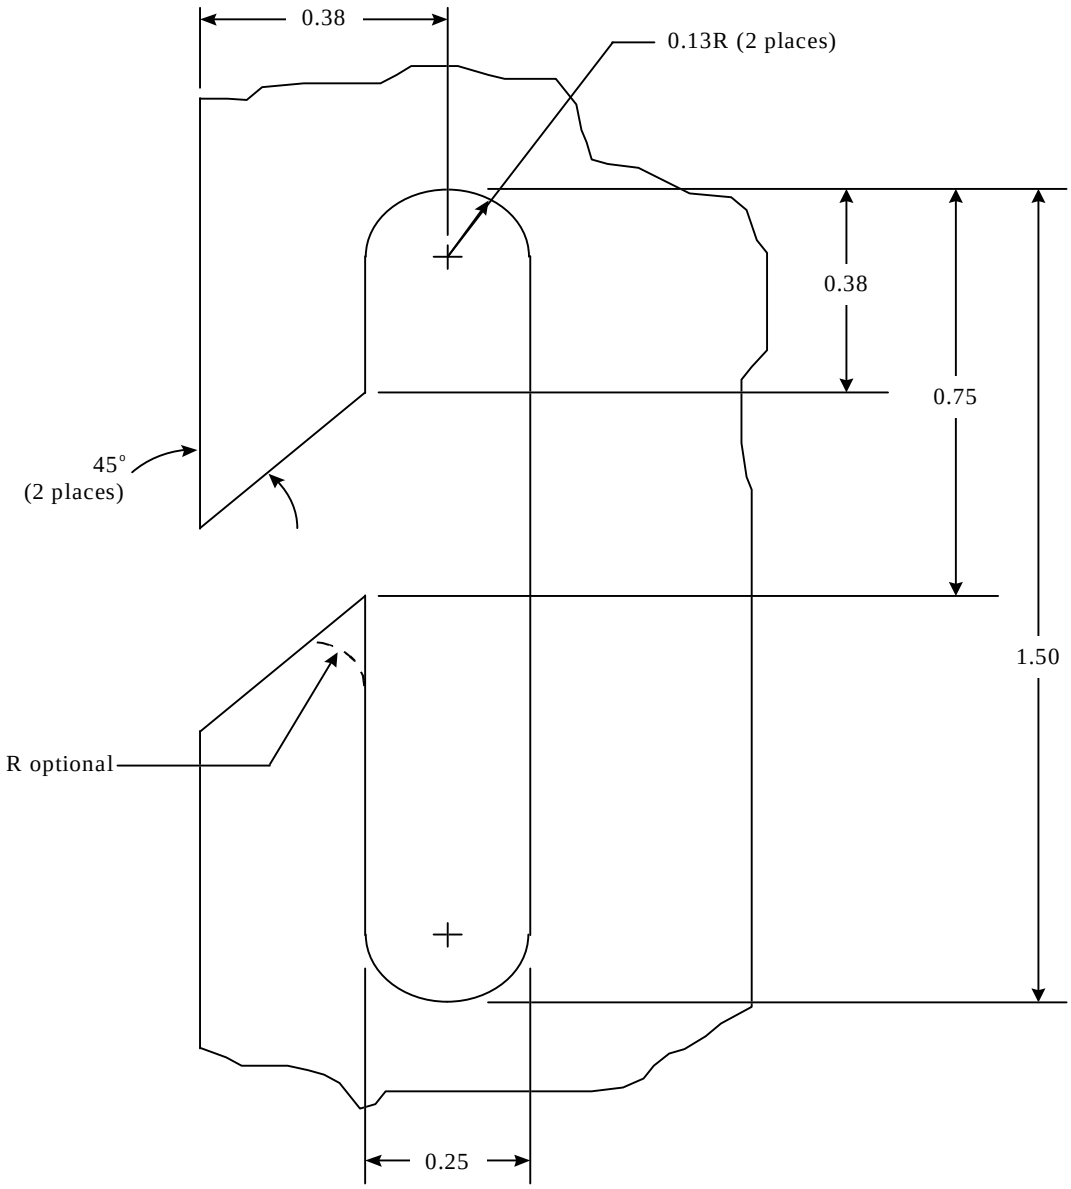

NOTES:
1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ± 0.03.
3. Thickness will be as specified (see 3.2.1).

FIGURE 3. Fence post slot detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD1
Air Force - 99

Review Activities:
Army - CE
Navy - MC
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
DLA - CC

(Project 5660-0103)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.