[INCH-POUND]
A-A-55534/2D
7 July 2023
SUPERSEDING
A-A-55534/2C
28 June 2018

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

RESISTOR, FIXED, CHIP, METAL ELEMENT, (POWER TYPE), VERY LOW VALUES STYLE VLV1206

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

Inactive for new design after 28 June 2018.
For replacement purposes only. For new design use DLA Land and Maritime drawing 06009.

The complete requirements for procuring of a fixed, chip, metal element, resistor described herein shall consist of this document and the issue in effect of A-A-55534.

CLASSIFICATION OR PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA55534/02-R010FB

AA55534	-	Abbreviated CID number
/02-	-	Applicable CID sheet (two digits)
R010	-	Resistance value
F	-	Resistance tolerance
B	-	Termination finish

NOTE: This PIN has been derived in accordance with A-A-55534.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Resistors supplied to this CID specification sheet shall meet the interface and physical dimensions as specified herein (see figure 1).


Resistance value. The resistance value shall be 0.007 ohms to 0.25 ohms.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990, or emailed to Resistor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

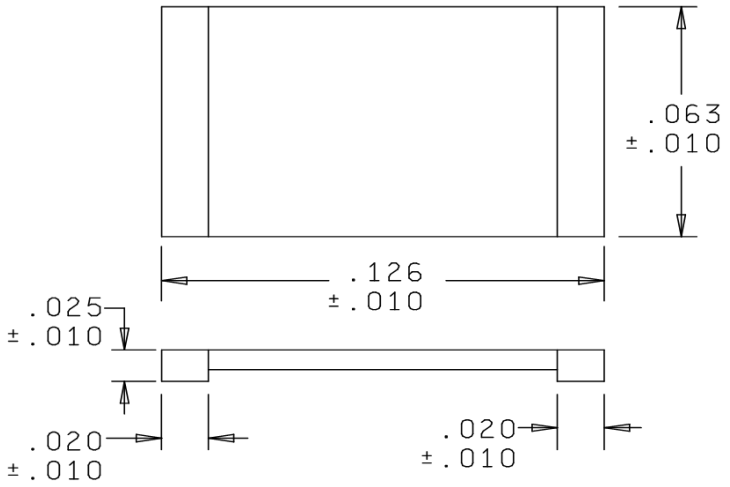

Inches	mm	Inches	mm	Inches	mm
0.010	0.25	0.025	0.64	0.126	3.20
0.020	0.51	0.063	1.60		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The picturization of the style above is given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope and do not alter the functional aspects of the device, are acceptable.

FIGURE 1. Resistors, fixed, chip, metal element, (style VLV1206).

Resistance tolerance. This style resistor is available in resistance tolerances F (±1 percent), H (±3 percent), and J (±5 percent).

Termination finish. The termination finish shall be identified by a single letter, B for tin/lead (Sn/Pb) (3 percent lead minimum) or T (Sn) for (100 percent tin).

Power rating. The power rating shall be 0.25 watt at +70°C. The power rating shall be linearly derated to zero at +150°C or +175°C (see Commercial products).

Temperature coefficient. The temperature coefficient of resistance shall not exceed ±400 ppm/°C from -55°C to +150°C or +175°C.

Marking. Resistors supplied to this CID specification sheet shall be marked with the manufacturer's standard commercial PIN. Marking of individual small devices (e.g. chips) is not required but is permitted; however, each unit pack supplied to this CID shall be marked with the commercial item description PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See Classification section for PIN format.

Source of documents.

Commercial Item Description

A-A-55534	-	Resistor, Fixed, Power Type (Very Low Resistance Values), General Requirements For

(Copies of commercial item descriptions are available online at https://quicksearch.dla.mil.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
91637	Dale Electronics, Incorporated 1122 23rd St. Columbus, NE 68601-0609 Dale Israel, Ltd. Emek-Sara Industrial Zone 3, Ha'Kotzer str. Be'er Sheva, Israel 84 874 Phone: 402-563-6866 Fax: 402-563-6296 Email: business-americas@vishay.com Website: www.vishay.com
57027	TT Electronics / IRC 4222 S. Staples St. Corpus Christi, TX 78411-2702 Phone: 972-323-2200 Email: http://www.ttelectronics.com/ Website: www.ttelectronics.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the MFGR's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

CID PIN	MFGR's CAGE	MFGR's P/N 1/	MFGR's SALIENT CHARACTERISTICS
AA55534/02-******	91637	WSL 1206	Resistance value 0.007 ohms to 0.25 ohms, temp coefficient ±75ppm/^{O}C, Derated to zero at +175°C Resistance tolerance F, H, and J,
AA55534/02-******	57027	LR1206	Resistance Value: 0.050 ohms to 0.250 ohms, temp coefficient ±100 ppm/^{O}C; 0.020 ohms to 0.049 ohms, temp coefficient ±300 ppm/^{O}C; 0.010 ohms to 0.019 ohms, temp coefficient ±400 ppm/^{O}C; Derated to zero at +150°C; Resistance tolerance - F, H, and J.

1/ The manufacturers P/N shall not be used for acquisition to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of A-A-55534.

National Stock Number. This section is not applicable to this CID.

Changes from previous issue. The margins of this CID are marked with a vertical line to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodian
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing Activity:

DLA - CC

Project 5905-2023-019

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.