[INCH-POUND]
A-A-55534/7B
24 April 2003
SUPERSEDING
A-A-55534/7A
23 December 2002

COMMERCIAL ITEM DESCRIPTION

# RESISTORS, FIXED, CHIP, VERY LOW VALUES (POWER TYPE), STYLE VLV2010

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for style VLV2010 wirewound or metal element, chip, power type, fixed resistors. The resistors covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN). The PIN shall be AA55534/07- (plus a coded number) as shown in the following example.

| AA55534/07 | - | R010 | F | B |
|---|---|---|---|---|
| CID number | | Resistance value (see 3.2) | Resistance tolerance (see 3.3) | Termination finish (see 3.4) |

NOTE: This PIN has been derived in accordance with A-A-55534.

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. The resistors supplied to this CID shall meet the interface and physical dimensions as specified herein (see figure 1).

3.2 Resistance value. The resistance value shall be 0.007 ohm to 0.5 ohm.

3.3 Resistance tolerance. This style resistor is available in resistance tolerances F, H, and J (±1 percent, ±3 percent, and ±5 percent respectively).

3.4 Termination finish. The termination finish shall be identified by a single letter, B for tin/lead (Sn/Pb) (3 percent lead minimum) or T (Sn) (100 percent tin).

3.5 Power rating. The power rating shall be 0.5 watt at +70°C. The power rating shall be linearly derated to zero at +150°C or +175°C (see 7.5).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, PO Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0553, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5905

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

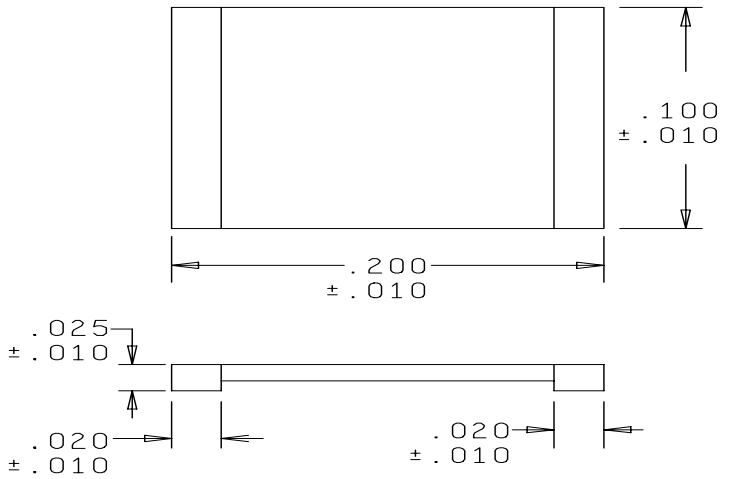


| Inches | mm | Inches | mm |
|---|---|---|---|
| 0.010 | 0.25 | 0.100 | 2.54 |
| 0.020 | 0.51 | 0.200 | 5.08 |
| 0.025 | 0.64 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The picturization of the style above is given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope and do not alter the functional aspects of the device, are acceptable.

FIGURE 1. Resistors, fixed, chip, very low values (style VLV2010).

3.6 Temperature coefficient. The temperature coefficient of resistance shall not exceed ±400ppm/°C from -55°C to +150°C or 175°C (see 7.5).

3.7 Marking. Resistors supplied to this CID shall be marked with the manufacturers (MFGR) standard commercial PIN. Marking of individual small devices (e.g. chips) is not required but is permitted; however, each unit pack supplied to this CID shall be marked with the MFGR standard commercial PIN.

4. REGULATORY REQUIREMENTS. This section is not applicable to this CID sheet.

5. PRODUCT CONFORMANCE PROVISIONS. Product conformance provisions shall be as specified in A-A-55534.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

6. PACKAGING. Packaging shall be as specified in A-A-55534.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these resistors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

Commercial Item Description

A-A-55534 - Resistor, Fixed, Power Type (Very Low Resistance Values), General Requirements For.

(Copies of commercial item descriptions are available from the Document Automation and Production Service (DAPS), Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

7.4 Ordering data. Ordering data shall be as specified in A-A-55534.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following MFGR's of commercial products. At the time of CID preparation and coordination, these MFGR's were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved MFGR's or be used to restrict procurement to only the MFGR's shown.)

TABLE I. Commercial products.

| CID PIN | MFRG CAGE | MFGR name and address |
|---|---|---|
| AA55534/07-******<br><br>Resistance value 0.007 ohm to 0.5 ohm, resistance tolerance F, H, and J, temp coefficient ±75ppm, derated to zero at 175°C. | 91637 | Dale Electronics, Incorporated<br>1122 23rd St.<br>Columbus, NE 68601-0609<br><br>Dale Israel, Ltd.<br>Emek-Sara Industrial Zone<br>3, Ha'Kotzer str.<br>Be'er Sheva, Israel 84 874 |
| Res. value 0.050 ohm to 0.500 ohm, temp coefficient ±100ppm; res. value 0.020 ohm to 0.049 ohm, temp coefficient ±300ppm; res. value 0.010 ohm to 0.019 ohm, temp coefficient ±400ppm; derated to zero at 150°C; res. Tol. F, H, and J. | 57027 | TT Electronics / IRC<br>4222 S. Staples St.<br>Corpus Christi, TX 78411-2702 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

7.6 Part number (P/N) supersession data. This CID supersedes the MFGR's style as shown below. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

| MFGR's CAGE | MFGR's style 1/ |
|---|---|
| 91637<br>57027 | WSL 2010<br>LR2010 |

1/ The MFGR's style shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

7.7 Government users. To acquire information on obtaining these resistors from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CPBC, PO Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7678.

MILITARY INTERESTS:

Custodian
Navy - EC
DLA-CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:
DLA-CC

Project 5905-1694-02



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.