[INCH-POUND]
A-A-59440/2A
23 May 2005
SUPERSEDING
A-A-59440/2
13 August 1999

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

COCK, DRAIN, WITH HOSE BIB, 150 P.S.I., NON-FLAMMABLE LIQUID OR GAS, NPTF-1 THREADS

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

The complete requirements for procuring the cock, drain, with hose bib, 150 psi, non-flamable liquid or gas, NTF-1 threads described herein shall consist of this document and the issue in effect of CID A-A-59440.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA59440	/2	-	002	C or blank
CID number	Applicable CID sheet (two digits)		Dash number (see figure 1)	Handle plating (see figure 1)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Cock, drain, with hose bib, 150 psi, non-flamable liquid or gas, NTF-1 threads supplied to this CID shall be as specified herein (see figure 1).

Sizes. Nominal sizes of 1/8 inch through 1/4 inch with NPTF-1 threads are covered by this CID.

Intended applications. These items are for use in non-flammable liquid or gas systems where pressures do not exceed 150 psig (10.34 bar) for Water, Oil and Gas, (WOG) at 150°F (66°C).

Permissible variations in dimensions. The table in figure 1 lists the permissible variation in dimensions for each size. The external dimensions of the cocks should not limit procurement unless the end item applications restrict these dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Threads. Threads are Dryseal NPTF-1 in accordance with CID A-A-59440.

Materials.

Brass. Brass shall be in accordance with the following commercial standards:

ASTM B16	ASTM B121	ASTM B427	SAE AMS 4842
ASTM B22	ASTM B124	ASTM B505	SAE AMS 4845
ASTM B30	ASTM B148	ASTM B584	SAE AMS 4855
ASTM B36	ASTM B176	ASTM B633	SAE AMS 4860
ASTM B61	ASTM B271	ASTM B763	SAE AMS 4862
ASTM B62	ASTM B369	ASTM B770	SAE AMS 4890
		ASTM B806	

Handle. Handle may be hot rolled or cold rolled steel conforming to QQ-S-698 or another commonly accepted industry standard.

Protective coating:

a. Brass: None.
b. Carbon steel:
   (1) Cadmium in accordance with SAE AMS-QQ-P-416, type II, class 2.
   (2) Zinc in accordance with ASTM B633, type II, 12.7 µm (50 microinches) minimum.

Test pressures:

a. Shell: 150 psig (10.3 bar)
b. Seat: 50 psig (3.45 bar)

Valve bodies. Valve bodies shall be provided with hexagonal wrenching surfaces.

Valve stem. Drain cocks shall be designed to prevent the valve stem from being inadvertently removed.

Optional designs. Figure 1 is for identification purposes only and is not intended to restrict designs or shapes not dimensioned

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to CID. See classification information for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Source of documents

FEDERAL SPECIFICATION

QQ-S-698	-	Steel, Sheet and Strip, Low Carbon

COMMERCIAL ITEM DESCRIPTION

A-A-59440	-	Cocks, Drain, Cocks, Plug, and Cocks, Shutoff, Screw Stem; Brass, NPT and NPTF-1 Threads, General Requirements For

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Other Publications

ASTM INTERNATIONAL

ASTM B16	-	Rod, Brass, Free-Cutting, Bar and Shapes for use in Screw Machines
ASTM B22	-	Castings, Bronze, for Bridges and Turntables
ASTM B30	-	Copper Alloys in Ingot Form
ASTM B36	-	Plate, Brass, Sheet, Strip, and Rolled Bar
ASTM B61	-	Castings, Steam or Valve Bronze
ASTM B62	-	Metal Castings, Composition Bronze or Ounce
ASTM B121	-	Plate, Leaded Brass, Sheet, Strip, and Rolled Bar
ASTM B124	-	Copper and Copper Alloy Forging Rod, Bar, and Shapes
ASTM B148	-	Aluminum-Bronze Sand Castings
ASTM B176	-	Die Castings, Copper-Alloy
ASTM B271	-	Copper-Base Alloy Centrifugal Castings
ASTM B369	-	Copper-Nickel Alloy Castings
ASTM B427	-	Standard Specification for Gear Bronze Alloy Castings
ASTM B505	-	Castings, Copper Alloy, Continuous
ASTM B584	-	Castings, Copper Alloy Sand, for General Applications
ASTM B633	-	Zinc on Iron and Steel, Electrodeposited Coatings of
ASTM B763	-	Copper Alloy Sand Castings for Valve Application
ASTM B770	-	Copper-Beryllium Alloy Sand Castings for General Applications
ASTM B 806	-	Copper Alloy Permanent Mold Castings for General Applications

(Copies of these documents are available from http://www.astm.org or ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, Pennsylvania, USA 19428-2959.)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

SAE INTERNATIONAL

SAE-AMS-QQ-P-416	-	Plating, Cadmium (Electrodeposited)
SAE AMS4842	-	Castings, Leaded Bronze, Sand and Centrifugal 80CU - 10SN - 9.5PB as Cast
SAE AMS4845	-	Tin Bronze Castings, Sand and Centrifugal 87.5CU - 10SN - 2ZN as Cast
SAE AMS4855	-	Leaded Red Brass, Sand and Centrifugal Castings 85CU - 5.0SN - 5.0PB - 5.0ZN as Cast
SAE AMS4860	-	Manganese Bronze, Sand and Centrifugal Castings 58CU - 39ZN - 1.2FE - 1.0AL - 0.80MN as Cast
SAE AMS4862	-	Manganese Bronze, Sand and Centrifugal Castings 63CU - 24ZN - 6.2AL - 3.8MN - 3.0FE High Strength, as Cast
SAE AMS4890	-	Copper-Beryllium Alloy Castings 97CU - 2.1BE - 0.52CO - 0.28SI Solution Heat Treated (TBOO)

(Copies of these documents are available from http://www.sae.org/ or SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

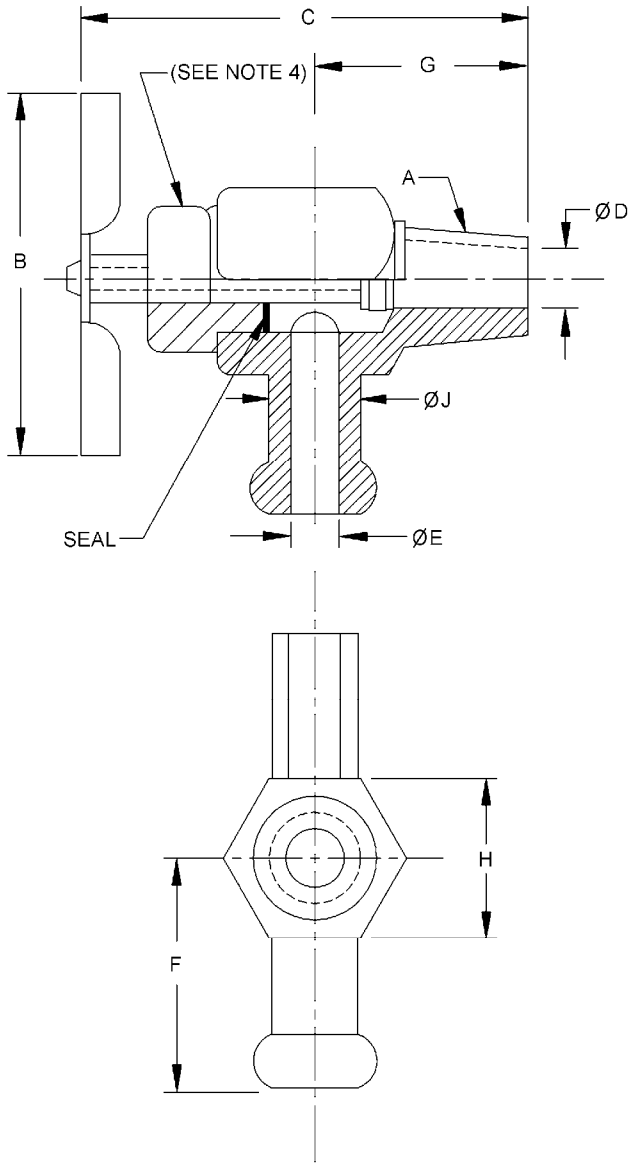

Dash No.	Handle plating	A 5/ pipe thread NPTF-1	B max (mm)	C open max (mm)	D dia min	E dia + .03 -.06 (+0.8 mm) (-1.5 mm)	F max (mm)	G max	H ±.015 (0.38 mm)	J dia Max (mm)
009	Zinc	1/8-27	1.38 (35.1)	1.88 (47.8)	.19 (4.8)	.25 (6.4)	.88 (22.4)	.78 (19.8)	.56 or .62 (14.2 or 15.7)	.34 (8.6)
009C	Cadmium	1/8-27								
010	Zinc	1/4-18	1.38 (35.1)	2.00 (50.8)	.22 (5.6)	.25 (6.4)	.88 (22.4)	.78 (19.8)	.56 or .62 (14.2 or 15.7)	.34 (8.6)
010C	Cadmium	1/4-18								

FIGURE 1. Dimensions and configuration cock, drain, with hose bib.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ± .010 inch (0.25 mm).
4. Diameter of hole shall be adequate to allow drainage through the valve.
5. Thread "A" shall be a modified NPTF-1, the effective NPTF-1 thread is shortened by one thread on the small end.

FIGURE 1. Dimensions and configuration cock, drain, with hose bib - Continued.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
79470	Eaton Corp 14615 Loneoak Rd. Edenperry, MN 55344 952-294-2032/888-258-0222 jeffenoe@eaton.com
93061	Parker-Hannifin Corp Brass Products Division 300 Parker Drive Otsego, MI 49708-1472 260-636-2104 dwsanders@Parker.com

Military Standard (MS) replacement data. This CID replaces the following Military Standard as shown in table I.

TABLE I. MS supersession data.

CID 1/	Superseded MS
AA59440/1-009	MS35783-1
AA59440/1-009C	MS35783-1
AA59440/1-010	MS35783-2
AA59440/1-010C	MS35783-2

1/ These parts were originally listed in MS35783 as a single part type. Due to special handling/disposal and corrosion resistance requirements the parts have been separated in this CID.

Part number (P/N) supersession data. These CID P/N's supersede the following MFR's P/Ns as shown in table II. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

TABLE II. P/N supersession data

Dash number (see table I)	MFR's CAGE	MFG's P/N 1/
AA59440/1-009	01276	131-16667
AA59440/1-009C		
AA59440/1-010	01276	131-16680
AA59440/1-010C		

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see the marking paragraph.

National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID. The list in table III is for information only and may not be indicative of all possible NSN's associated with the CID. For up to date information on assigned NSN's please contact the aforementioned DSCC office (see A-A-59440).

TABLE III. NSN's

Dash number (see figure 1) AA59440/2-	NSN
010	4820-00-845-1096

Government users. To acquire information on obtaining these cocks from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-NAB, P.O. BOX 3990, Columbus, OH 43218-3990, or telephone (614) 692-2271 or (614) 692-3191.

Marginal notations. Marginal notations are not used in this revision to identify changes due to the extent of the changes.

MILITARY INTERESTS:

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Army - AT, AV, CR4, MI
Navy - MC

CIVIL AGENCY AND COORDINATING ACTIVITIES:

GSA - FSS

Preparing activity

DLA - CC

Project 4820-0882-000

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.