INCH-POUND]
A-A-59440/4A
23 May 2005
SUPERSEDING
A-A-59440/4
13 August 1999

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

COCK, DRAIN, GROUND KEY, 150 P.S.I., BRASS, STEAM PRESSURE, NPTF-1 THREADS

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

The complete requirements for procuring cock, drain, ground key, 150 psi, brass, steam pressure, NPTF-1 threads described herein shall consist of this document and the issue in effect of CID A-A-59440.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA59440	/4	-	014
CID number	Applicable CID sheet (two digits)		Dash number (see figure 1)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Cock, drain, ground key, 150 psi, brass, steam pressure, NPTF-1 threads supplied to this CID shall be as specified herein (see figure 1).

Sizes. Nominal sizes of 1/8 inch through 1/2 inch with NPTF-1 threads.

Intended applications. This item is for use in steam systems where pressures do not exceed 150 psig (10.3 bar) at 351°F (177.2°C) and the liquid or gas is compatible with brass.

Permissible variations in dimensions. Figure 1 lists the permissible variation in dimensions for each size. The external dimensions of the cocks should not limit procurement unless the end item applications restrict these dimensions.

Optional designs. The illustration is for identification purposes only is not intended to restrict designs or shapes not dimensioned.

Valve bodies. Valve bodies shall be provided with hexagonal wrenching surfaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Threads. Threads are Dryseal NPTF-1 in accordance with CID A-A-59440.

Material.

Material body, handle, stem, and screw. Body, handle, stem, and screw shall be brass in accordance with the following commercial standards:

ASTM B16	ASTM B121	ASTM B369	SAE AMS 4842
ASTM B22	ASTM B124	ASTM B505	SAE AMS 4845
ASTM B30	ASTM B148	ASTM B584	SAE AMS 4855
ASTM B36	ASTM B176	ASTM B763	SAE AMS 4860
ASTM B61	ASTM B271	ASTM B770	SAE AMS 4862
ASTM B62			SAE AMS 4890

Preferred valve body material. Preferred valve body material is brass in accordance with ASTM B61.

Protective coating.

Brass: None

Test pressures.

a. Shell 300 psig (20.7 bar).
b. Seat 150 psig (10.3 bar).

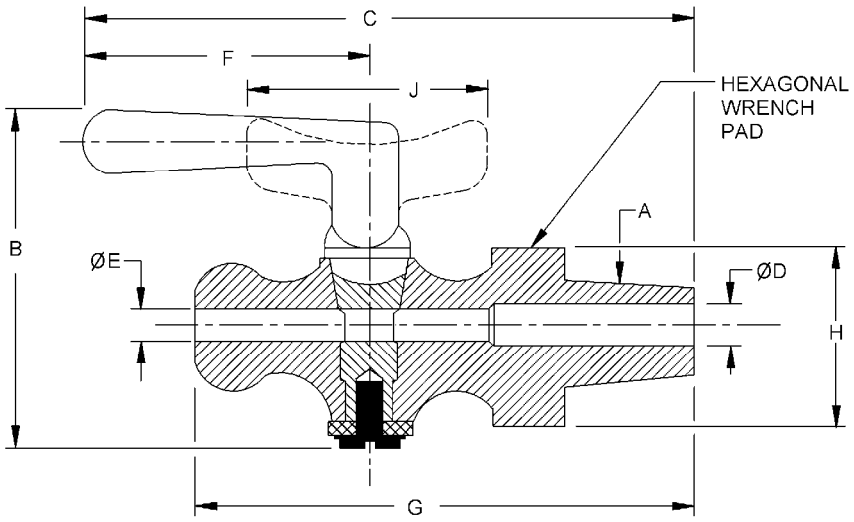


FIGURE 1. Cock, drain, ground key.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Lever handle.

Dash number	A pipe thread NPTF-1	B max (mm)	C max (mm)	D dia min (mm)	E dia min (mm)	F max (mm)	G max (mm)	H across flats ±.015 (0.38 mm)
014	1/8-27	1.47 (43.7)	2.25 (57.2)	.16 (4.1)	.16 (4.1)	1.22 (30.1)	1.72 (2.5)	.50 or .56 (12.7 or 14.2)
015	1/4-18	1.66 (42.2)	2.56 (65.0)	.19 (4.8)	.16 (4.1)	1.41 (35.8)	1.97 (2.5)	.56 or .62 (14.2 or 15.7)
016	3/8-18	1.88 (47.8)	3.12 (79.3)	.25 (2.5)	.22 (5.6))	1.72 (43.7)	2. 34 (59.4)	.69 or .81 (17.5 or 20.6)
017	1/2-14	2.44 (62.0)	3.94 (100.1)	.38 (9.7)	.28 (7.1)	2.16 (54.9)	2.88 (73.2)	.94 or 1.00 (23.9 or 25.4)

Tee handle.

Dash Number	A pipe thread NPTF-1	B max (mm)	D dia min (mm)	E dia min (mm)	G max (mm)	H across flats ±.015 (0.38 mm)	J max (mm)
018	1/8-27	1.47 (43.7)	.16 (4.1)	.16 (4.1)	1.72 (2.5)	.50 or .56 (12.7 or 14.2)	.97 (24.6)
019	1/4-18	1.66 (42.2)	.19 (4.8)	.16 (4.1)	1.97 (2.5)	.56 or .62 (14.2 or 15.7)	1.09 (27.7)
020	3/8-18	1.88 (47.8)	.25 (2.5)	.22 (5.1)	2.34 (59.4)	.69 or .81 (17.5 or 20.6)	1.22 (31.0)

FIGURE 1. Cock, drain, ground key - Continued

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ± .010 inch (0.25 mm).

FIGURE 1. Cock, drain, ground key - Continued.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Source of documents.

COMMERCIAL ITEM DESCRIPTION

A-A-59440 - Cocks, Drain, Cocks, Plug, and Cocks, Shutoff, Screw Stem; Brass, NPT and NPTF-1 Threads, General Requirements For

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Other Publications

ASTM INTERNATIONAL

ASTM B16	-	Rod, Brass, Free-Cutting, Bar and Shapes for use in Screw Machines
ASTM B22	-	Castings, Bronze, for Bridges and Turntables
ASTM B30	-	Copper Alloys in Ingot Form
ASTM B36	-	Plate, Brass, Sheet, Strip, and Rolled Bar
ASTM B61	-	Castings, Steam or Valve Bronze
ASTM B62	-	Metal Castings, Composition Bronze or Ounce
ASTM B121	-	Plate, Leaded Brass, Sheet, Strip, and Rolled Bar
ASTM B124	-	Copper and Copper Alloy Forging Rod, Bar, and Shapes
ASTM B148	-	Aluminum-Bronze Sand Castings
ASTM B176	-	Die Castings, Copper-Alloy
ASTM B271	-	Copper-Base Alloy Centrifugal Castings
ASTM B369	-	Copper-Nickel Alloy Castings
ASTM B505	-	Castings, Copper Alloy, Continuous
ASTM B584	-	Castings, Copper Alloy Sand, for General Applications
ASTM B763	-	Copper Alloy Sand Castings for Valve Application
ASTM B770	-	Copper-Beryllium Alloy Sand Castings for General Applications

(Copies of these documents are available from http://www.astm.org or ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, Pennsylvania, USA 19428-2959.)

SAE INTERNATIONAL

SAE AMS4842	-	Castings, Leaded Bronze, Sand and Centrifugal 80CU - 10SN - 9.5PB as Cast
SAE AMS4845	-	Tin Bronze Castings, Sand and Centrifugal 87.5CU - 10SN - 2ZN as Cast
SAE AMS4855	-	Leaded Red Brass, Sand and Centrifugal Castings 85CU - 5.0SN - 5.0PB - 5.0ZN as Cast
SAE AMS4860	-	Manganese Bronze, Sand and Centrifugal Castings 58CU - 39ZN - 1.2FE - 1.0AL - 0.80MN as Cast
SAE AMS4862	-	Manganese Bronze, Sand and Centrifugal Castings 63CU - 24ZN - 6.2AL - 3.8MN - 3.0FE High Strength, as Cast
SAE AMS4890	-	Copper-Beryllium Alloy Castings 97CU - 2.1BE - 0.52CO - 0.28SI Solution Heat Treated (TBOO)

(Copies of these documents are available from http://www.sae.org/ or SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

MFR's CAGE	MFR's name and address
79470	Eaton Corp 14615 Loneoak Rd. Edenperry, MN 55344 952-294-2032/888-258-0222 jeffenoe@eaton.com
93061	Parker-Hannifin Corp Brass Products Division 300 Parker Drive Otsego, MI 49708-1472 260-636-2104 dwsanders@Parker.com
20969	Essex Brass Corp 23500 Pinewood Warren, MI 48091-3122 586-757-8200 bpushman@essexbrass.com

Military Standard (MS) replacement data. This CID replaces the following Military Standard as shown in table I.

TABLE I. MS supersession data.

CID PIN	Superseded MS
AA559440/4-014	MS35785-1
AA559440/4-015	MS35785-2
AA559440/4-016	MS35785-3
AA559440/4-017	MS35785-4
AA559440/4-018	MS35785-5
AA559440/4-019	MS35785-6
AA559440/4-020	MS35785-7

Part number (P/N) supersession data. These CID P/N's supersede the following MFR's P/Ns as shown in table II. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

TABLE II. P/N supersession data.

CID PIN	MFR's CAGE	MFG's P/N 1/
AA59440/4-014	20969	SC63L
AA59440/4-015	20969	SC64L
AA59440/4-016	20969	SC14
AA59440/4-017	20969	SC15
AA59440/4-018	20969	SC63T
AA59440/4-019	20969	SC64T
AA59440/4-020	20969	SC8

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see the marking paragraph.

National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID. The list in table III is for information only and may not be indicative of all possible NSN's associated with the CID. For up to date information on assigned NSN's please contact the aforementioned DSCC office (see A-A-59440).

TABLE III. NSN's

Dash number (see figure 1) AA59440/4-	NSN
015	4820-00-197-4984
019	4820-00-057-0694

Government users. To acquire information on obtaining these cocks from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-NAB, P.O. BOX 3990, Columbus, OH 43218-3990, or telephone (614) 692-2271 or (614) 692-3191.

Marginal notations. Marginal notations are not used in this revision to identify changes due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - MI
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Army - AT, AV, CR4
Navy - MC

CIVIL AGENCY AND COORDINATING ACTIVITIES:

GSA - FSS

Preparing activity:

DLA - CC

Project 4820-0883-000

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.