INCH-POUND
A-A-59440/7C
24 January 2019
SUPERSEDING
A-A-59440/7B
21 May 2012

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

VALVE, SHUT-OFF, SCREW STEM, THREADED TYPE, 150 PSI, BRASS, WATER, OIL, AND GAS (WOG), NPTF-1 THREADS

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the valve, shut-off, screw stem, threaded type, 150 psi, brass, water, oil, and gas (WOG), NPTF-1 threads described herein shall consist of this document and the issue in effect of A-A-59440.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59440	/07	-	030
CID number	Applicable CID spec sheet (two digits)		Dash number (see figure 1)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Valves, shut-off, screw stem, threaded type, 150 psi, brass, water, oil, and gas (WOG), NPTF-1 threads supplied to this CID specification sheet shall be as specified herein (see figure 1).

Sizes. Nominal sizes of 1/8 inch through 1/4 inch with NPTF-1 threads.

Intended application. This item is for use in liquid and gas systems where pressures do not exceed 150 psig (10.3 bar) at 150°F (65.6°C) and the liquid or gas is compatible with brass.

Permissible variations in dimensions. Figure 1 lists the permissible variations in dimensions for each size. The external dimensions of the valve should not limit procurement unless the end item applications restrict these dimensions.

Optional designs. The illustration is for identification purposes only, it is not intended to restrict designs or shapes not dimensioned.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Threads. Threads are dryseal NPTF-1 in accordance with A-A-59440.

NPTF-1 dryseal threads. NPTF-1 dryseal threads seal pressure tight joints without sealant compound. The engineering principle and design are explained in ASME B1.20.3.

Materials.

Brass. Brass shall be in accordance with the following commercial standards:

ASTM B16/B16M	ASTM B121/B121M	ASTM B505/B505M	SAE AMS4845
ASTM B22	ASTM B124/B124M	ASTM B584	SAE AMS4855
ASTM B30	ASTM B148	ASTM B763	SAE AMS4860
ASTM B36/B36M	ASTM B176	ASTM B770	SAE AMS4862
ASTM B61	ASTM B271/B271M		SAE AMS4890
ASTM B62	ASTM B369		

Handle. Handle may be steel hot rolled or cold rolled in accordance with QQ-S-698 or a commonly accepted industry standard.

Protective coating.


a. Brass: None.
c. Steel:
    (1) ** Cadmium in accordance with SAE-AMS-QQ-P-416, type II, class 2.
    (2) * Zinc in accordance with ASTM B633; type V or VI, Fe/Zn 8.
    (3) ** Zinc-nickel in accordance with SAE-AMS2417, 12% to 16% nickel, type 2, grade B. (315 ¼ inches (8¼m) minimum)
    (4) ** Zinc-Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC.

NOTES:
1. Cadmium shall not be used in potable water or oxygen systems.
2. Brass shall not have any lead contents.
3. Finishes shall not contain hexavalent chromium
4. * - For use in low corrosion environments.
   ** - For use in medium to high corrosion environments.

Test pressures.

a. Shell: 150 psig (10.3 bar).
b. Seat: 50 psig (3.45 bar).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

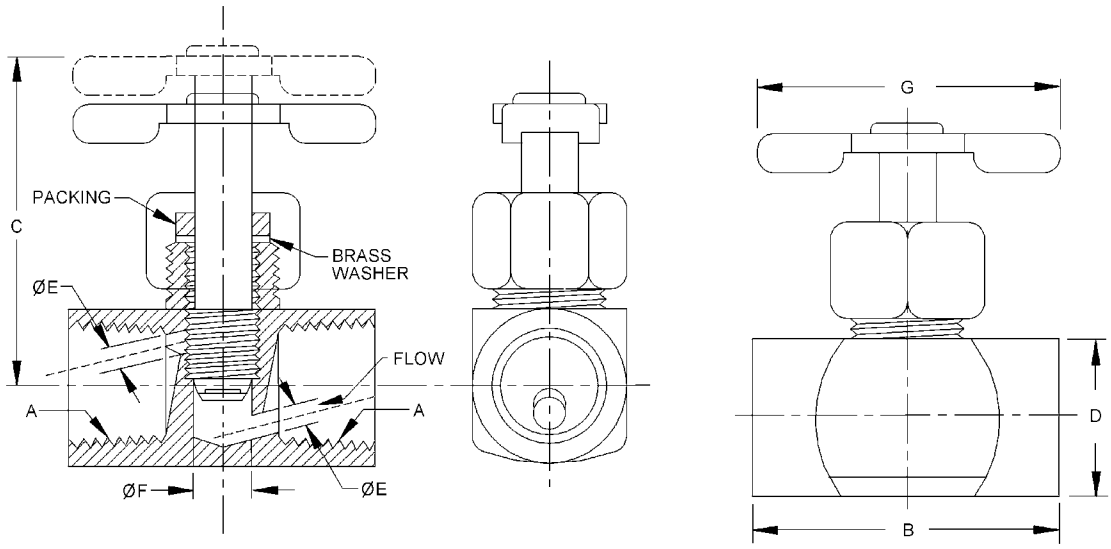

Dash number	Handle plating	A pipe thread NPTF-1	B max (mm)	C max (mm)	D diameter min (mm)	E diameter min (mm)	F diameter max (mm)	G max (mm)
030	Zinc	1/8-27	1.13 (28.7)	1.03 (26.1)	.50 (12.7)	.16 (4.0)	.19 (4.8)	1.39 (35.3)
031	Zinc	1/4-18	1.62 (41.1)	1.27 (32.3)	.69 (17.5)	.16 (4.0)	.19 (4.8)	1.39 (35.3)
032	Cadmium	1/8-27	1.13 (28.7)	1.03 (26.1)	.50 (12.7)	.16 (4.0)	.19 (4.8)	1.39 (35.3)
033	Cadmium	1/4-18	1.62 (41.1)	1.27 (32.3)	.69 (17.5)	.16 (4.0)	.19 (4.8)	1.39 (35.3)
034	Zinc-nickel	1/8-27	1.13 (28.7)	1.03 (26.1)	.50 (12.7)	.16 (4.0)	.19 (4.8)	1.39 (35.3)
035	Zinc-nickel	1/4-18	1.62 (41.1)	1.27 (32.3)	.69 (17.5)	.16 (4.0)	.19 (4.8)	1.39 (35.3)
036	Zinc-aluminum	1/8-27	1.13 (28.7)	1.03 (26.1)	.50 (12.7)	.16 (4.0)	.19 (4.8)	1.39 (35.3)
037	Zinc-aluminum	1/4-18	1.62 (41.1)	1.27 (32.3)	.69 (17.5)	.16 (4.0)	.19 (4.8)	1.39 (35.3)

FIGURE 1. Valve, plug, three way, threaded type.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.010 inch (0.25 mm).
4. Measurement across flats of hexagonal wrench pad may be a standard measurement.
5. Flow of liquid should be toward the valve seat not toward the stem threads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A-A-59440 - Cock-Valves and Valves, General Requirements for

Federal Specification

QQ-S-698 - Steel, Sheet and Strip, Low Carbon

(Copies of these documents are available online at https://quicksearch.dla.mil or https://assist.dla.mil).

Other Publications

ASME INTERNATIONAL

ASME B1.20.3 - DrySeal Pipe Threads

(Copies of these documents are available online at http://www.asme.org or from the ASME International, Three Park Avenue, New York, NY 10016-5990)

ASTM INTERNATIONAL

ASTM B16/B16M - Free-Cutting Brass Rod, Bar and Shapes for use in Screw Machines
ASTM B22 - Bronze Castings for Bridges and Turntables
ASTM B30 - Copper Alloys in Ingot Form
ASTM B36/B36M - Brass Plate, Sheet, Strip, and Rolled Bar
ASTM B61 - Steam or Valve Bronze Castings
ASTM B62 - Composition Bronze or Ounce Metal Castings
ASTM B121/B121M - Leaded Brass Plate, Sheet, Strip, and Rolled Bar
ASTM B124/B124M - Copper and Copper Alloy Forging Rod, Bar, and Shapes
ASTM B148 - Aluminum-Bronze Sand Castings
ASTM B176 - Copper-Alloy Die Castings
ASTM B271/B271M - Copper-Base Alloy Centrifugal Castings
ASTM B369 - Copper-Nickel Alloy Castings
ASTM B505/B505M - Copper Alloy Continuous Castings
ASTM B584 - Copper Alloy Sand Castings for General Applications
ASTM B633 - Electrodeposited Coatings of Zinc on Iron and Steel
ASTM B763 - Copper Alloy Sand Castings for Valve Applications
ASTM B770 - Copper-Beryllium Alloy Sand Castings for General Applications
ASTM F1136/F1136M - Zinc/Aluminum Corrosion Protective Coatings for Fasteners

(Copies of these documents are available online at http://www.astm.org or from the ASTM International, P.O. Box C700, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

SAE INTERNATIONAL

SAE-AMS-QQ-P-416 - Plating, Cadmium (Electrodeposited)
SAE AMS4845 - Tin Bronze Castings, Sand and Centrifugal 87.5CU - 10SN - 2ZN as Cast
SAE AMS4855 - Leaded Red Brass, Sand and Centrifugal Castings 85CU - 5.0SN - 5.0PB - 5.0ZN as Cast

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

SAE AMS4860	-	Manganese Bronze, Sand and Centrifugal Castings 58CU - 39ZN - 1.2FE - 1.0AL - 0.80MN as Cast
SAE AMS4862	-	Manganese Bronze, Sand and Centrifugal Castings 63CU - 24ZN - 6.2AL - 3.8MN - 3.0FE High Strength, as Cast
SAE AMS4890	-	Copper-Beryllium Alloy Castings 97CU - 2.1BE - 0.52CO - 0.28SI Solution Heat Treated (TBOO)
SAE-AMS2417	-	Plating, Zinc-Nickel Alloy

(Copies of these documents are available on line at www.sae.org from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, and Tel: 877-606-7323 [inside USA and Canada] or 724-776-4970 [outside USA], email at CustomerService@sae.org.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
01276	Eaton Aeroquip Inc. 14615 Lone Oak Rd. Eden Prairie, MN 55344 952-294-2032/888-258-0222 jeffenoe@eaton.com
93061	Parker-Hannifin Corp Brass Products Division 300 Parker Drive Otsego, MI 49708-1472 260-636-2104 dwsanders@Parker.com
20969	Essex Brass Corp 23500 Pinewood Warren, MI 48091-3122 586-757-8200 bpushman@essexbrass.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Military standard (MS) supersession data. This CID replaces the following MS as shown in table I.

TABLE I. MS supersession data.

Dash number (see figure 1) AA59440/7	Superseded MS
030 Steel (zinc plated)	MS35934-1
031 Steel (zinc plated)	MS35934-2
032 Steel (Cadmium plated)	MS35934-1
033 Steel (Cadmium plated)	MS35934-2

1/ These parts were originally listed in MS35935 as a single part type. Due to special handling/disposal and corrosion resistance requirements the parts have been separated in this CID.

Part number P/N supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown in table II. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. PIN supersession data.

Dash number (see figure 1) AA59440/7	MFR's CAGE	MFR's P/N 1/
030	01276	6800
031	01276	6805
032		
033		

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see marking paragraph of A-A-59440.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

MILITARY INTERESTS:

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Army - CR4, GL, MI
Navy- AS, SA

CIVIL AGENCY AND COORDINATING ACTIVITIES:

GSA - FSS

Preparing activity:

DLA - CC

(Project 4820-2018-016)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.