[INCH-POUND]
A-A-59440/8A
23 May 2005
SUPERSEDING
A-A-59440/8
13 August 1999

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

COCK, SHUT-OFF, SCREW STEM, THREADED TYPE, 50 P.S.I., BRASS, WATER, OIL, AND GAS (WOG), NPTF-1 THREADS

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

The complete requirements for procuring the cock, shut-off, screw stem, threaded type, 50 psi, brass, water, oil and gas (WOG), NPTF-1 threads described herein shall consist of this document and the issue in effect of CID A-A-59440.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA59440	/8	-	032
CID number	Applicable CID sheet (two digits)		Dash number (see figure 1)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Cock, shut-off, screw stem, threaded type, 50 psi, brass, water, oil and gas (WOG), NPTF-1 threads supplied to this CID shall be as specified herein (see figure 1).

Sizes. Nominal sizes of 1/8 inch through1/2 inch with NPTF-1 threads.

Intended application. This item is for use in liquid and gas systems where pressures do not exceed 50 psig (3.45 bar) water, oil and gas (WOG) at 150°F (65.6°C) and the liquid is compatible with brass.

Permissible variations in dimensions. Figure 1 lists the permissible variations in dimensions for each size. The external dimensions of the cocks should not limit procurement unless the end item applications restrict these dimensions.

Optional designs. The illustration is for identification purposes only is not intended to restrict designs or shapes not dimensioned.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Threads. Threads are dryseal NPTF-1 in accordance with CID A-A-59440.

Materials.

Brass. Brass shall be in accordance with the following commercial standards:

ASTM B16	ASTM B121	ASTM B505	SAE AMS 4842
ASTM B22	ASTM B124	ASTM B584	SAE AMS 4845
ASTM B30	ASTM B148	ASTM B763	SAE AMS 4855
ASTM B36	ASTM B176	ASTM B770	SAE AMS 4860
ASTM B61	ASTM B271		SAE AMS 4862
ASTM B62	ASTM B369		SAE AMS 4890

Spring material. Spring shall be phosphor bronze in accordance with ASTM B134, ASTM B159, or ASTM 206. Spring is phosphor bronze to avoid possible spark and explosion.


Protective coating.

Brass: None

Test pressures.

a. Shell 80 psig (5.5 bar).
b. Seat 10 psig (0.69 bar).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

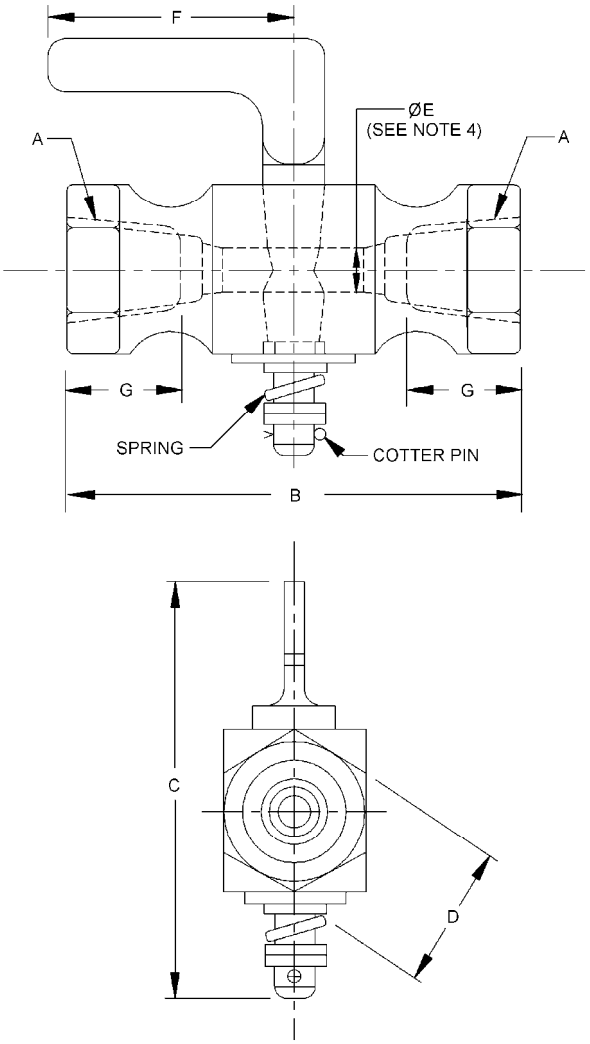

Dash Number	A pipe thread NPTF-1	B Max (mm)	C Max (mm)	D across flats ±.020 (0.51 mm)	E dia Min (mm)	F Max (mm)	G Max (mm)
032	1/8-27	1.75 (44.5	1.94 (49.3)	0.56 or 0.75 (142 or 19.1)	.16 (4.1)	1.38 (35.1)	0.38 (9.7)
033	1/4-18	2.12 (53.8)	2.06 (52.3)	0.75 or 0.88 (19.1 or 22.4)	.19 (4.8)	1.38 (35.1)	0.56 (14.2)
034	3/8-18	2.44 (62.0)	2.44 (62.0)	0.88 or 0.94 (22.4 or 23.9)	.19 (4.8)	1.69 (42.9)	0.56 (14.2)
035	1/2 - 14	3.00 (76.2)	2.56 (65.0)	1.16 or 1.25 (29.5 or 31.8)	0.25 (6.4)	2.12 (54.0)	0.75 (19.1)

FIGURE 1. Cock, plug, three way, threaded type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ± .010 inch (0.25 mm).
4. Oval port having same cross sectional area is acceptable.

FIGURE 1. Cock, plug, three way, threaded type - Continued.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to CID. See classification information for PIN format example.

Source of documents.

COMMERCIAL ITEM DESCRIPTION

A-A-59440	-	Cocks, Drain, Cocks, Plug, and Cocks, Shutoff, Screw Stem; Brass, NPT and NPTF-1 Threads, General Requirements For

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Other Publications

ASTM INTERNATIONAL

ASTM B16	-	Rod, Brass, Free-Cutting, Bar and Shapes for use in Screw Machines
ASTM B22	-	Castings, Bronze, for Bridges and Turntables
ASTM B30	-	Copper Alloys in Ingot Form
ASTM B36	-	Plate, Brass, Sheet, Strip, and Rolled Bar
ASTM B61	-	Castings, Steam or Valve Bronze
ASTM B62	-	Metal Castings, Composition Bronze or Ounce
ASTM B121	-	Plate, Leaded Brass, Sheet, Strip, and Rolled Bar
ASTM B124	-	Copper and Copper Alloy Forging Rod, Bar, and Shapes
ASTM B134	-	Brass Wire
ASTM B148	-	Aluminum-Bronze Sand Castings
ASTM B159	-	Wire, Phosphor Bronze, Standard Specification for
ASTM B176	-	Die Castings, Copper-Alloy
ASTM B206	-	Copper-Nickel-Zinc (Nickel Silver) Wire and Copper-Nickel Alloy Wire
ASTM B271	-	Copper-Base Alloy Centrifugal Castings
ASTM B369	-	Copper-Nickel Alloy Castings
ASTM B427	-	Castings, Gear Bronze Alloy
ASTM B505	-	Castings, Copper Alloy, Continuous
ASTM B584	-	Castings, Copper Alloy Sand, for General Applications
ASTM B763	-	Copper Alloy Sand Castings for Valve Application
ASTM B770	-	Copper-Beryllium Alloy Sand Castings for General Applications
ASTM B806	-	Copper Alloy Permanent Mold Castings for General Applications

(Copies of these documents are available from http://www.astm.org or ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, Pennsylvania, USA 19428-2959.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

SAE INTERNATIONAL

SAE AMS4842	-	Castings, Leaded Bronze, Sand and Centrifugal 80CU - 10SN - 9.5PB as Cast
SAE AMS4845	-	Tin Bronze Castings, Sand and Centrifugal 87.5CU - 10SN - 2ZN as Cast
SAE AMS4855	-	Leaded Red Brass, Sand and Centrifugal Castings 85CU - 5.0SN - 5.0PB - 5.0ZN as Cast
SAE AMS4860	-	Manganese Bronze, Sand and Centrifugal Castings 58CU - 39ZN - 1.2FE - 1.0AL - 0.80MN as Cast
SAE AMS4862	-	Manganese Bronze, Sand and Centrifugal Castings 63CU - 24ZN - 6.2AL - 3.8MN - 3.0FE High Strength, as Cast
SAE AMS4890	-	Copper-Beryllium Alloy Castings 97CU - 2.1BE - 0.52CO - 0.28SI Solution Heat Treated (TBOO)

(Copies of these documents are available from http://www.sae.org/ or SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFG's CAGE	MFG's name and address
79470	Eaton Corp 14615 Loneoak Rd. Edenperry, MN 55344 952-294-2032/888-258-0222 jeffenoe@eaton.com
93061	Parker-Hannifin Corp Brass Products Division 300 Parker Drive Otsego, MI 49708-1472 260-636-2104 dwsanders@Parker.com
20969	Essex Brass Corp 23500 Pinewood Warren, MI 48091-3122 586-757-8200 bpushman@essexbrass.com

Military Standard (MS) replacement data. This CID replaces the following Military Standard as shown in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

TABLE I. MS supersession data.

CID PIN	Superseded MS
AA559440/8-032	MS35930-1
AA559440/8-033	MS35930-2
AA559440/8-034	MS35930-3
AA559440/8-035	MS35930-4

Part number (P/N) supersession data. These CID P/N's supersede the following MFR's P/Ns as shown in table II. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

CID PIN	MFR's CAGE	MFR's PIN 1/
AA59440/8-032	20969	AC58
AA59440/8-033	20969 70411	AC59 132CL
AA59440/8-034	20969 37239	AC60 1037-3-8
AA59440/8-035	20969	AC60A

1/ The manufacturer's PIN shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see marking paragraph.

Marginal notations. Marginal notations are not used in this revision to identify changes due to the extent of the changes.

MILITARY INTERESTS:

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Army - AT, CR4, GL, MI
Navy - MC,

CIVIL AGENCY AND COORDINATING ACTIVITIES:

GSA - FSS

Preparing activity:

DLA - CC

Project 4820-0886-000

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.