[INCH-POUND]
A-A-59440/9A
23 May 2005
SUPERSEDING
A-A-59440/9
13 August 1999

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

# COCK, PLUG, GROUND KEY, THREADED TYPE, BRASS, 125 P.S.I. STEAM, NPTF-1 THREADS

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

The complete requirements for procuring the cock, plug, ground key, threaded type, brass, 125 psi steam, NPTF-1 threads described herein shall consist of this document and the issue in effect of CID A-A-59440.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

| AA59440 | /9 | - | 032 |
|---|---|---|---|
| CID number | Applicable CID sheet (two digits) | | Dash number (see figure 1) |

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Cock, plug, ground key, threaded type, brass, 125 psi steam, NPTF-1 threads supplied to this CID shall be as specified herein (see figure 1).

Size. Nominal sizes of 1/8 inch through3/8 inch with NPTF-1 threads.

Intended application. This item is for use in steam systems where pressures do not exceed 125 psig (8.62 bar) steam at 351°F (177°C) and the liquid is compatible with brass.

Permissible variations in dimensions. Figure 1 lists the permissible variations in dimensions for each size. The external dimensions of the cocks should not limit procurement unless the end item applications restrict these dimensions.

Optional designs. The illustration is for identification purposes only is not intended to restrict designs or shapes not dimensioned.

Threads. Threads are dryseal NPTF-1 in accordance with CID A-A-59440.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Materials.

Brass. Brass shall be in accordance with the following commercial standards:

| | | | |
|---|---|---|---|
| ASTM B16 | ASTM B121 | ASTM B505 | SAE AMS 4842 |
| ASTM B22 | ASTM B124 | ASTM B584 | SAE AMS 4845 |
| ASTM B30 | ASTM B148 | ASTM B763 | SAE AMS 4855 |
| ASTM B36 | ASTM B176 | ASTM B770 | SAE AMS 4860 |
| ASTM B61 | ASTM B271 | | SAE AMS 4862 |
| ASTM B62 | ASTM B369 | | SAE AMS 4890 |

Preferred valve material. Preferred material is brass in accordance with ASTM B61.

Protective Coating.


Brass: None

Test Pressures.

a. Shell 250 psig (17.2 bar).
b. Seat 125 psig (8.62 bar).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

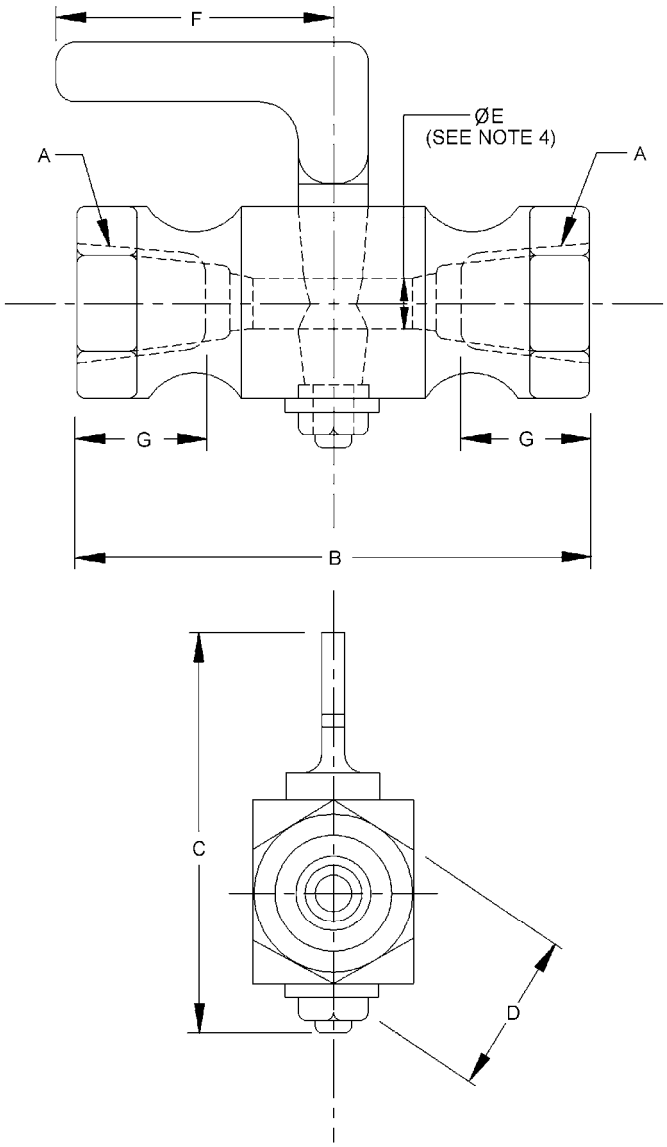


| Dash Number | A Pipe thread NPTF-1 | B Max (mm) | C max (mm) | D (see note 5) across flats ±.020 (0.51 mm) | E dia min (mm) | F max (mm) | G max (mm) |
|---|---|---|---|---|---|---|---|
| 036 | 1/8-27 | 1.75 (44.5) | 1.94 (49.3) | .56 or .75 (14.2 or 19.1) | .16 (4.1) | 1.38 (35.1) | 0.38 (9.7) |
| 037 | 1/4-18 | 2.12 (53.8) | 2.20 (55.9) | .75 or .88 (19.1 or 22.4) | .16 (.41) | 1.38 (35.1) | 0.56 (14.2) |
| 038 | 3/8-18 | 2.44 (62.0) | 2.44 (62.0) | .88 or .94 (22.4 or 23.9) | .18 (4.6) | 1.75 (44.5) | 0.56 (14.2) |

FIGURE 1. Cock, plug, ground, threaded type.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ± .010 inch (0.25 mm).
4. Oval port having same cross sectional area is acceptable.
5. Measurements across flats of hexagonal wrench pad shall be a standard measurement under 1 inch (2.54 mm).

FIGURE 1. Cock, plug, ground, threaded type - Continued.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Source of documents

| Commercial Item Description | | |
|---|---|---|
| A-A-59440 | - | Cocks, Drain, Cocks, Plug, and Cocks, Shutoff, Screw Stem; Brass, NPT and NPTF-1 Threads, General Requirements For |

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Other Publications

ASTM INTERNATIONAL

| | | |
|---|---|---|
| ASTM B16 | - | Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines |
| ASTM B22 | - | Standard Specification for Bronze Castings for Bridges and Turntables |
| ASTM B30 | - | Standard Specification for Copper Alloys in Ingot Form |
| ASTM B36 | - | Standard Specification for Brass Plate, Sheet, Strip, and Rolled Bar |
| ASTM B61 | - | Standard Specification for Steam or Valve Bronze Castings |
| ASTM B62 | - | Standard Specification for Composition Bronze or Ounce Metal Castings |
| ASTM B121 | - | Standard Specification for Leaded Brass Plate, Sheet, Strip, and Rolled Bar |
| ASTM B124 | - | Standard Specification for Copper and Copper Alloy Forging Rod, Bar, and Shapes |
| ASTM B148 | - | Standard Specification for Aluminum-Bronze Sand Castings |
| ASTM B176 | - | Standard Specification for Copper-Alloy Die Castings |
| ASTM B271 | - | Standard Specification for Copper-Base Alloy Centrifugal Castings |
| ASTM B369 | - | Standard Specification for Copper-Nickel Alloy Castings |
| ASTM B427 | - | Standard Specification for Gear Bronze Alloy Castings |
| ASTM B505 | - | Standard Specification for Copper-Base Alloy Continuous Castings |
| ASTM B584 | - | Standard Specification for Copper Alloy Sand Castings for General Applications |
| ASTM B763 | - | Standard Specification for Copper Alloy Sand Castings for Valve Application |
| ASTM B770 | - | Standard Specification for Copper-Beryllium Alloy Sand Castings for General Applications |
| ASTM B806 | - | Standard Specification for Copper Alloy Permanent Mold Castings for General Applications |

(Copies of these documents are available from http://www.astm.org or ASTM International, P.O. Box C700, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959).

SAE INTERNATIONAL

| | | |
|---|---|---|
| SAE AMS 4842 | - | Castings, Leaded Bronze, Sand and Centrifugal 80Cu - 10Sn - 9.5Pb a as Cast (UNS C93700) |
| SAE AMS 4845 | - | Tin Bronze Castings Sand and Centrifugal 87.5Cu - 10Sn - 2Zn as Cast |
| SAE AMS 4855 | - | Leaded Red Brass, Sand and Centrifugal Castings 85Cu - 5.0Sn - 5.0Pb - 5.0Zn as Cast UNS C83600 |
| SAE AMS 4860 | - | Manganese Bronze, Sand and Centrifugal Castings 58Cu - 39Zn - 1.2 - 1.0Al –0.80 Mn as Cast UNS C86500 |
| SAE AMS 4862 | - | Manganese Bronze, Sand and Centrifugal Castings 63Cu - 24Zn – 6.2Al - 3.8Mn - 3.0Fe High Strength, as Cast-UNS C86300 |
| SAE AMS 4890 | - | Copper-Beryllium Alloy Castings 97Cu - 2.1Be - 0.52Co - 0.28Si Solution Heat Treated (TB00) (UNS C82500 |

(Copies of these documents are available from http://www.sae.org/ or SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| MFR's CAGE | MFR's name and address |
|---|---|
| 79470 | Eaton Corp<br>14615 Loneoak Rd.<br>Edenperry, MN 55344<br>952-294-2032/888-258-0222<br>jeffenoe@eaton.com |
| 93061 | Parker-Hannifin Corp<br>Brass Products Division<br>300 Parker Drive<br>Otsego, MI 49708-1472<br>260-636-2104<br>dwsanders@Parker.com |
| 20969 | Essex Brass Corp<br>23500 Pinewood<br>Warren, MI 48091-3122<br>586-757-8200<br>bpushman@essexbrass.com |

Military Standard (MS) replacement data. This CID replaces the following Military Standard as shown in table I.

TABLE I. MS supersession data.

| CID PIN | Superseded MS |
|---|---|
| AA559440/9-036 | MS35931-1 |
| AA559440/9-037 | MS35931-2 |
| AA559440/9-038 | MS35931-3 |

Part number (P/N) supersession data. These CID P/Ns supersede the following MFR's P/Ns as shown in table II. This information is being provided to assist in reducing proliferation in the Government inventory system.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

TABLE II. P/N supersession data.

| CID PIN | MFR's CAGE | MFG's P/N 1/ |
|---|---|---|
| AA59440/9-036 | 20969 | SC58 |
| AA59440/9-037 | 20969 | SC59 |
| AA59440/9-038 | 20969 | SC60 |

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see the marking paragraph.

Marginal notations. Marginal notations are not used in this revision to identify changes due to the extent of the changes.

MILITARY INTERESTS:

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Army - AT, CR4, GL, MI
Navy - MC

CIVIL AGENCY AND COORDINATING ACTIVITIES:

GSA - FSS

Preparing activity:

DLA - CC

(Project 4820-0887-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.