MILITARY SPECIFICATION

MICROCIRCUITS, DARLINGTON TRANSISTOR ARRAY, SEVEN AND EIGHT GATE, MONOLITHIC SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for silicon, monolithic, seven and eight gate, Darlington transistor array microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete part number.

1.2 Part number. The complete number shall be in accordance with MIL-M-38510.

1.2.1 Device types. The device types shall be as follows:

Device types	Circuit
01,02,03,04,05	Darlington transistor array, seven gate
06,07,08,09,10	Darlington transistor array, eight gate

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outlines. The case outlines shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
E	D-2 (16-lead, 1/4" x 7/8"), dual-in-line-package
V	D-6 (18-lead, 1/4" x 15/16"), dual-in-line-package

1.3 Absolute maximum ratings.

Output voltage, (V_{CE})	50 V dc
Input voltage, (V_{IN})	
Device types 02, 03, 04, 07, 08, 09	30 V dc
Device types 05, 10	15 V dc
Peak collector current (I_C)	500 mA
Peak input current (I_{IN})	25 mA
Power dissipation (P_D) 1/	1.0 W
Storage temperature range	-65°C to +150°C
Junction temperature (T_J)	+175°C

1.4 Recommended operating conditions. Recommended operating conditions shall be in accordance with the electrical performance characteristics specified in table I.

Ambient operating temperature (T_A)	-55°C to +125°C

1/ Absolute maximum rating for power dissipation is for one Darlington pair only.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026/0 21T13:55Z
Check the source to verify that this is the current version before use.

1.5 Power and thermal characteristics.

Package	Case outline	Max. allowable power dissipation	Max. θ_{JC}	Max. θ_{JA}
16-lead, dual-in-line package	E	277 mV at T_A = +125°C	20°C/W	90°C/W
18-lead, dual-in-line package	V	330 mV at T_A = +125°C	20°C/W	75°C/W

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification and standard. The following specification and standard form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Circuit diagram and terminal connections. The circuit diagram and terminal connections shall be as specified on figure 1.

3.2.2 Truth table and logic equations. The truth table and logic equations shall be as specified on figure 2.

3.2.3 Functional schematic circuit. The functional schematic circuit shall be as specified on figure 3.

3.2.4 Schematic circuits. The schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in this specification and shall be submitted to the qualifying activity as a prerequisite for qualification. All qualified manufacturers' schematics shall be maintained and available upon request.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics for devices types 01 and 06.

Test	Symbol	Conditions $-55^{\circ}C < T_A < +125^{\circ}C$ unless otherwise specified		Limits		Unit
				Min	Max	
Output leakage current	I_{CEX}	V_{CE} = 50 V			10.0	µA
Collector-emitter saturation voltage	$V_{CE(sat)}$	$T_A = -55^{\circ}C$	I_C = 350 mA, I_B = 850 µA		1.8	V
			I_C = 200 mA, I_B = 550 µA		1.5	V
			I_C = 100 mA, I_B = 350 µA		1.3	V
		$T_A = +25^{\circ}C$	I_C = 350 mA, I_B = 500 µA		1.6	V
			I_C = 200 mA, I_B = 350 µA		1.3	V
			I_C = 100 mA, I_B = 250 µA		1.1	V
		$T_A = +125^{\circ}C$	I_C = 350 mA, I_B = 500 µA		1.8	V
			I_C = 200 mA, I_B = 350 µA		1.5	V
			I_C = 100 mA, I_B = 250 µA		1.3	V
Input current	$I_{IN(off)}$	$I_B \leq 25$ µA			500	µA
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, $T_A = -55^{\circ}C$		500		
		V_{CE} = 2 V, I_C = 350 mA, $+25^{\circ}C \leq T_A \leq +125^{\circ}C$		1000		
Clamp diode leakage current	I_R	V_R = 50 V			10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA			2.0	V
Turn-on delay	t_{PLH}	$T_A = +25^{\circ}C$	See figure 8		750	ns
Turn-off delay	t_{PHL}	$T_A = +25^{\circ}C$	See figure 8		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics for devices types 02 and 07.

Test	Symbol	Conditions $-55°C \le T_A \le +125°C$ unless otherwise specified		Limits Min	Limits Max	Unit
Output leakage current	I_{CEX}	V_{CE} = 50 V	V_{IN} = 6 V		10.0	µA
Collector-emitter saturation voltage	$V_{CE(sat)}$	T_A = -55°C	I_C = 350 mA, I_B = 850 µA		1.8	V
			I_C = 200 mA, I_B = 550 µA		1.5	V
			I_C = 100 mA, I_B = 350 µA		1.3	V
		T_A = +25°C	I_C = 350 mA, I_B = 500 µA		1.6	V
			I_C = 200 mA, I_B = 350 µA		1.3	V
			I_C = 100 mA, I_B = 250 µA		1.1	V
		T_A = +125°C	I_C = 350 mA, I_B = 500 µA		1.8	V
			I_C = 200 mA, I_B = 350 µA		1.5	V
			I_C = 100 mA, I_B = 250 µA		1.3	V
Input current	$I_{IN(on)}$	V_{IN} = 17 V		575	1300	µA
Input current	$I_{IN(off)}$	$I_B \le 25$ µA			500	µA
Input voltage	$V_{IN(on)}$	T_A = -55°C	$V_{CE} \le 2$ V, I_C = 300 mA	18		V
		+25°C $\le T_A \le$ +125°C	$V_{CE} \le 2$ V, I_C = 300 mA	13		V
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, T_A = -55°C		500		
		V_{CE} = 2 V, I_C = 350 mA, +25°C $\le T_A \le$ +125°C		1000		
Clamp diode leakage current.	I_R	V_R = 50 V			10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA			2.0	V
Turn-on delay	t_{PLH}	T_A = +25°C	See figure 8		750	ns
Turn-off delay	t_{PHL}	T_A = +25°C	See figure 8		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Collector-emitter saturation voltage	$V_{CE(sat)}$	T_A = -55°C	I_C = 350 mA, I_B = 650 µA		1.8	V
			I_C = 200 mA, I_B = 550 µA		1.5	V
			I_C = 100 mA, I_B = 350 µA		1.3	V
		T_A = +25°C	I_C = 350 mA, I_B = 500 µA		1.6	V
			I_C = 200 mA, I_B = 350 µA		1.3	V
			I_C = 100 mA, I_B = 250 µA		1.1	V
		T_A = +125°C	I_C = 350 mA, I_B = 500 µA		1.8	V
			I_C = 200 mA, I_B = 350 µA		1.5	V
			I_C = 100 mA, I_B = 250 µA		1.3	V
Input current	$I_{IN(on)}$	V_{IN} = 3.85 V		650	1350	µA
Input current	$I_{IN(off)}$	$I_B \leq$ 25 µA			500	µA
Input voltage	$V_{IN(on)}$	T_A = -55°C	$V_{CE} \leq$ 2 V, I_C = 200 mA	2.6		V
			$V_{CE} \leq$ 2 V, I_C = 250 mA	2.8		V
			$V_{CE} \leq$ 2 V, I_C = 300 mA	3.0		V
		+25°C $\leq T_A \leq$ +125°C	$V_{CE} \leq$ 2 V, I_C = 200 mA	2.0		V
			$V_{CE} \leq$ 2 V, I_C = 250 mA	2.2		V
			$V_{CE} \leq$ 2 V, I_C = 300 mA	2.4		V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics for devices types 03 and 08 - Continued.

Test	Symbol	Conditions $-55^{\circ}C \leq T_A \leq +125^{\circ}C$ unless otherwise specified	Limits		Unit
			Min	Max	
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, T_A = -55°C	500		
		V_{CE} = 2 V, I_C = 350 mA, $+25^{\circ}C \leq T_A \leq +125^{\circ}C$	1000		
Clamp diode leakage current	I_R	V_R = 50 V		10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA		2.0	V
Turn-on delay	t_{PLH}	T_A = +25°C See figure 8		750	ns
Turn-off delay	t_{PHL}	T_A = +25°C See figure 8		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics for devices types 04 and 09.

Test	Symbol	Conditions $-55^{\circ}C < T_A < +125^{\circ}C$ unless otherwise specified		Limits Min	Limits Max	Unit
Output leakage current	I_{CEX}	V_{CE} = 50 V			10.0	µA
Collector-emitter saturation voltage	$V_{CE(sat)}$	$T_A = -55^{\circ}C$	I_C = 350 mA, I_B = 850 µA		1.8	V
			I_C = 200 mA, I_B = 550 µA		1.5	V
			I_C = 100 mA, I_B = 350 µA		1.3	V
		$T_A = +25^{\circ}C$	I_C = 350 mA, I_B = 500 µA		1.6	V
			I_C = 200 mA, I_B = 350 µA		1.3	V
			I_C = 100 mA, I_B = 250 µA		1.1	V
		$T_A = +125^{\circ}C$	I_C = 350 mA, I_B = 500 µA		1.8	V
			I_C = 200 mA, I_B = 350 µA		1.5	V
			I_C = 100 mA, I_B = 250 µA		1.3	V
Input current	$I_{IN(on)}$	V_{IN} = 5 V		250	500	µA
		V_{IN} = 12 V		750	1450	µA
Input current	$I_{IN(off)}$	$I_B \leq 25$ µA			500	µA
Input voltage	$V_{IN(on)}$	$T_A = -55^{\circ}C$	$V_{CE} \leq 2$ V, I_C = 125 mA	6.0		V
			$V_{CE} \leq 2$ V, I_C = 200 mA	8.0		V
			$V_{CE} \leq 2$ V, I_C = 275 mA	10.0		V
			$V_{CE} \leq 2$ V, I_C = 350 mA	12.0		V
		$+25^{\circ}C \leq T_A \leq +125^{\circ}C$	$V_{CE} \leq 2$ V, I_C = 125 mA	5.0		V
			$V_{CE} \leq 2$ V, I_C = 200 mA	6.0		V
			$V_{CE} \leq 2$ V, I_C = 275 mA	7.0		V
			$V_{CE} \leq 2$ V, I_C = 350 mA	8.0		V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics for devices types 04 and 09 - Continued.

Test	Symbol	Conditions $-55°C \leq T_A \leq +125°C$ unless otherwise specified	Limits		Unit
			Min	Max	
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, T_A = -55°C	500		
		V_{CE} = 2 V, I_C = 350 mA, $+25°C \leq T_A \leq +125°C$	1000		
Clamp diode leakage current	I_R	V_R = 50 V		10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA		2.0	V
Turn-on delay	t_{PLH}	T_A = +25°C See figure 8		750	ns
Turn-off delay	t_{PHL}	T_A = +25°C See figure 8		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics for devices types 05 and 10.

Test	Symbol	Conditions $-55^{\circ}C \leq T_A \leq +125^{\circ}C$ unless otherwise specified		Limits Min	Limits Max	Unit
Output leakage current	I_{CEX}	V_{CE} = 50 V			10.0	µA
Collector-emitter saturation voltage	$V_{CE(sat)}$	$T_A = -55^{\circ}C$	I_C = 350 mA, I_B = 850 µA		1.8	V
			I_C = 200 mA, I_B = 550 µA		1.5	V
			I_C = 100 mA, I_B = 350 µA		1.3	V
		$T_A = +25^{\circ}C$	I_C = 350 mA, I_B = 500 µA		1.6	V
			I_C = 200 mA, I_B = 350 µA		1.3	V
			I_C = 100 mA, I_B = 250 µA		1.1	V
		$T_A = +125^{\circ}C$	I_C = 350 mA, I_B = 500 µA		1.8	V
			I_C = 200 mA, I_B = 350 µA		1.5	V
			I_C = 100 mA, I_B = 250 µA		1.3	V
Input current	$I_{IN(on)}$	V_{IN} = 3 V		1180	2400	µA
Input current	$I_{IN(off)}$	$I_B \leq 25$ µA			500	µA
Input voltage	$V_{IN(on)}$	$T_A = -55^{\circ}C$	$V_{CE} \leq 2$ V, I_C = 350 mA	3.0		V
		$+25^{\circ}C \leq T_A \leq +125^{\circ}C$	$V_{CE} \leq 2$ V, I_C = 350 mA	2.4		V
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, $T_A = -55^{\circ}C$		500		
		V_{CE} = 2 V, I_C = 350 mA, $+25^{\circ}C \leq T_A \leq +125^{\circ}C$		1000		
Clamp diode leakage current	I_R	V_R = 50 V			10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA			2.0	V
Turn-on delay	t_{PLH}	$T_A = +25^{\circ}C$	See figure 8		750	ns
Turn-off delay	t_{PHL}	$T_A = +25^{\circ}C$	See figure 8		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

3.2.5 Case outline. The case outline shall be as specified in 1.2.3.

3.2.6 Package and sealing material. Package and sealing material shall be in accordance with MIL-M-38510.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 and 6.5 herein.

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended ambient operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510.

3.6.1 Serialization. All class S devices shall be serialized in accordance with MIL-M-38510.

3.6.2 Correctness of indexing and markings. All devices shall be subjected to the final electrical tests specified in table II after part marking to verify that they are correctly indexed and identified by part number. Optionally, an approved electrical test may be devised especially for this requirement.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 53 (see MIL-M-38510, appendix E).

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters (method 5004)	1	1
Final electrical test parameters (method 5004) 1/	1,2,3,9	1,2,3,9
Group A test requirements (method 5005)	1,2,3,9	1,2,3,9
Group C end-point and group B, class S, electrical parameters (method 5005)	1,2,3 and table IV delta limits	1 and table IV delta limits
Group D end-point electrical parameters (method 5005)	1,2,3	1,2,3

1/ PDA applies to subgroup 1 (see 4.2d).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in (method 1015 of MIL-STD-883).

(1) Class S devices: Test condition B using the circuit shown on figure 4.

(2) Class B devices: Test condition B using the circuit shown on figure 4, or test condition A using circuit shown on figure 5, or test condition F using circuit shown on figure 6.

b. Reverse bias burn-in (method 1015 of MIL-STD-883). This screen test shall apply to class S devices only using the circuit shown on figure 5.

c. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

d. The percent defective allowable (PDA) for class S and class B devices shall be as specified in MIL-M-38510, based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883 and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be in included in the PDA. The verified failures of group A, subgroup 1 after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determined the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510 and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Electrical test requirements shall be as specified in table II herein.

b. Subgroups 4, 5, 6, 7, 8, 10, and 11 in table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test for class S devices shall be in accordance with table IIa of method 5005 of MIL-STD-883, using the circuit shown on figure 5. If the alternate burn-in conditions are used, the circuit shown on figure 4 shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 01, 02, 03, 04 and 05

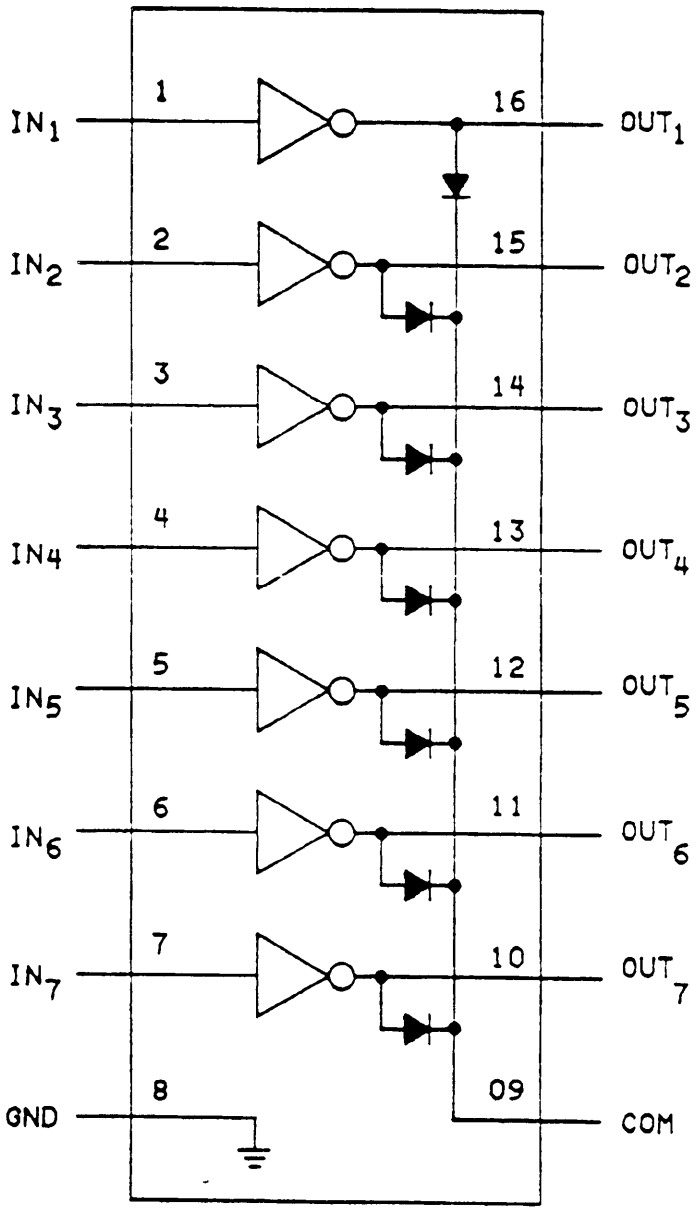


FIGURE 1. Schematic diagram and terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 06, 07, 08, 09 and 10

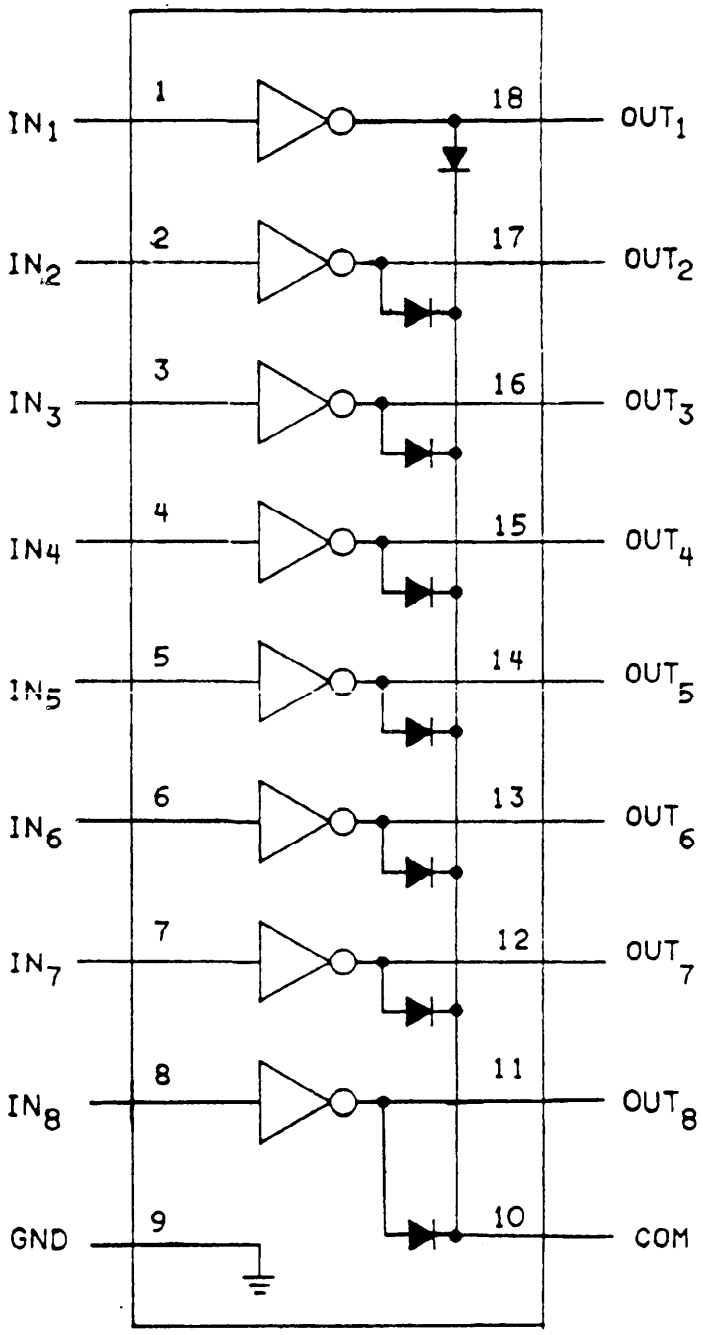


FIGURE 1. Schematic diagram and terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

All device types


Input A	Output Y
0	1
1	0

0 = Logic low level
1 = Logic high level
Y = $\overline{A}$


FIGURE 2. Truth table and logic equation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 01 and 06

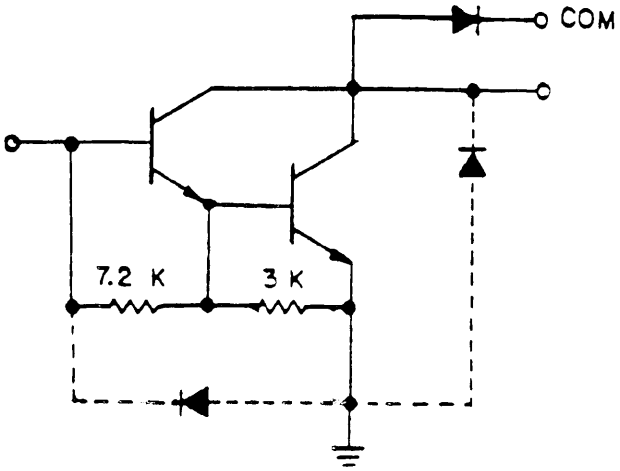

Device types 02 and 07

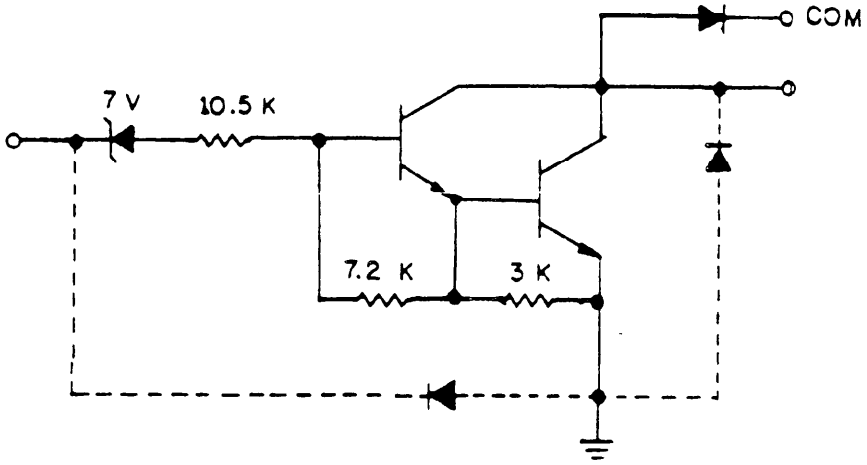

Device types 03 and 08


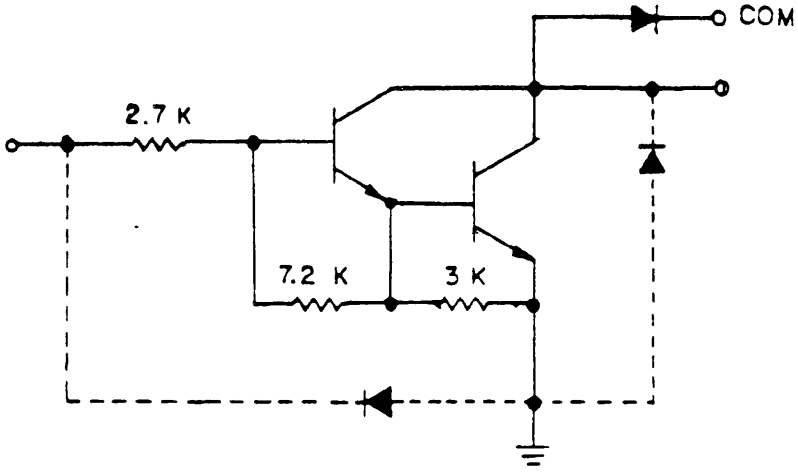



FIGURE 3. Functional schematic circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 04 and 09

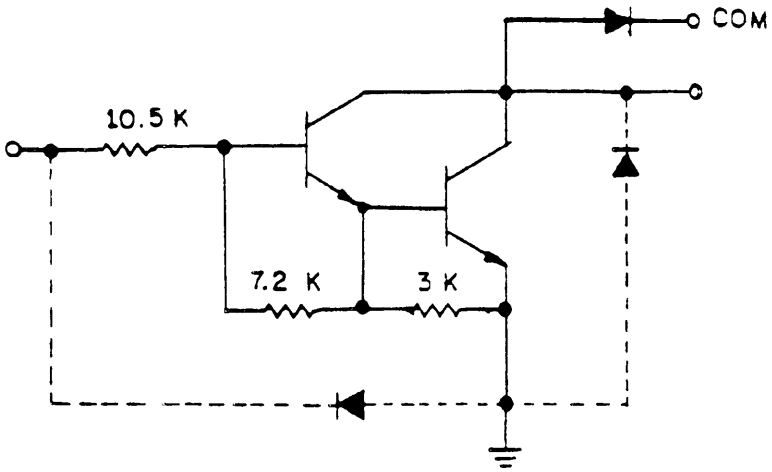

Device types 05 and 10

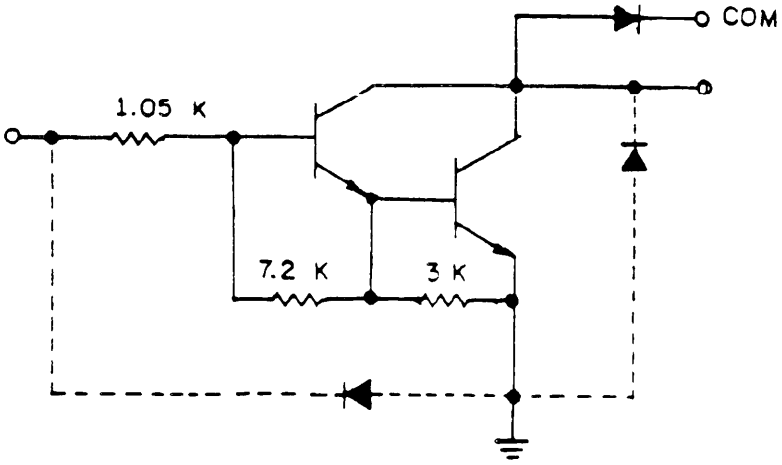


NOTE: Unless otherwise specified all resistance values are in ohms.

FIGURE 3. Functional schematic circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 01, 02, 03, 04 and 05

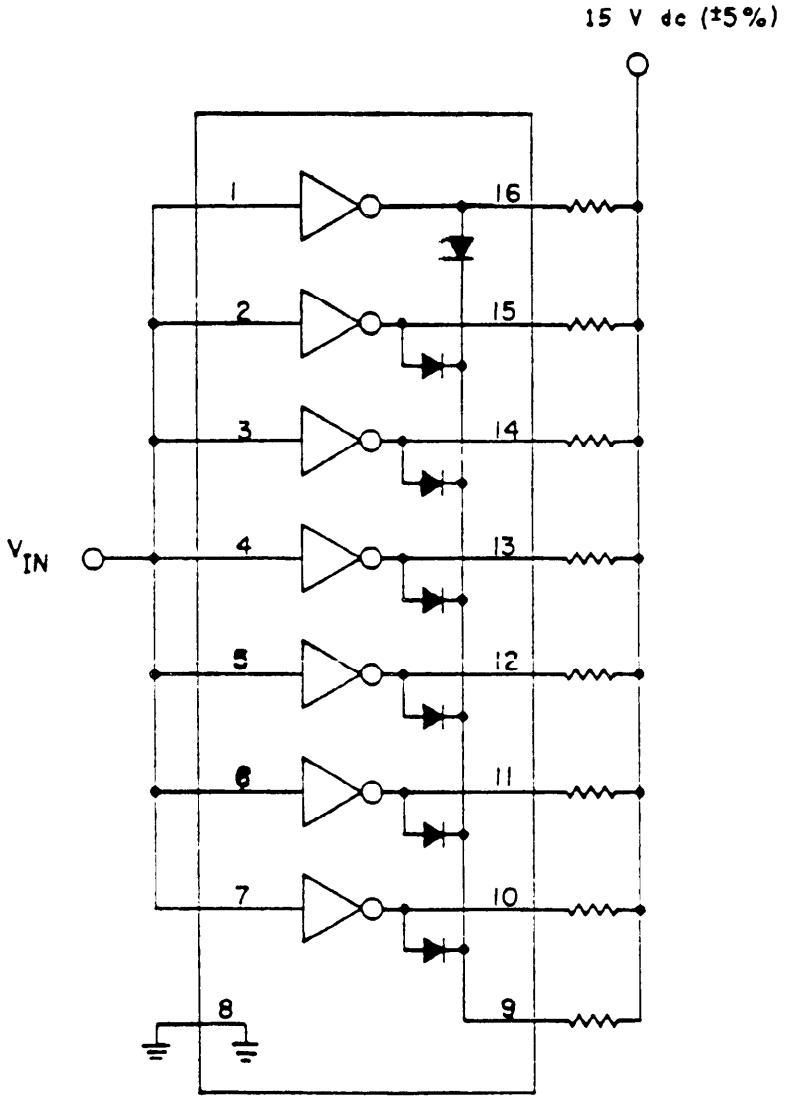


NOTES:
1. Unless otherwise specified T_A = +125°C.
2. All resistance values are 500Ω, ±5 percent.
3. V_{IN} = 5 V for device 01 with an external 112 ohm resistor, ±5%.
4. V_{IN} = 13 V for device 02.
5. V_{IN} = 5 V for device 03.
6. V_{IN} = 6 V for device 04.
7. V_{IN} = 3.5 V for device 05.

FIGURE 4. Burn-in and steady state life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 06, 07, 08, 09 and 10

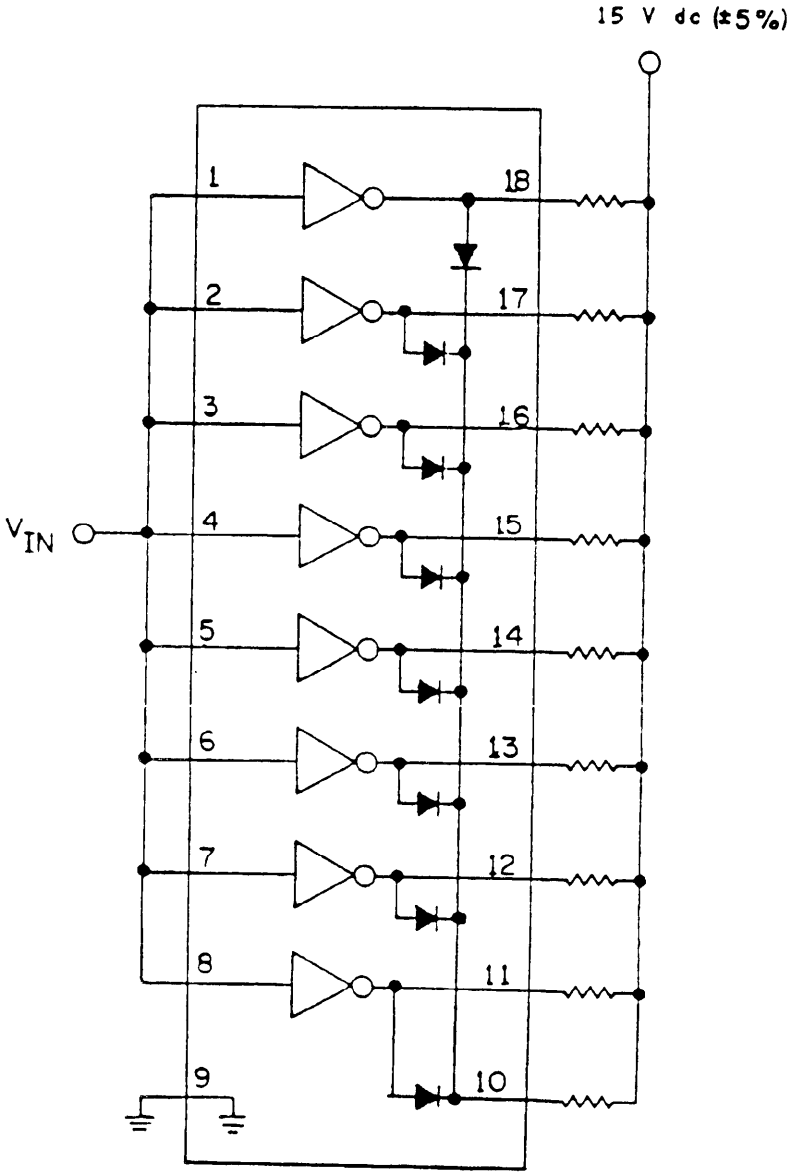


NOTES:
1. Unless otherwise specified T_A = +125°C.
2. All resistance values are 500Ω, ±5 percent.
3. V_{IN} = 5 V for device 06 with an external 112 ohm resistor, ±5%.
4. V_{IN} = 13 V for device 07.
5. V_{IN} = 5 V for device 08.
6. V_{IN} = 6 V for device 09.
7. V_{IN} = 3.5 V for device 10.

FIGURE 4. Burn-in and steady state life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 01, 02, 03, 04, and 05

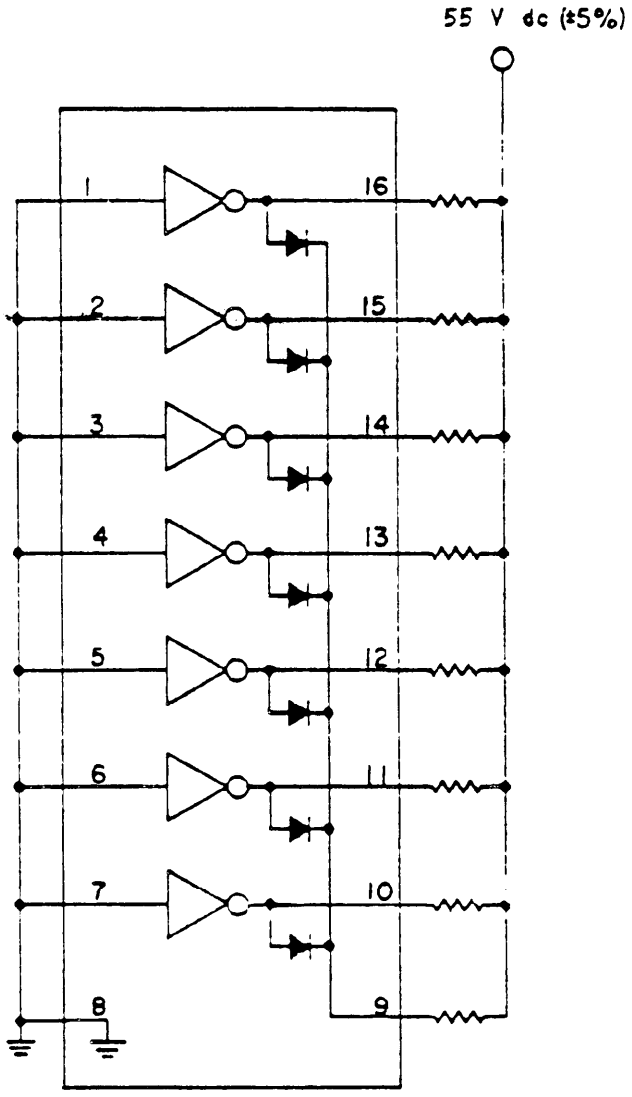


NOTES:
1. Unless otherwise specified T_A = +125°C.
2. All resistance values are 10 kΩ, ±5 percent.
3. Input resistors are optional.

FIGURE 5. Reverse bias burn-in and life test circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 06, 07, 08, 09 and 10

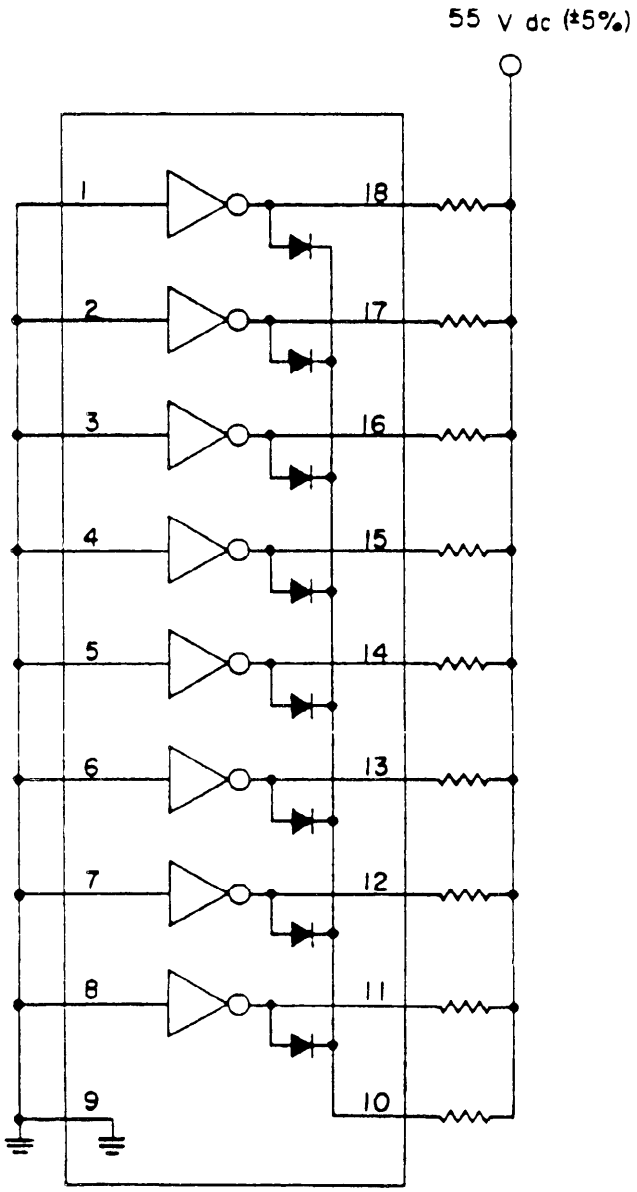


NOTES:
1. Unless otherwise specified T_A = +125°C.
2. All resistance values are 10 kΩ, ±5 percent.
3. Input resistors are optional.

FIGURE 5. Reverse bias burn-in and life test circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 01, 02, 03, 04 and 05

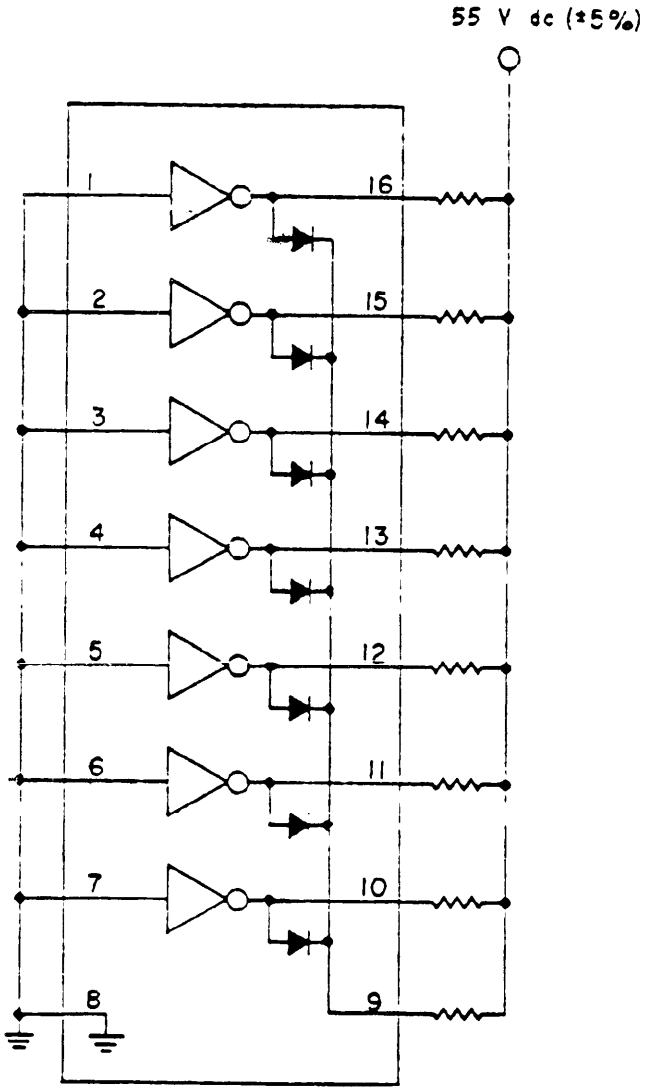


NOTES:
1. Unless otherwise specified all resistance values are 10 kΩ.
2. Input resistors are optional.

FIGURE 6. Accelerated burn-in and steady state life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.


Device types 06, 07, 08, 09 and 10

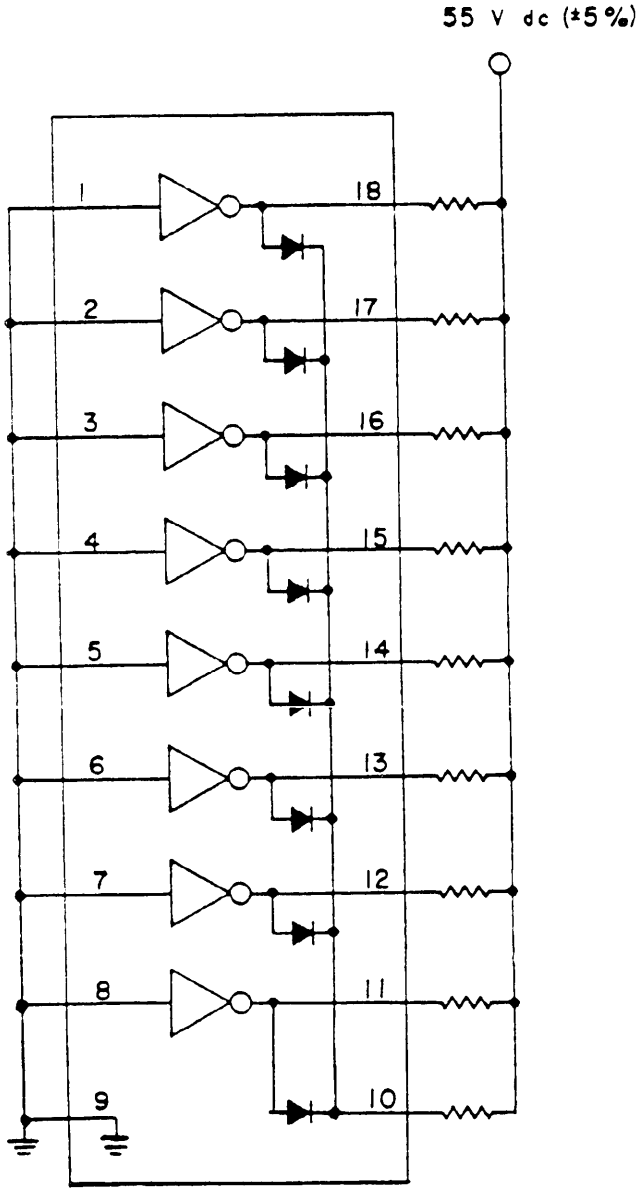


NOTES:
1. Unless otherwise specified all resistance values are 10 kΩ.
2. Input resistors are optional.


FIGURE 6. Accelerated burn-in and steady state life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

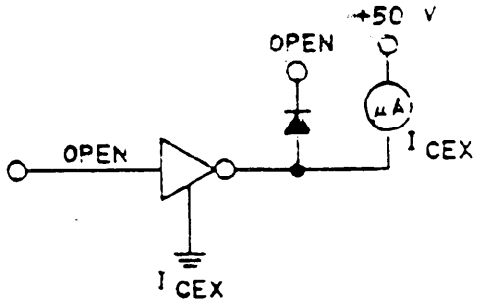



(For device types 02, 03, 04, 05, 07, 09, and 10 only.)

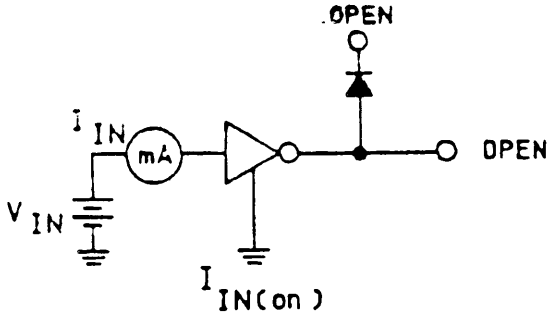


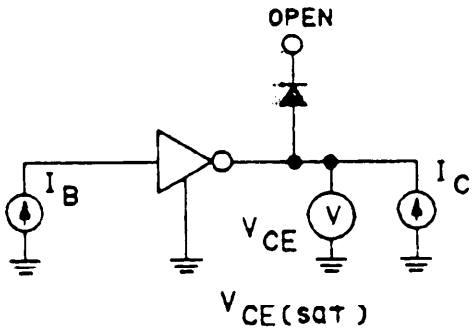



(For device types 02, 03, 04, 05, 07, 09, and 10 only.)

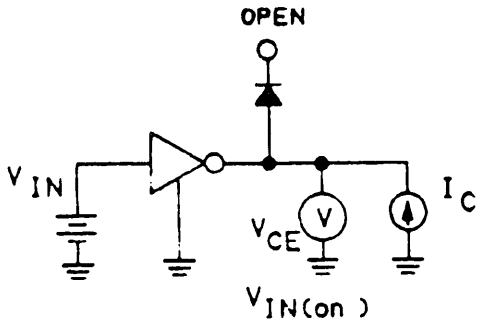

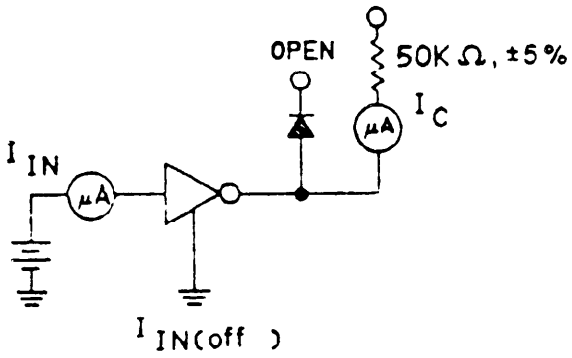

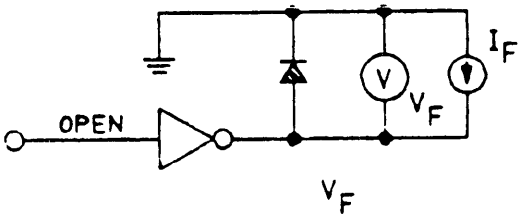

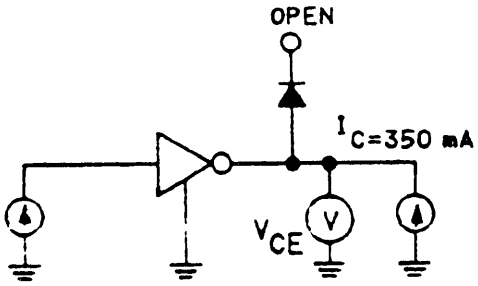

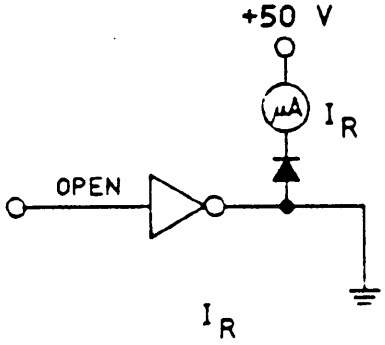


$$h_{FE} = \frac{I_C}{I_B} = \frac{350\ mA}{I_B}$$


Increase current I_B and measure V_{CE}, when V_{CE} = 2.0 V record I_B.

FIGURE 7. Test circuit for static tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 01 and 06

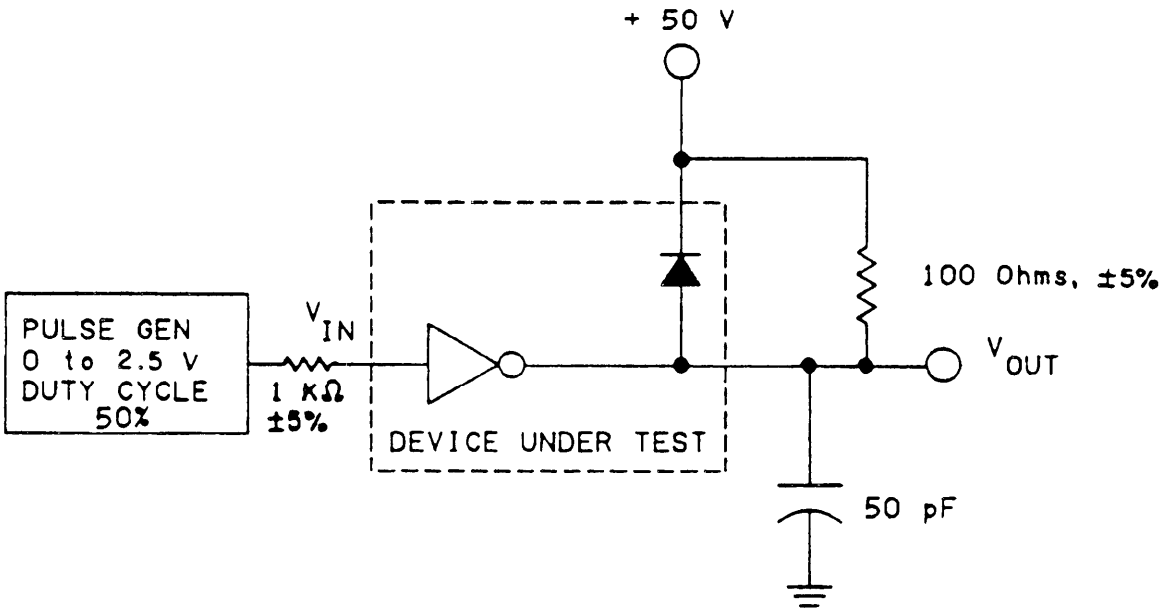

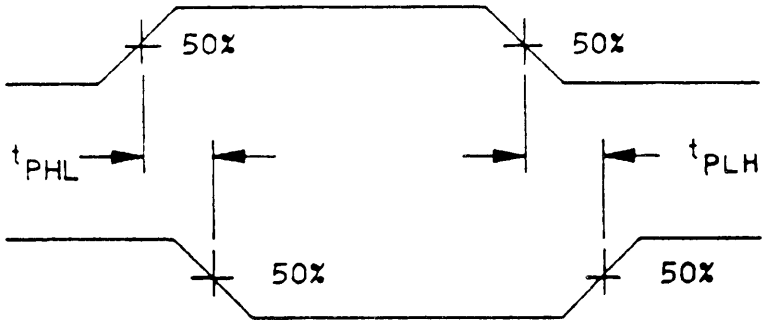



NOTES:
1. f = 10 kHz.
2. Duty cycle = 50 percent.
3. External 1 kΩ resistor.

FIGURE 8. Switching time test circuits and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 02 and 07

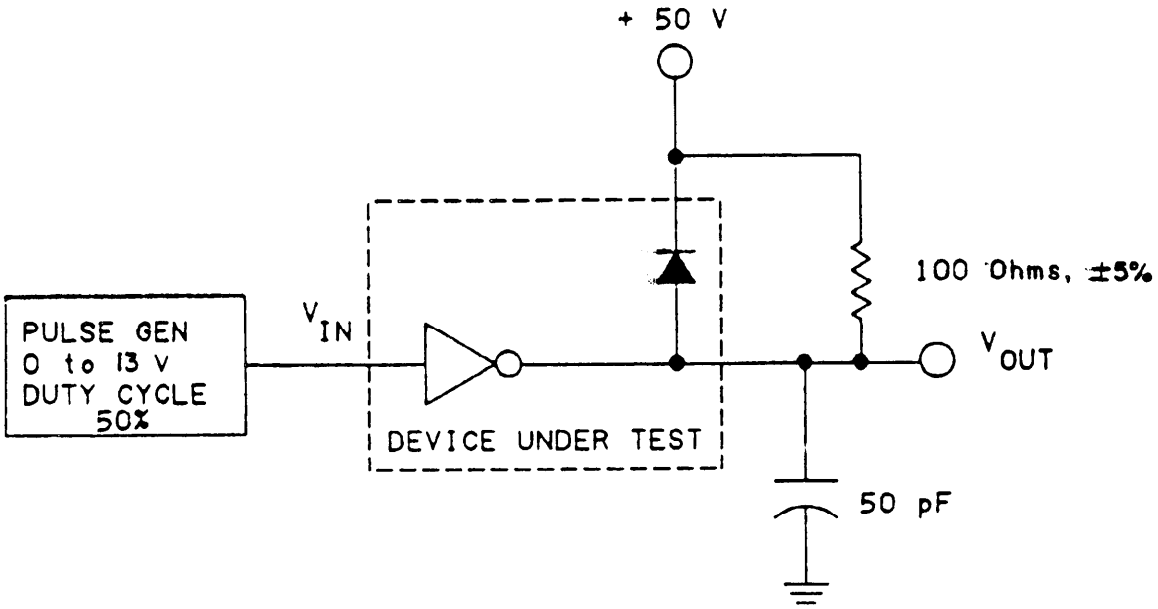

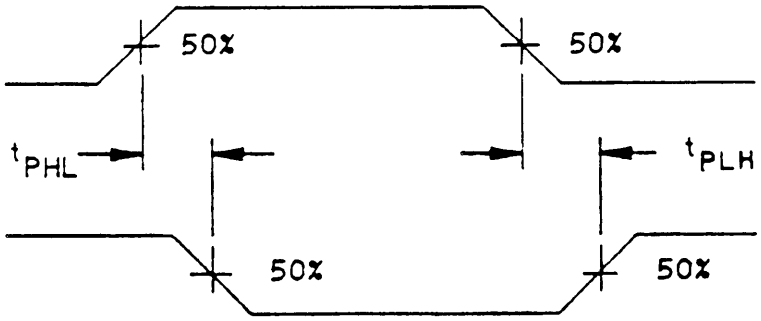



NOTES:
1. f = 10 kHz.
2. Duty cycle = 50 percent.

FIGURE 8. Switching time test circuits and waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 03 and 08

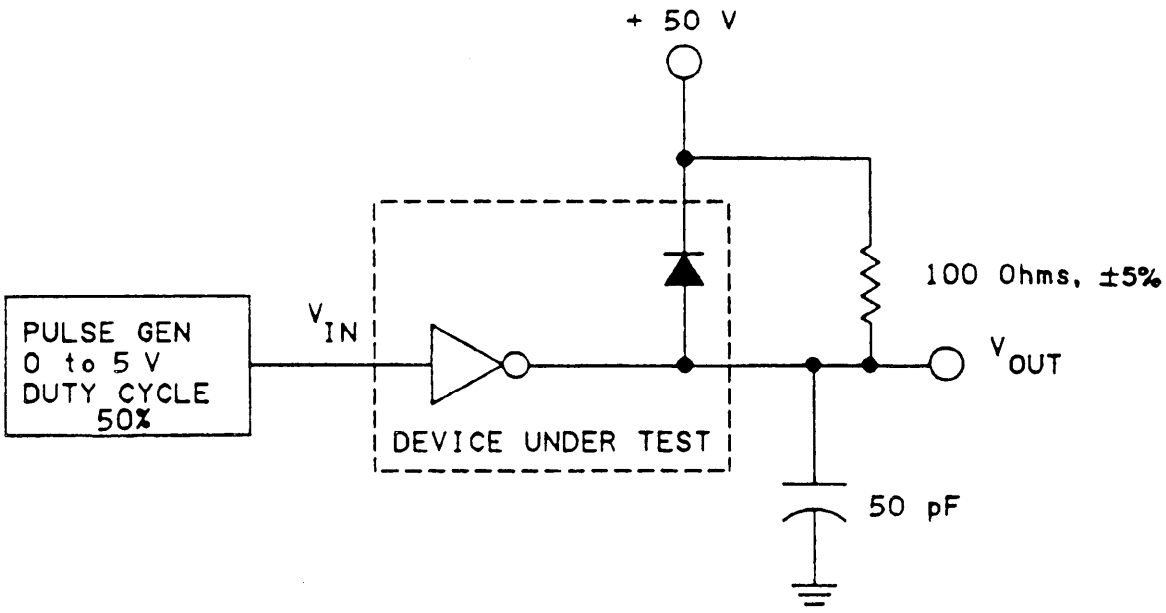

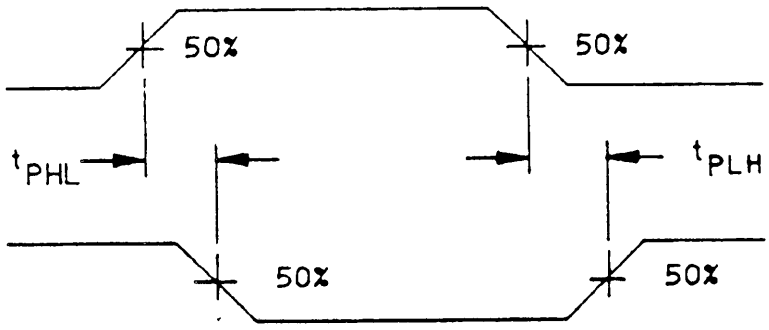



NOTES:
1. f = 10 kHZ.
2. Duty cycle = 50 percent.

FIGURE 8. Switching time test circuits and waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 04 and 09

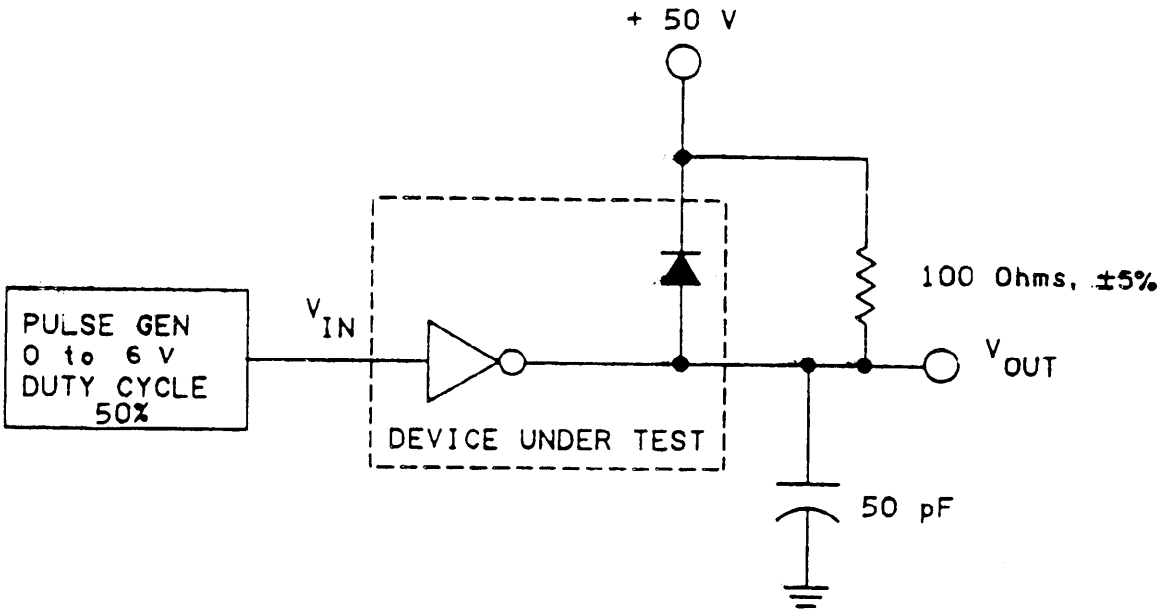

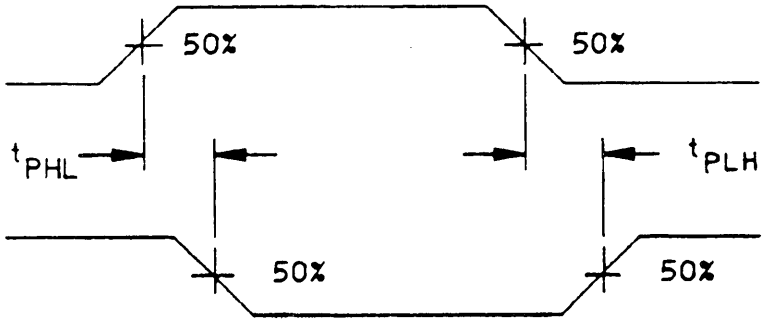



NOTES:
1. f = 10 kHz.
2. Duty cycle = 50 percent.

FIGURE 8. Switching time test circuits and waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 05 and 10

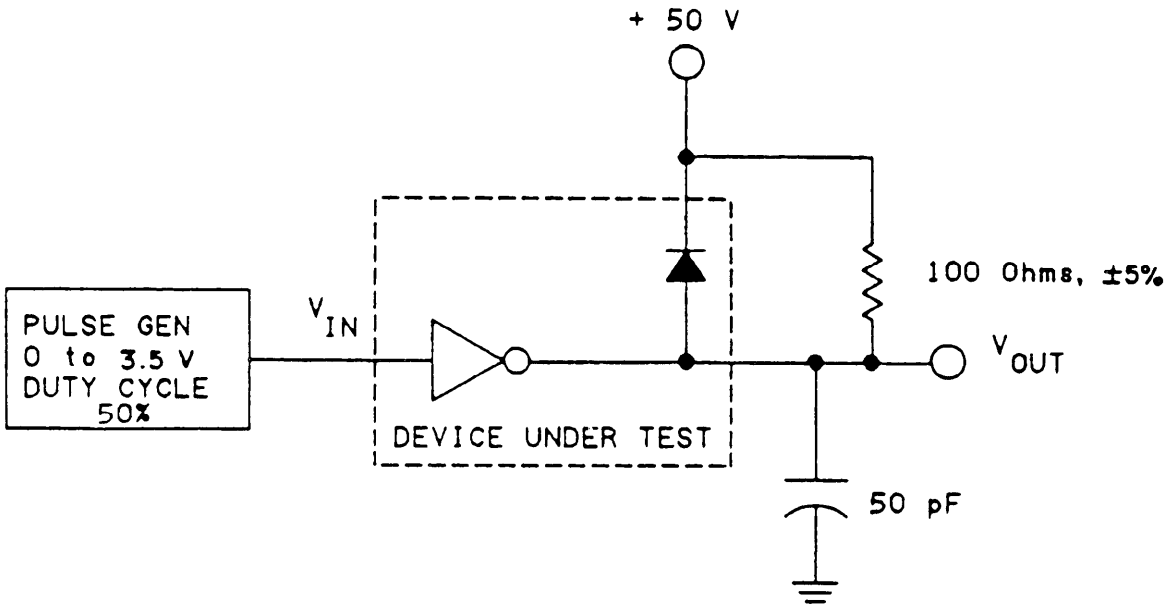

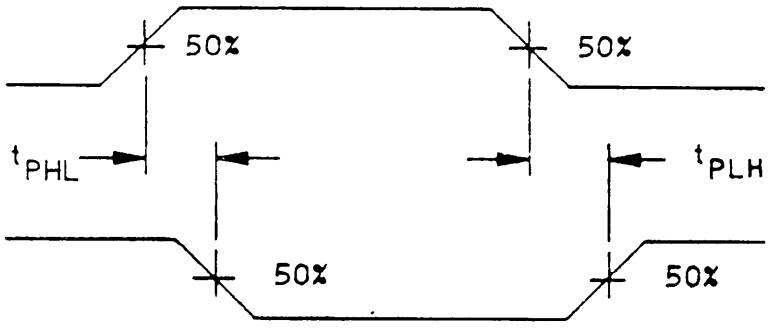


NOTES:
1. f = 10 kHZ.
2. Duty cycle = 50 percent.

FIGURE 8. Switching time test circuits and waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 01, 02, 03, 04 and 05

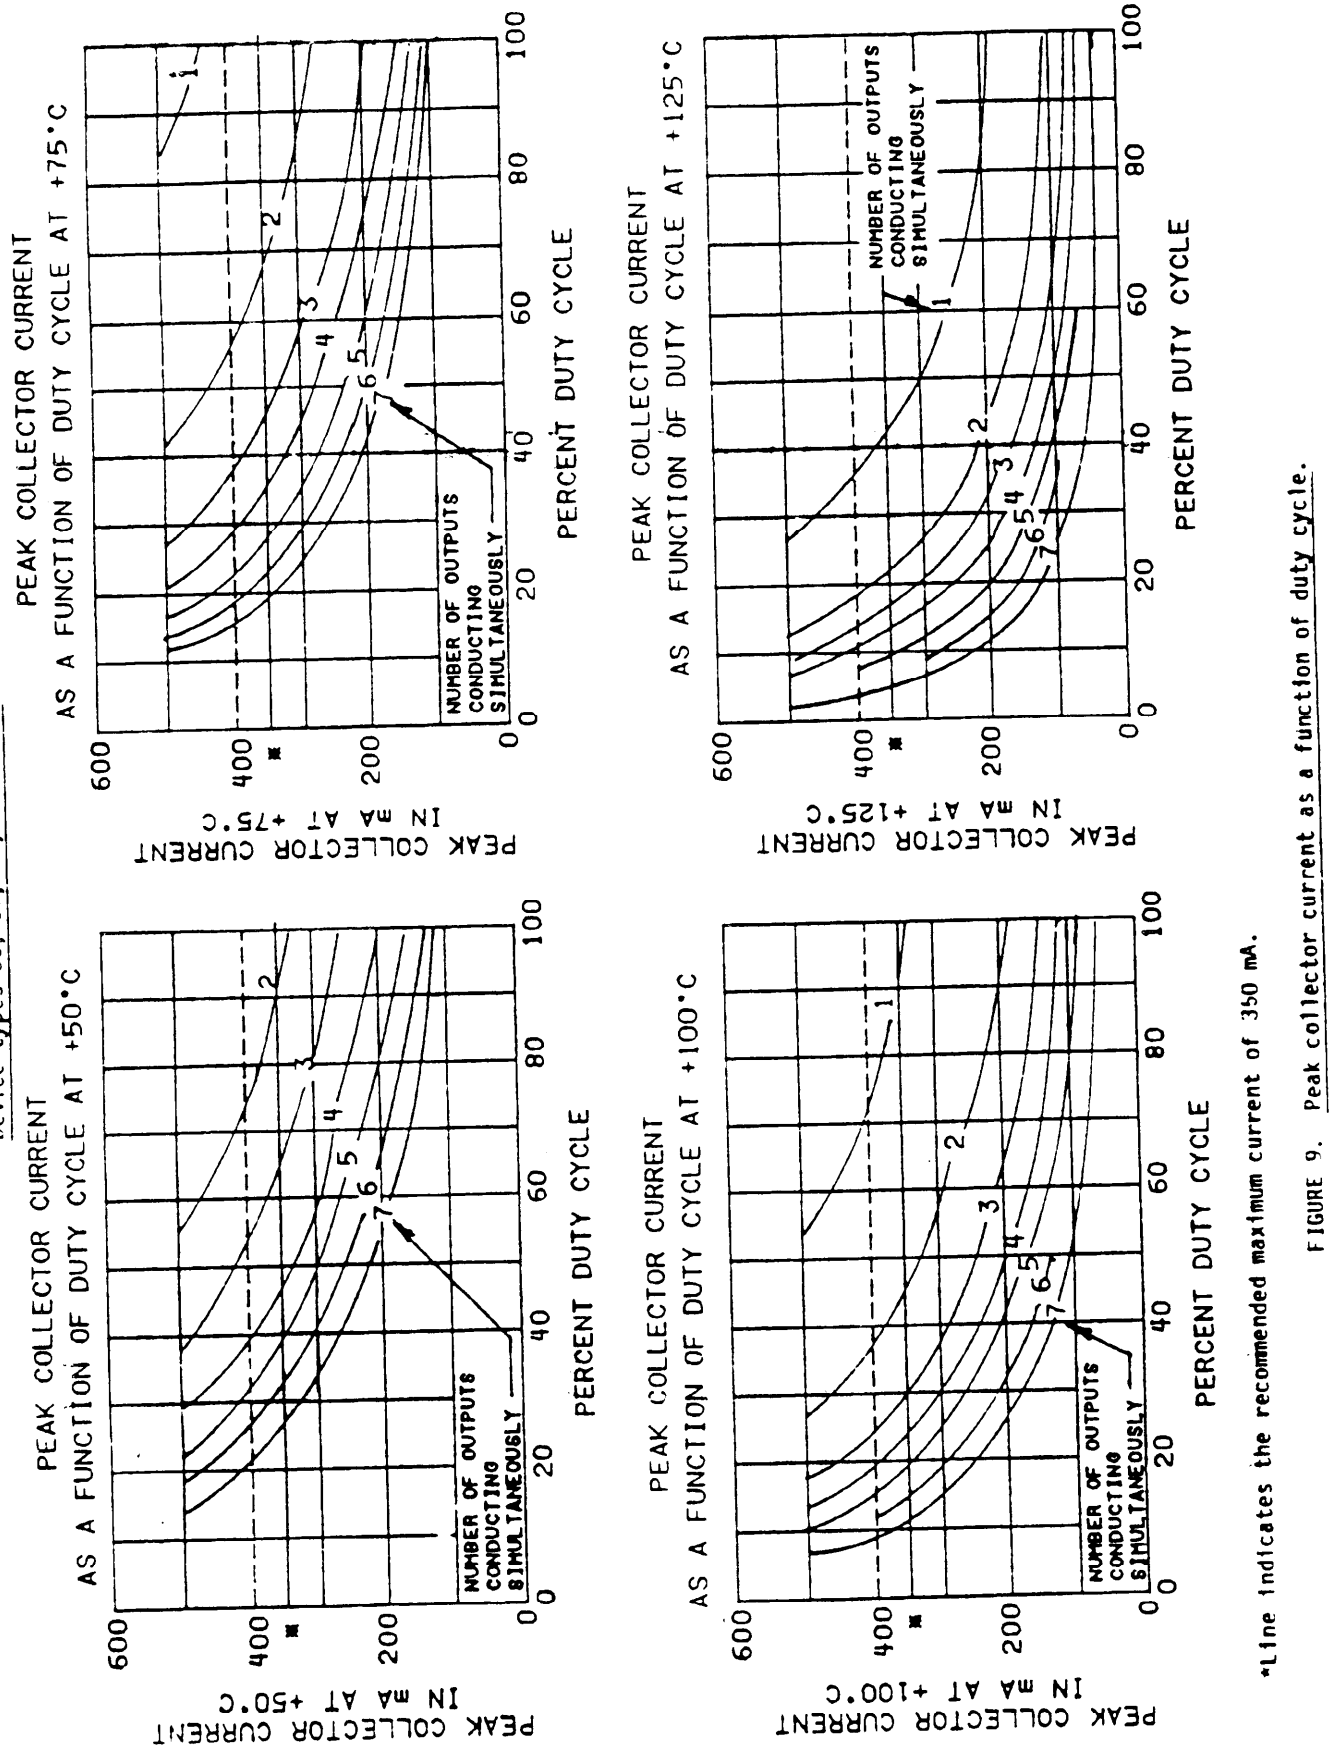


*Line indicates the recommended maximum current of 350 mA.

FIGURE 9. Peak collector current as a function of duty cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

Device types 06, 07, 08, 09 and 10

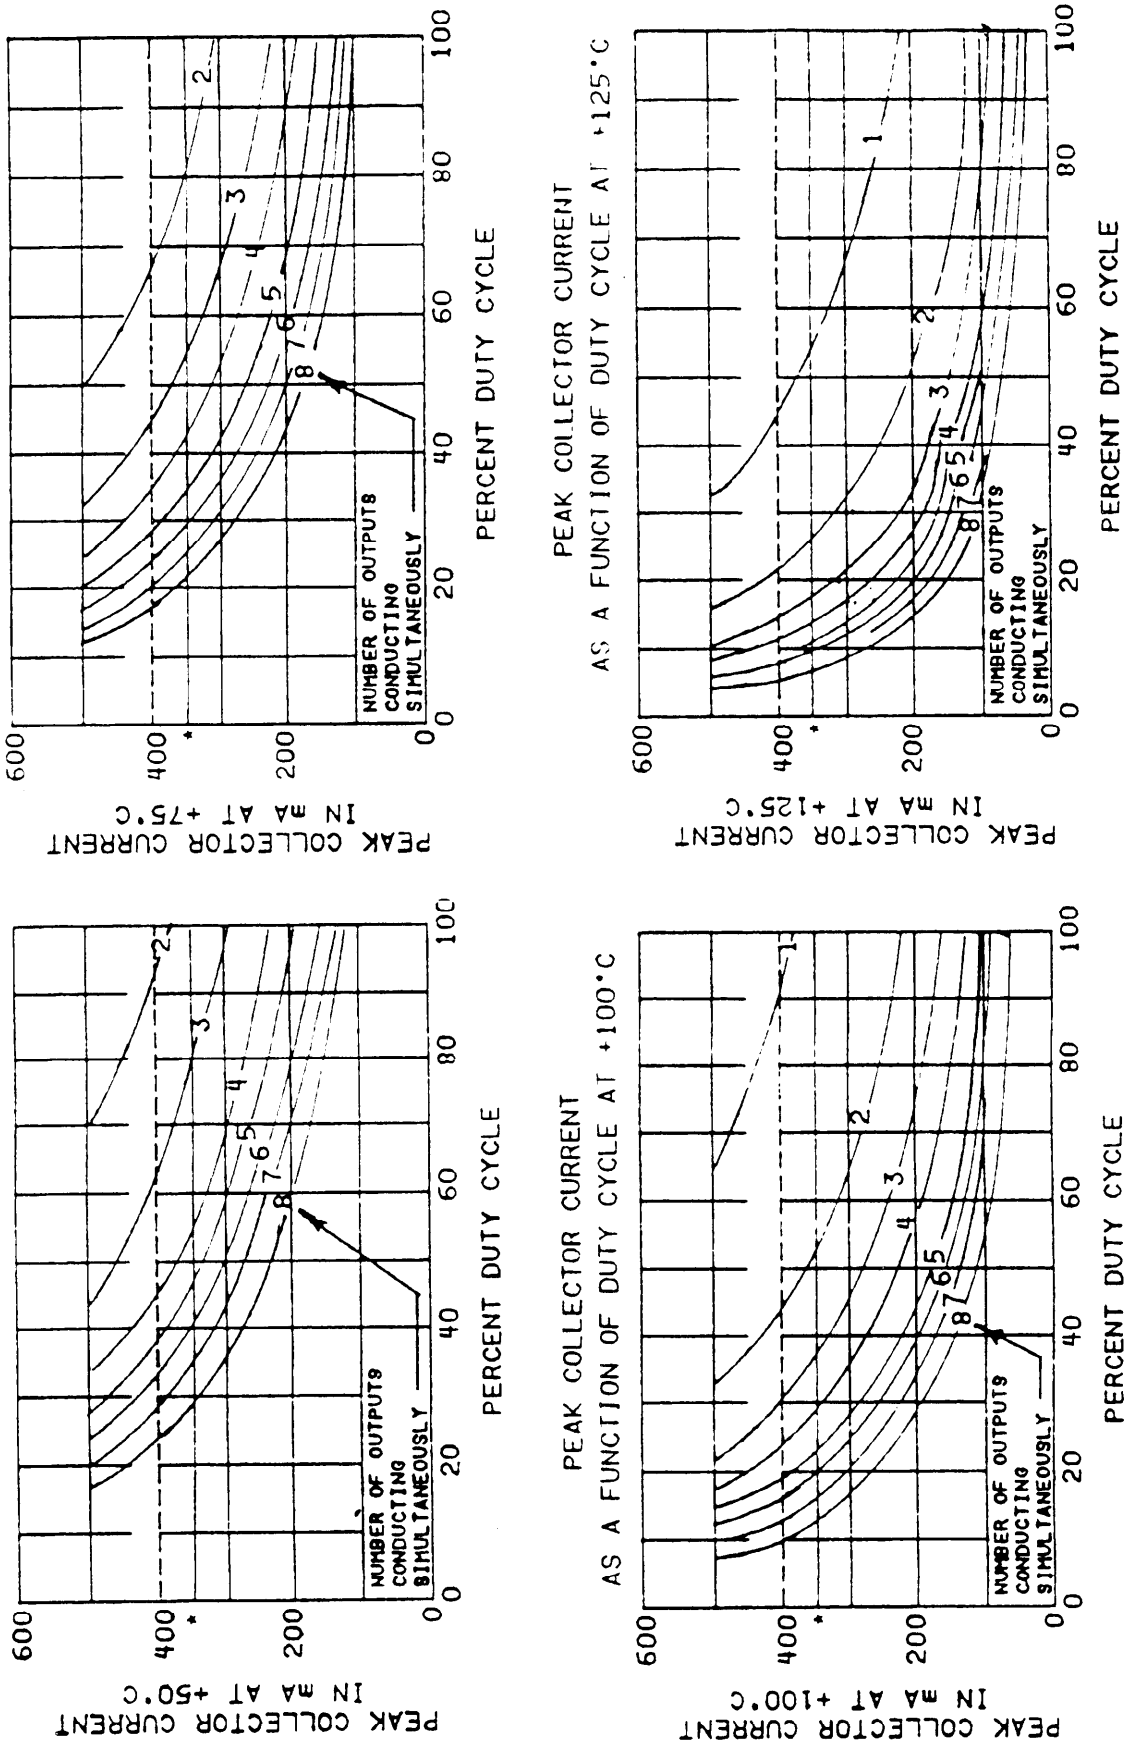

* Line indicates the maximum current of 350 mA.

FIGURE 9. Peak collector current as a function of duty cycle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits Min	Limits Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A @ +25°C	I_{CEX}		1 2 3 4 5 6 7								0 V		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0	µA
	$V_{CE(sat)}$	3007	8 9 10 11 12 13 14	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.6	V
	$V_{CE(sat)}$	3007	15 16 17 18 19 20 21	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3	V
	$V_{CE(sat)}$	3007	22 23 24 25 26 27 28	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.1	V
	$I_{IN(off)}$		29 30 31 32 33 34 35	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA			50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500	µA
	I_R		36 37 38 39 40 41 42									50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0	V
	V_F		43 44 45 46 47 48 49									0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
	h_{FF}	3003	50 51 52 53 54 55 56	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1 OUT_1 IB_2 OUT_2 IB_3 OUT_3 IB_4 OUT_4 IB_5 OUT_5 IB_6 OUT_6 IB_7 OUT_7	1000		

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	I_{CEX}		57 58 59 60 61 62 63								0 V " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0 " " " " " "	µA " " " " " "
	$V_{CE(sat)}$	3007	64 65 66 67 68 69 70	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8 " " " " " "	V " " " " " "
	$V_{CE(sat)}$	3007	71 72 73 74 75 76 77	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5 " " " " " "	" " " " " " "
	$V_{CE(sat)}$	3007	78 79 80 81 82 83 84	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	" " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3 " " " " " "	" " " " " " "
	$I_{IN(off)}$		85 86 87 88 89 90 91	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	µA " " " " " "
	I_R		92 93 94 95 96 97 98								" " " " " " "	50 V " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0 " " " " " "	" " " " " " "
	V_F		99 100 101 102 103 104 105								" " " " " " "	0 V " " " " " "	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	h_{FE}	3003	106 107 108 109 110 111 112	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1 OUT_1 IB_2 OUT_2 IB_3 OUT_3 IB_4 OUT_4 IB_5 OUT_5 IB_6 OUT_6 IB_7 OUT_7	1000 " " " " " "		

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = 55°C	I_{CEX}		113 114 115 116 117 118 119								0 V		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0	µA
	$V_{CE(sat)}$	3007	120 121 122 123 124 125 126	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8	V
	$V_{CE(sat)}$	3007	127 128 129 130 131 132 133	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5	V
	$V_{CE(sat)}$	3007	134 135 136 137 138 139 140	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3	V
	$I_{IN(off)}$		141 142 143 144 145 146 147	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA			50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500	µA
	I_R		148 149 150 151 152 153 154									50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0	
	V_F		155 156 157 158 159 160 161									0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
	h_{FE}	3003	162 163 164 165 166 167 168	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	500		

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig 8.	169 170 171 172 173 174 175	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	0 V " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		750 " " " " " "	ns " " " " " "
	t_{PHL}	3003 Fig 8.	176 177 178 179 180 181 182	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	" " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		300 " " " " " "	" " " " " " "

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.

Subgroup	Symbol	MIL-STD-883, method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1 2 3 4 5 6 7								0 V " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0 " " " " " "	μA " " " " " "
	$V_{CE(sat)}$	3007	8 9 10 11 12 13 14	500 μA	500 μA	500 μA	500 μA	500 μA	500 μA	500 μA	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.6 " " " " " "	V " " " " " "
	$V_{CE(sat)}$	3007	15 16 17 18 19 20 21	350 μA	350 μA	350 μA	350 μA	350 μA	350 μA	350 μA	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3 " " " " " "	" " " " " " "
	$V_{CE(sat)}$	3007	22 23 24 25 26 27 28	250 μA	250 μA	250 μA	250 μA	250 μA	250 μA	250 μA	" " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.1 " " " " " "	" " " " " " "
	$I_{IN(on)}$		29 30 31 32 33 34 35	17 V	17 V	17 V	17 V	17 V	17 V	17 V	" " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	575 " " " " " "	1300 " " " " " "	μA " " " " " "
	$I_{IN(off)}$		36 37 38 39 40 41 42	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$		43 44 45 46 47 48 49	13 V	13 V	13 V	13 V	13 V	13 V	13 V	" " " " " " "		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_R		50 51 52 53 54 55 56								0 V	50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0	µA
	V_F		57 58 59 60 61 62 63									0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
	h_{FE}	3003	64 65 66 67 68 69 70	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	1000		
2 T_A = +125°C	I_{CEX}		71 72 73 74 75 76 77										50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0	µA
	$V_{CE(sat)}$	3007	78 79 80 81 82 83 84	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8	V
	$V_{CE(sat)}$	3007	85 86 87 88 89 90 91	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5	"
	$V_{CE(sat)}$	3007	92 93 94 95 96 97 98	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(on)}$		99 100 101 102 103 104 105	17 V	17 V	17 V	17 V	17 V	17 V	17 V	0 V " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	575 " " " " " "	1300 " " " " " "	µA " " " " " "
	$I_{IN(off)}$		106 107 108 109 110 111 112	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$		113 114 115 116 117 118 119	13 V	13 V	13 V	13 V	13 V	13 V	13 V	" " " " " " "		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	I_R		120 121 122 123 124 125 126								" " " " " " "	50 V " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0 " " " " " "	µA " " " " " "
	V_F		127 128 129 130 131 132 133								" " " " " " "	0 V " " " " " "	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	h_{FE}	3003	134 135 136 137 138 139 140	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	1000 " " " " " "		
3 T_A = -55°C	I_{CEX}		141 142 143 144 145 146 147								" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0 " " " " " "	µA " " " " " "
	$V_{CE(sat)}$	3007	148 149 150 151 152 153 154	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8 " " " " " "	V " " " " " "

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits Min	Limits Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = 25°C	$V_{CE(sat)}$	3007	155 156 157 158 159 160 161	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	0 V " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5 " " " " " "	V " " " " " "
	$V_{CE(sat)}$	3007	162 163 164 165 166 167 168	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	" " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3 " " " " " "	" " " " " " "
	$I_{IN(on)}$		169 170 171 172 173 174 175	17 V	17 V	17 V	17 V	17 V	17 V	17 V	" " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	575 " " " " " "	1300 " " " " " "	µA " " " " " "
	$I_{IN(off)}$		176 177 178 179 180 181 182	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$		183 184 185 186 187 188 189	18 V	18 V	18 V	18 V	18 V	18 V	18 V	" " " " " " "		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	I_R		190 191 192 193 194 195 196								" " " " " " "	50 V " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0 " " " " " "	µA " " " " " "
	V_F		197 198 199 200 201 202 203								" " " " " " "	0 V " " " " " "	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	h_{FE}	3003	204 205 206 207 208 209 210	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	500 " " " " " "		

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig 8.	211 212 213 214 215 216 217	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	0 V " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		750 " " " " " "	ns " " " " " "
	t_{PHL}	3003 Fig 8.	218 219 220 221 222 223 224	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	" " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		300 " " " " " "	" " " " " " "

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1 2 3 4 5 6 7								0 V " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0 " " " " " "	µA " " " " " "
	$V_{CE(sat)}$	3007	8 9 10 11 12 13 14	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.6 " " " " " "	V " " " " " "
	$V_{CE(sat)}$	3007	15 16 17 18 19 20 21	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3 " " " " " "	" " " " " " "
	$V_{CE(sat)}$	3007	22 23 24 25 26 27 28	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	" " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.1 " " " " " "	" " " " " " "
	$I_{IN(on)}$		29 30 31 32 33 34 35	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	" " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	650 " " " " " "	1350 " " " " " "	µA " " " " " "
	$I_{IN(off)}$		36 37 38 39 40 41 42	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$		43 44 45 46 47 48 49	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	$V_{IN(on)}$		50 51 52 53 54 55 56	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	" " " " " " "		250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		" " " " " " "	" " " " " " "

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A, T_C +25°C	$V_{IN(on)}$		57 58 59 60 61 62 63	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	0 V		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
	I_R		64 65 66 67 68 69 70									50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0	µA
	V_F		71 72 73 74 75 76 77									0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
	h_{FE}	3003	78 79 80 81 82 83 84	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	1000		
2 T_A = +125°C	I_{CEX}		85 86 87 88 89 90 91										50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0	µA
	$V_{CE(sat)}$	3007	92 93 94 95 96 97 98	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8	V
	$V_{CE(sat)}$	3007	99 100 101 102 103 104 105	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5	V
	$V_{CE(sat)}$	3007	106 107 108 109 110 111 112	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3	V

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(on)}$		113 114 115 116 117 118 119	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	0 V " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	650 " " " " " "	1350 " " " " " "	µA " " " " " "
	$I_{IN(off)}$		120 121 122 123 124 125 126	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$		127 128 129 130 131 132 133	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	$V_{IN(on)}$		134 135 136 137 138 139 140	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	" " " " " " "		250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7			
	$V_{IN(on)}$		141 142 143 144 145 146 147	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	" " " " " " "		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7			
	I_R		148 149 150 151 152 153 154								" " " " " " "	50 V " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0 " " " " " "	µA " " " " " "
	V_F		155 156 157 158 159 160 161								" " " " " " "	0 V " " " " " "	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	h_{FE}	3003	162 163 164 165 166 167 168	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	1000 " " " " " "		

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = 55°C	I_{CEX}		169 170 171 172 173 174 175								0 V " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0	µA
	$V_{CE(sat)}$	3007	176 177 178 179 180 181 182	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8	V
	$V_{CE(sat)}$	3007	183 184 185 186 187 188 189	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5	"
	$V_{CE(sat)}$	3007	190 191 192 193 194 195 196	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	" " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3	"
	$I_{IN(on)}$		197 198 199 200 201 202 203	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	" " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	650	1350	µA
	$I_{IN(off)}$		204 205 206 207 208 209 210	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500	"
	$V_{IN(on)}$		211 212 213 214 215 216 217	2.6 V	2.6 V	2.6 V	2.6 V	2.6 V	2.6 V	2.6 V	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
	$V_{IN(on)}$		218 219 220 221 222 223 224	2.8 V	2.8 V	2.8 V	2.8 V	2.8 V	2.8 V	2.8 V	" " " " " " "		250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7			"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$V_{IN(on)}$		225 226 227 228 229 230 231	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	0 V " " " " " "		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	I_R		232 233 234 235 236 237 238								" " " " " " "	50 V " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0 " " " " " "	µA " " " " " "
	V_F [1]		239 240 241 242 243 244 245								" " " " " " "	0 V " " " " " "	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	h_{FE}	3003	246 247 248 249 250 251 252	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	500 " " " " " "		
9 T_A = +25°C	t_{PLH}	3003 Fig 8.	253 254 255 256 257 258 259	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	" " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		750 " " " " " "	ns " " " " " "
	t_{PHL}	3003 Fig 8.	260 261 262 263 264 265 266	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	" " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		300 " " " " " "	" " " " " " "

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Measured terminal	Limits Min	Limits Max	Unit	Pin number and signal designation 1 IN1	2 IN2	3 IN3	4 IN4	5 IN5	6 IN6	7 IN7	8 GND	9 COM	10 OUT7	11 OUT6	12 OUT5	13 OUT4	14 OUT3	15 OUT2	16 OUT1
1 T_A = +25°C	I_{CEX}		1	OUT1		10.0	µA								0 V		50 V					50 V
			2	OUT2																	50 V	
			3	OUT3																50 V		
			4	OUT4															50 V			
			5	OUT5														50 V				
			6	OUT6													50 V					
			7	OUT7												50 V						
	$V_{CE(sat)}$	3007	8	OUT1		1.6	V	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA					350 mA
			9	OUT2																	350 mA	
			10	OUT3																350 mA		
			11	OUT4															350 mA			
			12	OUT5														350 mA				
			13	OUT6													350 mA					
			14	OUT7												350 mA						
	$V_{CE(sat)}$	3007	15	OUT1		1.3	V	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA					200 mA
			16	OUT2																	200 mA	
			17	OUT3																200 mA		
			18	OUT4															200 mA			
			19	OUT5														200 mA				
			20	OUT6													200 mA					
			21	OUT7												200 mA						
	$V_{CE(sat)}$	3007	22	OUT1		1.1	V	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA					100 mA
			23	OUT2																	100 mA	
			24	OUT3																100 mA		
			25	OUT4															100 mA			
			26	OUT5														100 mA				
			27	OUT6													100 mA					
			28	OUT7												100 mA						
	$I_{IN(on)}$		29	IN1	250	500	µA	15.0 V														
			30	IN2					15.0 V													
			31	IN3						15.0 V												
			32	IN4							15.0 V											
			33	IN5								15.0 V										
			34	IN6									15.0 V									
			35	IN7										15.0 V								
	$I_{IN(on)}$		36	IN1	750	1450	µA	12.0 V														
			37	IN2					12.0 V													
			38	IN3						12.0 V												
			39	IN4							12.0 V											
			40	IN5								12.0 V										
			41	IN6									12.0 V									
			42	IN7										12.0 V								
	$I_{IN(off)}$		43	OUT1		500	µA	25 µA														
			44	OUT2					25 µA													
			45	OUT3						25 µA												
			46	OUT4							25 µA											
			47	OUT5								25 µA										
			48	OUT6									25 µA									
			49	OUT7										25 µA								
	$V_{IN(on)}$		50	OUT1		2.0	V	5.0 V														
			51	OUT2					5.0 V													
			52	OUT3						5.0 V												
			53	OUT4							5.0 V											
			54	OUT5								5.0 V										
			55	OUT6									5.0 V									
			56	OUT7										5.0 V								
	$V_{IN(on)}$		57	OUT1			V	6.0 V														
			58	OUT2					6.0 V													
			59	OUT3						6.0 V												
			60	OUT4							6.0 V											
			61	OUT5								6.0 V										
			62	OUT6									6.0 V									
			63	OUT7										6.0 V								

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
1 T_A = +25°C	$V_{IN(on)}$		64	IN_1 7.0 V	IN_2 7.0 V	IN_3 7.0 V	IN_4 7.0 V	IN_5 7.0 V	IN_6 7.0 V	IN_7 7.0 V	GND 0 V	COM	OUT_7 275 mA	OUT_6 275 mA	OUT_5 275 mA	OUT_4 275 mA	OUT_3 275 mA	OUT_2 275 mA	OUT_1 275 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
			65																				
			66																				
			67																				
			68																				
			69																				
			70																				
	$V_{IN(on)}$		71	IN_1 8.0 V	IN_2 8.0 V	IN_3 8.0 V	IN_4 8.0 V	IN_5 8.0 V	IN_6 8.0 V	IN_7 8.0 V	GND	COM	OUT_7 350 mA	OUT_6 350 mA	OUT_5 350 mA	OUT_4 350 mA	OUT_3 350 mA	OUT_2 350 mA	OUT_1 350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7			
			72																				
			73																				
			74																				
			75																				
			76																				
			77																				
	I_R		78									50 V	OUT_7 0 V	OUT_6 0 V	OUT_5 0 V	OUT_4 0 V	OUT_3 0 V	OUT_2 0 V	OUT_1 0 V	COM COM COM COM COM COM COM		10.0	µA
			79																				
			80																				
			81																				
			82																				
			83																				
			84																				
	V_F		85									0 V	OUT_7 350 mA	OUT_6 350 mA	OUT_5 350 mA	OUT_4 350 mA	OUT_3 350 mA	OUT_2 350 mA	OUT_1 350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
			86																				
			87																				
			88																				
			89																				
			90																				
			91																				
	V_{FF}	3003	92	IB_1	IB_2	IB_3	IB_4	IB_5		IB_7			OUT_7 350 mA	OUT_6 350 mA	OUT_5 350 mA	OUT_4 350 mA	OUT_3 350 mA	OUT_2 350 mA	OUT_1 350 mA	IB_1 OUT_1 IB_2 OUT_2 IB_3 OUT_3 IB_4 OUT_4 IB_5 OUT_5 IB_6 OUT_6 IB_7 OUT_7	1000		
			93																				
			94																				
			95																				
			96																				
			97																				
			98																				
2 T_A = +125°C	I_{CEX}		99										OUT_7 50 V	OUT_6 50 V	OUT_5 50 V	OUT_4 50 V	OUT_3 50 V	OUT_2 50 V	OUT_1 50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0	µA
			100																				
			101																				
			102																				
			103																				
			104																				
			105																				
	$V_{CE(sat)}$	3007	106	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			OUT_7 350 mA	OUT_6 350 mA	OUT_5 350 mA	OUT_4 350 mA	OUT_3 350 mA	OUT_2 350 mA	OUT_1 350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8	V
			107																				
			108																				
			109																				
			110																				
			111																				
			112																				
	$V_{CE(sat)}$	3007	113	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			OUT_7 200 mA	OUT_6 200 mA	OUT_5 200 mA	OUT_4 200 mA	OUT_3 200 mA	OUT_2 200 mA	OUT_1 200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5	V
			114																				
			115																				
			116																				
			117																				
			118																				
			119																				
	$V_{CE(sat)}$	3007	120	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			OUT_7 100 mA	OUT_6 100 mA	OUT_5 100 mA	OUT_4 100 mA	OUT_3 100 mA	OUT_2 100 mA	OUT_1 100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3	V
			121																				
			122																				
			123																				
			124																				
			125																				
			126																				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for dev : type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(on)}$		127 128 129 130 131 132 133	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	0 V " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	250 " " " " " "	500 " " " " " "	µA " " " " " "
	$I_{IN(on)}$		134 135 136 137 138 139 140	12.0 V	12.0 V	12.0 V	12.0 V	12.0 V	12.0 V	12.0 V	" " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	750 " " " " " "	1450 " " " " " "	" " " " " " "
	$I_{IN(off)}$		141 142 143 144 145 146 147	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$ *		148 149 150 151 152 153 154	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	" " " " " " "		125 mA	125 mA	125 mA	125 mA	125 mA	125 mA	125 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	$V_{IN(on)}$		155 156 157 158 159 160 161	6.0 V	6.0 V	6.0 V	6.0 V	6.0 V	6.0 V	6.0 V	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		" " " " " " "	" " " " " " "
	$V_{IN(on)}$		162 163 164 165 166 167 168	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	" " " " " " "		275 mA	275 mA	275 mA	275 mA	275 mA	275 mA	275 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		" " " " " " "	" " " " " " "
	$V_{IN(on)}$		169 170 171 172 173 174 175	8.0 V	8.0 V	8.0 V	8.0 V	8.0 V	8.0 V	8.0 V	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		" " " " " " "	" " " " " " "
	I_R		176 177 178 179 180 181 182								" " " " " " "	50 V " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0 " " " " " "	µA " " " " " "

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	V_f		183 184 185 186 187 188 189								0 V " " " " " "	0 V " " " " " "	 350 mA	 350 mA 	 350 mA 	 350 mA 	 350 mA 	150 mA 	350 mA 	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	h_{FE}	3003	190 191 192 193 194 195 196	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	1000 " " " " " "		
3 T_A = -55°C	I_{CEX}		197 198 199 200 201 202 203								 		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0 " " " " " "	µA " " " " " "
	$V_{CE(sat)}$	3007	204 205 206 207 208 209 210	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	 		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8 " " " " " "	V " " " " " "
	$V_{CE(sat)}$	3007	211 212 213 214 215 216 217	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	 		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5 " " " " " "	" " " " " " "
	$V_{CE(sat)}$	3007	218 219 220 221 222 223 224	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	 		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3 " " " " " "	" " " " " " "
	$I_{IN(on)}$		225 226 227 228 229 230 231	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	 									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	250 " " " " " "	500 " " " " " "	µA " " " " " "
	$I_{IN(on)}$		232 233 234 235 236 237 238	12.0 V	12.0 V	12.0 V	12.0 V	12.0 V	12.0 V	12.0	 									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	750 " " " " " "	1450 " " " " " "	" " " " " " "

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits Min	Limits Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = 55°C	$I_{IN(off)}$		239	25 µA							0 V								50 V	OUT_1		500	µA
			240		25 µA						"									OUT_2		"	"
			241			25 µA					"									OUT_3		"	"
			242				25 µA				"							50 V		OUT_4		"	"
			243					25 µA			"									OUT_5		"	"
			244						25 µA		"									OUT_6		"	"
			245							25 µA	"		50 V							OUT_7		"	"
	$V_{IN(on)}$		246	6.0 V							"								125 mA	OUT_1		2.0	V
			247		6.0 V						"									OUT_2		"	"
			248			6.0 V					"									OUT_3		"	"
			249				6.0 V				"						125 mA			OUT_4		"	"
			250					6.0 V			"				125 mA					OUT_5		"	"
			251						6.0 V		"									OUT_6		"	"
			252							6.0 V	"		125 mA							OUT_7		"	"
	$V_{IN(on)}$		253	8.0 V							"								200 mA	OUT_1			
			254		8.0 V						"									OUT_2			
			255			8.0 V					"									OUT_3			
			256				8.0 V				"						200 mA			OUT_4			
			257					8.0 V			"				200 mA					OUT_5			
			258						8.0 V		"			200 mA						OUT_6			
			259							8.0 V	"		200 mA							OUT_7			
	$V_{IN(on)}$		260	10.0 V							"								275 mA	OUT_1			
			261		10.0 V						"									OUT_2			
			262			10.0 V					"									OUT_3			
			263				10.0 V				"						275 mA			OUT_4			
			264					10.0 V			"				275 mA					OUT_5			
			265						10.0 V		"			275 mA						OUT_6			
			266							10.0 V	"		275 mA							OUT_7			
	$V_{IN(on)}$		267	12.0 V							"								350 mA	OUT_1			
			268		12.0 V						"									OUT_2			
			269			12.0 V					"									OUT_3			
			270				12.0 V				"						350 mA			OUT_4			
			271					12.0 V			"				350 mA					OUT_5			
			272						12.0 V		"			350 mA						OUT_6			
			273							12.0 V	"		350 mA							OUT_7			
	I_R		274								"	50 V								COM		10.0	µA
			275								"	"								COM		"	"
			276								"	"								COM		"	"
			277								"	"								COM		"	"
			278								"	"								COM		"	"
			279								"	"								COM		"	"
			280								"	"	0 V							COM		"	"
	V_F		281								"	0 V								OUT_1		2.0	V
			282								"	"								OUT_2		"	"
			283								"	"								OUT_3		"	"
			284								"	"								OUT_4		"	"
			285								"	"								OUT_5		"	"
			286								"	"								OUT_6		"	"
			287								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	288	IB_1							"								350 mA	IB_1 OUT_1	500		
			289		IB_2						"									IB_2 OUT_2	"		
			290			IB_3					"									IB_3 OUT_3	"		
			291				IB_4				"									IB_4 OUT_4	"		
			292					IB_5			"									IB_5 OUT_5	"		
			293						IB_6		"									IB_6 OUT_6	"		
			294							IB_7	"		350 mA							IB_7 OUT_7	"		

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 and Fig 8.	295 296 297 298 299 300 301	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	0 V " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		750 " " " " "	ns " " " " "
	t_{PHL}	3003 and Fig 8.	302 303 304 305 306 307 308	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	" " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		300 " " " " "	" " " " "

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1 2 3 4 5 6 7								0 V " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0 " " " " " "	µA " " " " " "
	$V_{CE(sat)}$	3007	8 9 10 11 12 13 14	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.6 " " " " " "	V " " " " " "
	$V_{CE(sat)}$	3007	15 16 17 18 19 20 21	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3 " " " " " "	" " " " " " "
	$V_{CE(sat)}$	3007	22 23 24 25 26 27 28	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	" " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.1 " " " " " "	" " " " " " "
	$I_{IN(on)}$		29 30 31 32 33 34 35	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	" " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	1180 " " " " " "	2400 " " " " " "	µA " " " " " "
	$I_{IN(off)}$		36 37 38 39 40 41 42	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$		43 44 45 46 47 48 49	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_R		50 51 52 53 54 55 56								0 V	50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0	µA
	V_F		57 58 59 60 61 62 63									0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0	V
	h_{FE}	3003	64 65 66 67 68 69 70	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	1000		
2 T_A = +125°C	I_{CEX}		71 72 73 74 75 76 77										50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0	µA
	$V_{CE(sat)}$	3007	78 79 80 81 82 83 84	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8	V
	$V_{CE(sat)}$	3007	85 86 87 88 89 90 91	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5	
	$V_{CE(sat)}$	3007	92 93 94 95 96 97 98	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(on)}$		99 100 101 102 103 104 105	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	0 V " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	1180 " " " " " "	2400 " " " " " "	μA " " " " " "
	$I_{IN(off)}$		106 107 108 109 110 111 112	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$		113 114 115 116 117 118 119	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	I_R		120 121 122 123 124 125 126								" " " " " " "	50 V " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0 " " " " " "	μA " " " " " "
	V_F		127 128 129 130 131 132 133								" " " " " " "	0 V " " " " " "	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	I_{IB}	3003	134 135 136 137 138 139 140	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	1000 " " " " " "		

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = 55°C	I_{CEX}		141 142 143 144 145 146 147								0 V " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		10.0 " " " " " "	µA " " " " " "
	$V_{CE(sat)}$	3007	148 149 150 151 152 153 154	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.8 " " " " " "	V " " " " " "
	$V_{CE(sat)}$	3007	155 156 157 158 159 160 161	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	" " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.5 " " " " " "	" " " " " " "
	$V_{CE(sat)}$	3007	162 163 164 165 166 167 168	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	" " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		1.3 " " " " " "	" " " " " " "
	$I_{IN(on)}$		169 170 171 172 173 174 175	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	" " " " " " "									IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7	1180 " " " " " "	2400 " " " " " "	µA " " " " " "
	$I_{IN(off)}$		176 177 178 179 180 181 182	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		500 " " " " " "	" " " " " " "
	$V_{IN(on)}$		183 184 185 186 187 188 189	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	I_R		190 191 192 193 194 195 196								0 V " " " " " "	50 V " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM		10.0 " " " " " "	µA " " " " " "
	V_F		197 198 199 200 201 202 203								" " " " " " "	0 V " " " " " "	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7		2.0 " " " " " "	V " " " " " "
	h_{FE}	3003	204 205 206 207 208 209 210	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	" " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7	500 " " " " " "		
9 T_A = +25°C	t_{PLH}	3003 and Fig 8.	211 212 213 214 215 216 217	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	" " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		750 " " " " " "	ns " " " " " "
	t_{PHL}	3003 and Fig 8.	218 219 220 221 222 223 224	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	" " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7		300 " " " " " "	" " " " " " "

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	Measured terminal	Limits Min	Limits Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 $T_A = 25°C$	I_{CEX}	3007	1	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	0 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10	µA
			2																						
			3																						
			4																						
			5																						
			6																						
			7																						
			8																						
	$V_{CE(sat)}$	3007	9	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	0 V		50 V	50 V	50 V	50 V	50 V	50 V	50 V	150 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.6	V
			10																						
			11																						
			12																						
			13																						
			14																						
			15																						
			16																						
	$V_{CE(sat)}$	3007	17	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	0 V		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	V
			18																						
			19																						
			20																						
			21																						
			22																						
			23																						
			24																						
	$V_{CE(sat)}$	3007	25	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	0 V		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.1	V
			26																						
			27																						
			28																						
			29																						
			30																						
			31																						
			32																						
	$I_{IN(off)}$		33	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	0 V		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	µA
			34																						
			35																						
			36																						
			37																						
			38																						
			39																						
			40																						
	I_R		41										50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10	µA
			42																						
			43																						
			44																						
			45																						
			46																						
			47																						
			48																						
	V_F		49										0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
			50																						
			51																						
			52																						
			53																						
			54																						
			55																						
			56																						
	I_{HE}	3003	57	I_{B_1}	I_{B_2}	I_{B_3}	I_{B_4}	I_{B_5}	I_{B_6}	I_{B_7}	I_{B_8}											I_{B_1} OUT1 I_{B_2} OUT2 I_{B_3} OUT3 I_{B_4} OUT4 I_{B_5} OUT5 I_{B_6} OUT6 I_{B_7} OUT7 I_{B_8} OUT8	1000		
			58																						
			59																						
			60																						
			61																						
			62																						
			63																						
			64																						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE II. Group A inspection for device type 06 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																	Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	I_{CEX}		65 66 67 68 69 70 71 72									0 V		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0	µA
	$V_{CE(sat)}$	3007	73 74 75 76 77 78 79 80	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.8	V
	$V_{CE(sat)}$	3007	81 82 83 84 85 86 87 88	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.5	V
	$V_{CE(sat)}$	3007	89 90 91 92 93 94 95 96	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	V
	$I_{IN(off)}$		97 98 99 100 101 102 103 104	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	µA
	I_R		105 106 107 108 109 110 111 112											0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0	µA
	V_F		113 114 115 116 117 118 119 120										0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	h_{FE}	3003	121 122 123 124 125 126 127 128	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	IB_8			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7 IB_8-OUT_8	1000		

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																	Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 $T_A = 25°C$	I_{CEX}		129 130 131 132 133 134 135 136									0 V • • • • • • •		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0	µA • • • • • • •
	$V_{CE(sat)}$	3007	137 138 139 140 141 142 143 144	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	• • • • • • • •		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.8	V • • • • • • •
	$V_{CE(sat)}$	3007	145 146 147 148 149 150 151 152	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	• • • • • • • •		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.5	• • • • • • • •
	$V_{CE(sat)}$	3007	153 154 155 156 157 158 159 160	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	• • • • • • • •		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	• • • • • • • •
	$I_{IN(off)}$		161 162 163 164 165 166 167 168	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	• • • • • • • •		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	µA • • • • • • •
	I_R		169 170 171 172 173 174 175 176									• • • • • • • •	50 V • • • • • • •	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0	• • • • • • • •
	V_F		177 178 179 180 181 182 183 184									• • • • • • • •	0 V • • • • • • •	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V • • • • • • •
	h_{FE}	3003	185 186 187 188 189 190 191 192	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	IB_8	• • • • • • • •		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1 OUT_1 IB_2 OUT_2 IB_3 OUT_3 IB_4 OUT_4 IB_5 OUT_5 IB_6 OUT_6 IB_7 OUT_7 IB_8 OUT_8	500		

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Gr Inspection for device type 08 Continued.

Subgroup	Symbol	MIL-STD 883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig 8.	193 194 195 196 197 198 199 200	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	0 V " " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1 OUT_1 IN_2 OUT_2 IN_3 OUT_3 IN_4 OUT_4 IN_5 OUT_5 IN_6 OUT_6 IN_7 OUT_7 IN_8 OUT_8		750 " " " " " " "	ns " " " " " " "
	t_{PHL}	3003 Fig 8.	201 202 203 204 205 206 207 208	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	" " " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1 OUT_1 IN_2 OUT_2 IN_3 OUT_3 IN_4 OUT_4 IN_5 OUT_5 IN_6 OUT_6 IN_7 OUT_7 IN_8 OUT_8		300 " " " " " " "	" " " " " " " "

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																		Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1 2 3 4 5 6 7 8									0 V "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0 " " " " " " "	µA " " " " " " "
	$V_{CE(sat)}$	3007	9 10 11 12 13 14 15 16	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	"		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.6 " " " " " " "	V " " " " " " "
	$V_{CE(sat)}$	3007	17 18 19 20 21 22 23 24	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	"		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3 " " " " " " "	" " " " " " " "
	$V_{CE(sat)}$	3007	25 26 27 28 29 30 31 32	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	"		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.1 " " " " " " "	" " " " " " " "
	$I_{IN(on)}$		33 34 35 36 37 38 39 40	17 V	17 V	17 V	17 V	17 V	17 V	17 V	17 V	"											IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	575 " " " " " " "	1300 " " " " " " "	µA " " " " " " "
	$I_{IN(off)}$		41 42 43 44 45 46 47 48	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	"		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500 " " " " " " "	" " " " " " " "
	$V_{IN(on)}$		49 50 51 52 53 54 55 56	13 V	13 V	13 V	13 V	13 V	13 V	13 V	13 V	"		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0 " " " " " " "	V " " " " " " "
	I_R		57 58 59 60 61 62 63 64									"	50 V "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0 " " " " " " "	µA " " " " " " "

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD 883 method	Test no.	Pin number and signal designation																	Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	V_F		65 66 67 68 69 70 71 72									0 V	0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	h_{FE}	3003	73 74 75 76 77 78 79 80	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	IB_8			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7 IB_8-OUT_8	1000		
2 T_A = +125°C	I_{CEX}		81 82 83 84 85 86 87 88											50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0	µA
	$V_{CE(sat)}$	3007	89 90 91 92 93 94 95 96	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.8	V
	$V_{CE(sat)}$	3007	97 98 99 100 101 102 103 104	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		I_A-5	
	$V_{CE(sat)}$	3007	105 106 107 108 109 110 111 112	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	
	$I_{IN(on)}$		113 114 115 116 117 118 119 120	17 V	17 V	17 V	17 V	17 V	17 V	17 V	17 V											IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	575	1300	µA
	$I_{IN(off)}$		121 122 123 124 125 126 127 128	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA			50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Limits		Unit	Measured terminal
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18				
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1	Min	Max		
2 T_A = +125°C	$V_{I(ON)}$	3007	129	13 V								0 V									300 mA			V	OUT1
			130		13 V															300 mA					OUT2
			131			13 V													100 mA					OUT3
			132				13 V											300 mA						OUT4
			133					13 V									300 mA							OUT5
			134						13 V							300 mA								OUT6
			135							13 V					300 mA									OUT7
			136								13 V			300 mA										OUT8
	I_R		137										50 V								0 V		10.0	μA	COM
			138																						COM
			139																						COM
			140																						COM
			141																						COM
			142																						COM
			143																						COM
			144																						COM
	V_F		145										0 V								350 mA		2.0	V	OUT1
			146																						OUT2
			147																						OUT3
			148																						OUT4
			149															350 mA							OUT5
			150														350 mA								OUT6
			151													350 mA									OUT7
			152												350 mA										OUT8
	h_{FE}	3003	153																		350 mA	1000			IN1 OUT1
			154																		150 mA				IN2 OUT2
			155																		100 mA				IN3 OUT3
			156																		100 mA				IN4 OUT4
			157																		100 mA				IN5 OUT5
			158																		100 mA				IN6 OUT6
			159																		100 mA				IN7 OUT7
			160																		100 mA				IN8 OUT8
3 T_A = 25°C	I_{CEX}		161																		50 V		10.0	μA	OUT1
			162																						OUT2
			163																						OUT3
			164																						OUT4
			165																						OUT5
			166																						OUT6
			167																						OUT7
			168																						OUT8
	$V_{CE(sat)}$	3007	169	850 μA																	350 mA		1.8	V	OUT1
			170		850 μA																350 mA				OUT2
			171			850 μA															350 mA				OUT3
			172				850 μA														350 mA				OUT4
			173					850 μA													350 mA				OUT5
			174						850 μA												350 mA				OUT6
			175							850 μA											350 mA				OUT7
			176								850 μA										350 mA				OUT8
	$V_{CE(sat)}$	3007	177	550 μA																	200 mA		1.5	V	OUT1
			178		550 μA																200 mA				OUT2
			179			550 μA															200 mA				OUT3
			180				550 μA														200 mA				OUT4
			181					550 μA													200 mA				OUT5
			182						550 μA												200 mA				OUT6
			183							550 μA											200 mA				OUT7
			184								550 μA										200 mA				OUT8
	$V_{CE(sat)}$	3007	185	350 μA																	100 mA		1.3	V	OUT1
			186		350 μA																100 mA				OUT2
			187			350 μA															100 mA				OUT3
			188				350 μA														100 mA				OUT4
			189					350 μA													100 mA				OUT5
			190						350 μA												100 mA				OUT6
			191							350 μA											100 mA				OUT7
			192								350 μA										100 mA				OUT8

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	Measured terminal	Limits Min	Limits Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_C = -55°C	$I_{IN(on)}$		193 194 195 196 197 198 199 200	17 V	17 V	17 V	17 V	17 V	17 V	17 V	17 V	0 V										IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	575	1300	µA
	$I_{IN(off)}$		201 202 203 204 205 206 207 208	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA			50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	
	$V_{IN(on)}$		209 210 211 212 213 214 215 216	18 V	18 V	18 V	18 V	18 V	18 V	18 V	18 V			300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	I_R		217 218 219 220 221 222 223 224										50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0	µA
	V_F		225 226 227 228 229 230 231 232										0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	h_{FE}	3003	233 234 235 236 237 238 239 240	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	IB_8			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1 OUT_1 IB_2 OUT_2 IB_3 OUT_3 IB_4 OUT_4 IB_5 OUT_5 IB_6 OUT_6 IB_7 OUT_7 IB_8 OUT_8	500	-	-
9 T_A = +25°C	t_{PLH}	3003 Fig 8.	241 242 243 244 245 246 247 248	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8			OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1 OUT_1 IN_2 OUT_2 IN_3 OUT_3 IN_4 OUT_4 IN_5 OUT_5 IN_6 OUT_6 IN_7 OUT_7 IN_8 OUT_8		750	ns
	t_{PHL}	3003 Fig 8.	249 250 251 252 253 254 255 256	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8			OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1 OUT_1 IN_2 OUT_2 IN_3 OUT_3 IN_4 OUT_4 IN_5 OUT_5 IN_6 OUT_6 IN_7 OUT_7 IN_8 OUT_8		300	ns

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																		Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1 2 3 4 5 6 7 8									0 V " " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0 " " " " " " "	µA " " " " " " "
	$V_{CE(sat)}$	3007	9 10 11 12 13 14 15 16	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	" " " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.6 " " " " " " "	V " " " " " " "
	$V_{CE(sat)}$	3007	17 18 19 20 21 22 23 24	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	" " " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3 " " " " " " "	" " " " " " " "
	$V_{CE(sat)}$	3007	25 26 27 28 29 30 31 32	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	" " " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.1 " " " " " " "	" " " " " " " "
	$I_{IN(on)}$		33 34 35 36 37 38 39 40	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	" " " " " " " "										IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	650 " " " " " " "	1350 " " " " " " "	µA " " " " " " "
	$I_{IN(off)}$		41 42 43 44 45 46 47 48	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	" " " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500 " " " " " " "	µA " " " " " " "
	$V_{IN(on)}$		49 50 51 52 53 54 55 56	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	" " " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0 " " " " " " "	V " " " " " " "
	$V_{IN(on)}$		57 58 59 60 61 62 63 64	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	" " " " " " " "		250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		" " " " " " " "	" " " " " " " "

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD 883 method	Test no.	PIN number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$V_{IN(on)}$		65 66 67 68 69 70 71 72	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	0 V		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	I_R		73 74 75 76 77 78 79 80										50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0	µA
	V_F		81 82 83 84 85 86 87 88										0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	h_{FE}	3003	89 90 91 92 93 94 95 96	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	IB_8			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7 IB_8-OUT_8	1000		
2 T_A = +125°C	I_{CEX}		97 98 99 100 101 102 103 104											50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0	µA
1	$V_{CE(sat)}$	3007	105 106 107 108 109 110 111 112	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.0	V
	$V_{CE(sat)}$	3007	113 114 115 116 117 118 119 120	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.5	V
	$V_{CE(sat)}$	3007	121 122 123 124 125 126 127 128	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	V

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I-A. Group A inspection for device type 03 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation: 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	Measured terminal	Limits: Min	Limits: Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 TA = +125°C	$I_{I(Ion)}$		129	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	0 V									50 V	IN_1	650	1350	µA
			130																			IN_2			
			131																			IN_3			
			132																			IN_4			
			133																			IN_5			
			134																			IN_6			
			135																			IN_7			
			136																			IN_8			
	$I_{I(Ioff)}$		137	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA											OUT_1	500		
			138																			OUT_2			
			139																			OUT_3			
			140																			OUT_4			
			141																			OUT_5			
			142																			OUT_6			
			143																			OUT_7			
			144																			OUT_8			
	$V_{I(Ion)}$		145	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	0 V									200 mA	OUT_1		2.0	V
			146																			OUT_2			
			147																			OUT_3			
			148																			OUT_4			
			149																			OUT_5			
			150																			OUT_6			
			151																			OUT_7			
			152																			OUT_8			
	$V_{I(Ion)}$		153	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V	2.2 V										250 mA	OUT_1			
			154																			OUT_2			
			155																			OUT_3			
			156																			OUT_4			
			157																			OUT_5			
			158																			OUT_6			
			159																			OUT_7			
			160																			OUT_8			
	$V_{I(Ion)}$		161	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V										300 mA	OUT_1			
			162																			OUT_2			
			163																			OUT_3			
			164																			OUT_4			
			165																			OUT_5			
			166																			OUT_6			
			167																			OUT_7			
			168																			OUT_8			
	I_R		169										50 V								0 V	COM		10.0	µA
			170																			COM			
			171																			COM			
			172																			COM			
			173																			COM			
			174																			COM			
			175																			COM			
			176																			COM			
	V_F		177										0 V								150 mA	OUT_1		2.0	V
			178																			OUT_2			
			179																			OUT_3			
			180																			OUT_4			
			181																			OUT_5			
			182																			OUT_6			
			183																			OUT_7			
			184																			OUT_8			
	$I_{F'}$	3003	185	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8										350 mA	OUT_1, OUT_2, OUT_3, OUT_4, OUT_5, OUT_6, OUT_7, OUT_8	1000		
			186																						
			187																						
			188																						
			189																						
			190																						
			191																						
			192																						

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no	Pin number and signal designation: 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	Measured terminal	Limits: Min	Limits: Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = 55°C	I_{CEX}		193									0 V										OUT 1		10.0	µA
			194																			OUT 2			
			195																			OUT 3			
			196																			OUT 4			
			197																			OUT 5			
			198																			OUT 6			
			199																			OUT 7			
			200																			OUT 8			
	$V_{CE(sat)}$	3007	201	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT 1		1.6	V
			202																			OUT 2			
			203																			OUT 3			
			204																			OUT 4			
			205																			OUT 5			
			206																			OUT 6			
			207																			OUT 7			
			208																			OUT 8			
	$V_{CE(sat)}$	3007	209	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT 1		1.5	V
			210																			OUT 2			
			211																			OUT 3			
			212																			OUT 4			
			213																			OUT 5			
			214																			OUT 6			
			215																			OUT 7			
			216																			OUT 8			
	$V_{CE(sat)}$	3007	217	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT 1		1.3	V
			218																			OUT 2			
			219																			OUT 3			
			220																			OUT 4			
			221																			OUT 5			
			222																			OUT 6			
			223																			OUT 7			
			224																			OUT 8			
	$I_{IH(on)}$		225	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V	3.85 V											IN 1	650	1350	µA
			226																			IN 2			
			227																			IN 3			
			228																			IN 4			
			229																			IN 5			
			230																			IN 6			
			231																			IN 7			
			232																			IN 8			
	$I_{IH(off)}$		233	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA			50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT 1		500	µA
			234																			OUT 2			
			235																			OUT 3			
			236																			OUT 4			
			237																			OUT 5			
			238																			OUT 6			
			239																			OUT 7			
			240																			OUT 8			
	$V_{IH(on)}$		241	2.6 V	2.6 V	2.6 V	2.6 V	2.6 V	2.6 V	2.6 V	2.6 V			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT 1		2.0	V
			242																			OUT 2			
			243																			OUT 3			
			244																			OUT 4			
			245																			OUT 5			
			246																			OUT 6			
			247																			OUT 7			
			248																			OUT 8			
	$V_{IH(on)}$		249	2.8 V	2.8 V	2.8 V	2.8 V	2.8 V	2.8 V	2.8 V	2.8 V			250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	250 mA	OUT 1			
			250																			OUT 2			
			251																			OUT 3			
			252																			OUT 4			
			253																			OUT 5			
			254																			OUT 6			
			255																			OUT 7			
			256																			OUT 8			

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$V_{IN(on)}$		257 258 259 260 261 262 263 264	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	0 V " " " " " " "		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0 " " " " " " "	V " " " " " " "
	I_R		265 266 267 268 269 270 271 272									" " " " " " " "	50 V " " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0 " " " " " " "	μA " " " " " " "
	V_F		273 274 275 276 277 278 279 280									" " " " " " " "	0 V " " " " " " "	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0 " " " " " " "	V " " " " " " "
	h_{FE}	3003	281 282 283 284 285 286 287 288	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	IB_8	" " " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1-OUT_1 IB_2-OUT_2 IB_3-OUT_3 IB_4-OUT_4 IB_5-OUT_5 IB_6-OUT_6 IB_7-OUT_7 IB_8-OUT_8	500 " " " " " " "		
9 T_A = +25°C *	t_{PLH}	3003 Fig 8.	289 290 291 292 293 294 295 296	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	" " " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7 IN_8-OUT_8		750 " " " " " " "	ns " " " " " " "
	t_{PHL}	3003 Fig 8.	297 298 299 300 301 302 303 304	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	" " " " " " " "		OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1-OUT_1 IN_2-OUT_2 IN_3-OUT_3 IN_4-OUT_4 IN_5-OUT_5 IN_6-OUT_6 IN_7-OUT_7 IN_8-OUT_8		300 " " " " " " "	" " " " " " " "

NOTE Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	Measured terminal	Limits Min	Limits Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A, T_C +25°C	I_{CEX}		1 2 3 4 5 6 7 8									0 V		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0	µA
	$V_{CE(sat)}$	3007	9 10 11 12 13 14 15 16	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.6	V
	$V_{CE(sat)}$	3007	17 18 19 20 21 22 23 24	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	
	$V_{CE(sat)}$	3007	25 26 27 28 29 30 31 32	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.1	
	$I_{IN(on)}$		33 34 35 36 37 38 39 40	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V											IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	250	500	µA
	$I_{IN(on)}$		41 42 43 44 45 46 47 48	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V											IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	750	1450	
	$I_{IN(off)}$		49 50 51 52 53 54 55 56	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA			50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	
	$V_{IN(on)}$		57 58 59 60 61 62 63 64	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V			125 mA	125 mA	125 mA	125 mA	125 mA	125 mA	125 mA	125 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III Group A inspection for device type 39 - Continued.

Subgroup	Symbol	MIL-STD 883 method	Test no.	Pin number and signal designation																		Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$V_{IN(on)}$		65	6.0 V								0 V									200 mA	OUT_1		2.0	V
			66		6.0 V							-								200 mA		OUT_2		-	-
			67			6.0 V						-							200 mA			OUT_3		-	-
			68				6.0 V					-						200 mA				OUT_4		-	-
			69					6.0 V				-					200 mA					OUT_5		-	-
			70						6.0 V			-				200 mA						OUT_6		-	-
			71							6.0 V		-			200 mA							OUT_7		-	-
			72								6.0 V	-		200 mA								OUT_8		-	-
	$V_{IN(on)}$		73	7.0 V								-									275 mA	OUT_1		-	-
			74		7.0 V							-								275 mA		OUT_2		-	-
			75			7.0 V						-							275 mA			OUT_3		-	-
			76				7.0 V					-						275 mA				OUT_4		-	-
			77					7.0 V				-					275 mA					OUT_5		-	-
			78						7.0 V			-				275 mA						OUT_6		-	-
			79							7.0 V		-			275 mA							OUT_7		-	-
			80								7.0 V	-		275 mA								OUT_8		-	-
	$V_{IN(on)}$		81	8.0 V								-									350 mA	OUT_1		-	-
			82		8.0 V							-								350 mA		OUT_2		-	-
			83			8.0 V						-							350 mA			OUT_3		-	-
			84				8.0 V					-						350 mA				OUT_4		-	-
			85					8.0 V				-					350 mA					OUT_5		-	-
			86						8.0 V			-				350 mA						OUT_6		-	-
			87							8.0 V		-			350 mA							OUT_7		-	-
			88								8.0 V	-		350 mA								OUT_8		-	-
	I_R		89									-	50 V									COM		10.0	µA
			90									-	-									COM		-	-
			91									-	-						0 V			COM		-	-
			92									-	-					0 V				COM		-	-
			93									-	-				0 V					COM		-	-
			94									-	-			0 V						COM		-	-
			95									-	-		0 V							COM		-	-
			96									-	-	0 V								COM		-	-
	V_F		97									-	0 V									OUT_1		2.0	V
			98									-	-									OUT_2		-	-
			99									-	-						350 mA			OUT_3		-	-
			100									-	-					350 mA				OUT_4		-	-
			101									-	-				350 mA					OUT_5		-	-
			102									-	-			350 mA						OUT_6		-	-
			103									-	-		350 mA							OUT_7		-	-
			104									-	-	350 mA								OUT_8		-	-
	V_E	3003	105	IB_1								-									350 mA	IB_1-OUT_1	1000		
			106		IB_2							-								350 mA		IB_2-OUT_2	-		
			107			IB_3						-							350 mA			IB_3-OUT_3	-		
			108				IB_4					-						350 mA				IB_4-OUT_4	-		
			109					IB_5				-					350 mA					IB_5-OUT_5	-		
			110						IB_6			-				350 mA						IB_6-OUT_6	-		
			111							IB_7		-			350 mA							IB_7-OUT_7	-		
			112								IB_8	-		350 mA								IB_8-OUT_8	-		
2 T_A = +125°C	I_{CEX}		113									-										OUT_1		10.0	µA
			114									-										OUT_2		-	-
			115									-							50 V			OUT_3		-	-
			116									-						50 V				OUT_4		-	-
			117									-					50 V					OUT_5		-	-
			118									-				50 V						OUT_6		-	-
			119									-			50 V							OUT_7		-	-
			120									-		50 V								OUT_8		-	-
	$V_{CE(sat)}$	3007	121	500 µA								-									350 mA	OUT_1		1.8	V
			122		500 µA							-								350 mA		OUT_2		-	-
			123			500 µA						-							350 mA			OUT_3		-	-
			124				500 µA					-						350 mA				OUT_4		-	-
			125					500 µA				-					350 mA					OUT_5		-	-
			126						500 µA			-				350 mA						OUT_6		-	-
			127							500 µA		-			350 mA							OUT_7		-	-
			128								500 µA	-		350 mA								OUT_8		-	-

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD 883 method	Test no.	Pin number and signal designation																	Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{CE(sat)}$	3007	129 130 131 132 133 134 135 136	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	0 V		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.5	V
	$V_{CE(sat)}$	3007	137 138 139 140 141 142 143 144	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA	250 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	
	$I_{IN(on)}$		145 146 147 148 149 150 151 152	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V											IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	250	500	µA
	$I_{IN(on)}$		153 154 155 156 157 158 159 160	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V											IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	750	1450	
	$I_{IN(off)}$		161 162 163 164 165 166 167 168	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA	25 µA			50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	
	$V_{IN(on)}$		169 170 171 172 173 174 175 176	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V			125 mA	125 mA	125 mA	125 mA	125 mA	125 mA	125 mA	125 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	$V_{IN(on)}$		177 178 179 180 181 182 183 184	6.0 V	6.0 V	6.0 V	6.0 V	6.0 V	6.0 V	6.0 V	6.0 V			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8			
	$V_{IN(on)}$		185 186 187 188 189 190 191 192	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V			275 mA	275 mA	275 mA	275 mA	275 mA	275 mA	275 mA	275 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8			

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD 883 method	Test no.	Pin number and signal designation 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	Measured terminal	Limits Min	Limits Max	Unit
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2	$V_{IN(on)}$		193	8.0 V								0 V									350 mA	OUT_1		2.0	V
T_A = +125°C			194		8.0 V							•								350 mA		OUT_2		•	•
			195			8.0 V						•							350 mA			OUT_3		•	•
			196				8.0 V					•						350 mA				OUT_4		•	•
			197					8.0 V				•					350 mA					OUT_5		•	•
			198						8.0 V			•				350 mA						OUT_6		•	•
			199							8.0 V		•			350 mA							OUT_7		•	•
			200								8.0 V	•		350 mA								OUT_8		•	•
	I_R		201									•	50 V									COM		10.0	μA
			202									•	•									COM		•	•
			203									•	•						0 V			COM		•	•
			204									•	•					0 V				COM		•	•
			205									•	•				0 V					COM		•	•
			206									•	•			0 V						COM		•	•
			207									•	•		0 V							COM		•	•
			208									•	•	0 V						0 V	0 V	COM		•	•
	V_F		209									•	0 V								350 mA	OUT_1		2.0	V
			210									•	•							350 mA		OUT_2		•	•
			211									•	•						350 mA			OUT_3		•	•
			212									•	•					350 mA				OUT_4		•	•
			213									•	•				350 mA					OUT_5		•	•
			214									•	•			350 mA						OUT_6		•	•
			215									•	•		350 mA							OUT_7		•	•
			216									•	•	350 mA								OUT_8		•	•
	h_{FE}	3003	217	IB_1								•									350 mA	IB_1 OUT_1	1000		
			218		IB_2							•								350 mA		IB_2 OUT_2			
			219			IB_3						•							350 mA			IB_3 OUT_3			
			220				IB_4					•						350 mA				IB_4 OUT_4			
			221					IB_5				•					350 mA					IB_5 OUT_5			
			222						IB_6			•				350 mA						IB_6 OUT_6			
			223							IB_7		•			350 mA							IB_7 OUT_7			
			224								IB_8	•		350 mA								IB_8 OUT_8			
3	I_{CEX}		225									•									50 V	OUT_1		10.0	μA
T_A = +55°C			226									•								50 V		OUT_2		•	•
			227									•							50 V			OUT_3		•	•
			228									•						50 V				OUT_4		•	•
			229									•					50 V					OUT_5		•	•
			230									•				50 V						OUT_6		•	•
			231									•			50 V							OUT_7		•	•
			232									•		50 V								OUT_8		•	•
	$V_{CE(sat)}$	3007	233	850 μA								•									350 mA	OUT_1		1.8	V
			234		850 μA							•								350 mA		OUT_2		•	•
			235			850 μA						•							350 mA			OUT_3		•	•
			236				850 μA					•						350 mA				OUT_4		•	•
			237					850 μA				•					350 mA					OUT_5		•	•
			238						850 μA			•				350 mA						OUT_6		•	•
			239							850 μA		•			350 mA							OUT_7		•	•
			240								850 μA	•		350 mA								OUT_8		•	•
	$V_{CE(sat)}$	3007	241	550 μA								•									200 mA	OUT_1		1.5	V
			242		550 μA							•								200 mA		OUT_2		•	•
			243			550 μA						•							200 mA			OUT_3		•	•
			244				550 μA					•						200 mA				OUT_4		•	•
			245					550 μA				•					200 mA					OUT_5		•	•
			246						550 μA			•				200 mA						OUT_6		•	•
			247							550 μA		•			200 mA							OUT_7		•	•
			248								550 μA	•		200 mA								OUT_8		•	•
	$V_{CE(sat)}$	3007	249	350 μA								•									100 mA	OUT_1		1.3	V
			250		350 μA							•								100 mA		OUT_2		•	•
			251			350 μA						•							100 mA			OUT_3		•	•
			252				350 μA					•						100 mA				OUT_4		•	•
			253					350 μA				•					100 mA					OUT_5		•	•
			254						350 μA			•				100 mA						OUT_6		•	•
			255							350 μA		•			100 mA							OUT_7		•	•
			256								350 μA	•		100 mA								OUT_8		•	•

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																		Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 $T_A = T_C$ 55°C	$I_{IN(on)}$		257	5.0 V								0 V										IN_1	250	500	µA
			258		5.0 V							"										IN_2	"	"	"
			259			5.0 V						"										IN_3	"	"	"
			260				5.0 V					"										IN_4	"	"	"
			261					5.0 V				"										IN_5	"	"	"
			262						5.0 V			"										IN_6	"	"	"
			263							5.0 V		"										IN_7	"	"	"
			264								5.0 V	"										IN_8	"	"	"
	$I_{IN(on)}$		265	12 V																		IN_1	750	1450	"
			266		12 V																	IN_2	"	"	"
			267			12 V																IN_3	"	"	"
			268				12 V															IN_4	"	"	"
			269					12 V														IN_5	"	"	"
			270						12 V													IN_6	"	"	"
			271							12 V												IN_7	"	"	"
			272								12 V											IN_8	"	"	"
	$I_{IN(off)}$		273	25 µA																	50 V	OUT_1		500	"
			274		25 µA															50 V		OUT_2	"	"	"
			275			25 µA													50 V			OUT_3	"	"	"
			276				25 µA											50 V				OUT_4	"	"	"
			277					25 µA									50 V					OUT_5	"	"	"
			278						25 µA							50 V						OUT_6	"	"	"
			279							25 µA					50 V							OUT_7	"	"	"
			280								25 µA			50 V								OUT_8	"	"	"
	$V_{IN(on)}$		281	6.0 V																	125 mA	OUT_1		2.0	V
			282		6.0 V															125 mA		OUT_2	"	"	"
			283			6.0 V													125 mA			OUT_3	"	"	"
			284				6.0 V											125 mA				OUT_4	"	"	"
			285					6.0 V									125 mA					OUT_5	"	"	"
			286						6.0 V							125 mA						OUT_6	"	"	"
			287							6.0 V					125 mA							OUT_7	"	"	"
			288								6.0 V			125 mA								OUT_8	"	"	"
	$V_{IN(on)}$		289	8.0 V																	200 mA	OUT_1			
			290		8.0 V															200 mA		OUT_2			
			291			8.0 V													200 mA			OUT_3			
			292				8.0 V											200 mA				OUT_4			
			293					8.0 V									200 mA					OUT_5			
			294						8.0 V							200 mA						OUT_6			
			295							8.0 V					200 mA							OUT_7			
			296								8.0 V			200 mA								OUT_8			
	$V_{IN(on)}$		297	10.0 V																	275 mA	OUT_1			
			298		10.0 V															275 mA		OUT_2			
			299			10.0 V													275 mA			OUT_3			
			300				10.0 V											275 mA				OUT_4			
			301					10.0 V									275 mA					OUT_5			
			302						10.0 V							275 mA						OUT_6			
			303							10.0 V					275 mA							OUT_7			
			304								10.0 V			275 mA								OUT_8			
	$V_{IN(on)}$		305	12.0 V																	350 mA	OUT_1			
			306		12.0 V															350 mA		OUT_2			
			307			12.0 V													350 mA			OUT_3			
			308				12.0 V											350 mA				OUT_4			
			309					12.0 V									350 mA					OUT_5			
			310						12.0 V							350 mA						OUT_6			
			311							12.0 V					350 mA							OUT_7			
			312								12.0 V			350 mA								OUT_8			

MIL-M-38510/41A

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = 125°C	I_R		313									0 V	50 V								0 V	COM		10.0	µA
			314										"							0 V		COM		"	"
			315										"						0 V			COM		"	"
			316										"					0 V				COM		"	"
			317										"				0 V					COM		"	"
			318										"			0 V						COM		"	"
			319										"		0 V							COM		"	"
			320										"	0 V								COM		"	"
	V_F		321										0 V								350 mA	OUT_1		2.0	V
			322										"							350 mA		OUT_2		"	"
			323										"						350 mA			OUT_3		"	"
			324										"					350 mA				OUT_4		"	"
			325										"				350 mA					OUT_5		"	"
			326										"			350 mA						OUT_6		"	"
			327										"		350 mA							OUT_7		"	"
			328										"	350 mA								OUT_8		"	"
	h_{FE}	3003	329	IB_1																	350 mA	IB_1-OUT_1	500		
			330		IB_2															350 mA		IB_2-OUT_2	"		
			331			IB_3													350 mA			IB_3-OUT_3	"		
			332				IB_4											350 mA				IB_4-OUT_4	"		
			333					IB_5									350 mA					IB_5-OUT_5	"		
			334						IB_6							350 mA						IB_6-OUT_6	"		
			335							IB_7					350 mA							IB_7-OUT_7	"		
			336								IB_8			350 mA								IB_8-OUT_8	"		
9 T_A = 25°C	t_{PLH}	3003 Fig 8.	337	IN_1																	OUT	IN_1-OUT_1		750	ns
			338		IN_2															OUT		IN_2-OUT_2	"		
			339			IN_3													OUT			IN_3-OUT_3	"		
			340				IN_4											OUT				IN_4-OUT_4	"		
			341					IN_5									OUT					IN_5-OUT_5	"		
			342						IN_6							OUT						IN_6-OUT_6	"		
			343							IN_7					OUT							IN_7-OUT_7	"		
			344								IN_8			OUT								IN_8-OUT_8	"		
	t_{PHL}	3003 Fig 8.	345	IN_1																	OUT	IN_1-OUT_1		300	"
			346		IN_2															OUT		IN_2-OUT_2	"		
			347			IN_3													OUT			IN_3-OUT_3	"		
			348				IN_4											OUT				IN_4-OUT_4	"		
			349					IN_5									OUT					IN_5-OUT_5	"		
			350						IN_6							OUT						IN_6-OUT_6	"		
			351							IN_7					OUT							IN_7-OUT_7	"		
			352								IN_8			OUT								IN_8-OUT_8	"		

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																	Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1 2 3 4 5 6 7 8									0 V " " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0	μA
	$V_{CE(sat)}$	3007	9 10 11 12 13 14 15 16	500 μA	500 μA	500 μA	500 μA	500 μA	500 μA	500 μA	500 μA	" " " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.6	V
	$V_{CE(sat)}$	3007	17 18 19 20 21 22 23 24	350 μA	350 μA	350 μA	350 μA	350 μA	350 μA	350 μA	350 μA	" " " " " " " "		200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	"
	$V_{CE(sat)}$	3007	25 26 27 28 29 30 31 32	250 μA	250 μA	250 μA	250 μA	250 μA	250 μA	250 μA	250 μA	" " " " " " " "		100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.1	"
	$I_{IN(on)}$		33 34 35 36 37 38 39 40	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	" " " " " " " "										IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	1180	2400	μA
	$I_{IN(off)}$		41 42 43 44 45 46 47 48	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	" " " " " " " "		50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	"
	$I_{IN(on)}$		49 50 51 52 53 54 55 56	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	" " " " " " " "		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	"
	I_R		57 58 59 60 61 62 63 64									" " " " " " " "	50 V " " " " " " "	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0	"

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 30 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																	Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	V_F		65									0 V	0 V								350 mA	OUT_1		2.0	V
			66																	350 mA		OUT_2			
			67																350 mA			OUT_3			
			68															350 mA				OUT_4			
			69														350 mA					OUT_5			
			70													350 mA						OUT_6			
			71												350 mA							OUT_7			
			72											350 mA								OUT_8			
	h_{FE}	3003	73	IB_1																350 mA	350 mA	IB_1 OUT_1	1000		
			74		IB_2																	IB_2 OUT_2			
			75			IB_3													350 mA			IB_3 OUT_3			
			76				IB_4											350 mA				IB_4 OUT_4			
			77					IB_5									350 mA					IB_5 OUT_5			
			78						IB_6							350 mA						IB_6 OUT_6			
			79							IB_7					350 mA							IB_7 OUT_7			
			80								IB_8			350 mA								IB_8 OUT_8			
2 T_A = +125°C	I_{CEX}		81																		50 V	OUT_1		10.0	μA
			82																	50 V		OUT_2			
			83																50 V			OUT_3			
			84															50 V				OUT_4			
			85														50 V					OUT_5			
			86													50 V						OUT_6			
			87												50 V							OUT_7			
			88											50 V								OUT_8			
	$V_{CE(sat)}$	3007	89	500 μA																	350 mA	OUT_1		1.8	V
			90		500 μA															350 mA		OUT_2			
			91			500 μA													350 mA			OUT_3			
			92				500 μA											350 mA				OUT_4			
			93					500 μA									350 mA					OUT_5			
			94						500 μA							350 mA						OUT_6			
			95							500 μA					350 mA							OUT_7			
			96								500 μA			350 mA								OUT_8			
	$V_{CE(sat)}$	3007	97	350 μA																200 mA	200 mA	OUT_1		1.5	
			98		350 μA														200 mA			OUT_2			
			99			350 μA												200 mA				OUT_3			
			100				350 μA										200 mA					OUT_4			
			101					350 μA								200 mA						OUT_5			
			102						350 μA						200 mA							OUT_6			
			103							350 μA				200 mA								OUT_7			
			104								350 μA											OUT_8			
	$V_{CE(sat)}$	3007	105	250 μA																100 mA	100 mA	OUT_1		1.3	
			106		250 μA														100 mA			OUT_2			
			107			250 μA												100 mA				OUT_3			
			108				250 μA										100 mA					OUT_4			
			109					250 μA								100 mA						OUT_5			
			110						250 μA						100 mA							OUT_6			
			111							250 μA				100 mA								OUT_7			
			112								250 μA			100 mA								OUT_8			
	$I_{IN(on)}$		113	3.0 V																		IN_1	1180	2400	μA
			114		3.0 V																	IN_2			
			115			3.0 V																IN_3			
			116				3.0 V															IN_4			
			117					3.0 V														IN_5			
			118						3.0 V													IN_6			
			119							3.0 V												IN_7			
			120								3.0 V											IN_8			
	$I_{IN(off)}$		121	25 μA																	50 V	OUT_1		500	
			122		25 μA															50 V		OUT_2			
			123			25 μA													50 V			OUT_3			
			124				25 μA											50 V				OUT_4			
			125					25 μA									50 V					OUT_5			
			126						25 μA							50 V						OUT_6			
			127							25 μA					50 V							OUT_7			
			128								25 μA			50 V								OUT_8			

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE II. Group A inspection for device type 10 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{IN(on)}$		129 130 131 132 133 134 135 136	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	2.4 V	0 V		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	I_R		137 138 139 140 141 142 143 144										50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0	µA
	V_F		145 146 147 148 149 150 151 152										0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	h_{FE}	3003	153 154 155 156 157 158 159 160	I_{B_1}	I_{B_2}	I_{B_3}	I_{B_4}	I_{B_5}	I_{B_6}	I_{B_7}	I_{B_8}			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	I_{B_1} OUT_1 I_{B_2} OUT_2 I_{B_3} OUT_3 I_{B_4} OUT_4 I_{B_5} OUT_5 I_{B_6} OUT_6 I_{B_7} OUT_7 I_{B_8} OUT_8	1000		
3 T_A = -55°C	I_{CEX}		161 162 163 164 165 166 167 168											50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		10.0	µA
	$V_{CE(sat)}$	3007	169 170 171 172 173 174 175 176	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA	850 µA			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.8	V
	$V_{CE(sat)}$	3007	177 178 179 180 181 182 183 184	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA	550 µA			200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.5	V
	$V_{CE(sat)}$	3007	185 186 187 188 189 190 191 192	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA	350 µA			100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	100 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		1.3	V

MIL-M-38510/41A

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Subgroup	Symbol	MIL-STD 883 method	Test no.	Pin number and signal designation																		Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = 125°C	$I_{IN(on)}$		193 194 195 196 197 198 199 200	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	0 V										IN_1 IN_2 IN_3 IN_4 IN_5 IN_6 IN_7 IN_8	1180	2400	μA
	$I_{IN(off)}$		201 202 203 204 205 206 207 208	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA	25 μA			50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		500	
	$V_{IN(on)}$		209 210 211 212 213 214 215 216	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	I_R		217 218 219 220 221 222 223 224										50 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	0 V	COM COM COM COM COM COM COM COM		10.0	μA
	V_F		225 226 227 228 229 230 231 232										0 V	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	OUT_1 OUT_2 OUT_3 OUT_4 OUT_5 OUT_6 OUT_7 OUT_8		2.0	V
	h_{FE}	3003	233 234 235 236 237 238 239 240	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	IB_8			350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_1 OUT_1 IB_2 OUT_2 IB_3 OUT_3 IB_4 OUT_4 IB_5 OUT_5 IB_6 OUT_6 IB_7 OUT_7 IB_8 OUT_8	500		
9 T_A = 25°C	t_{PLH}	3003 Fig 8.	241 242 243 244 245 246 247 248	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8			OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1 OUT_1 IN_2 OUT_2 IN_3 OUT_3 IN_4 OUT_4 IN_5 OUT_5 IN_6 OUT_6 IN_7 OUT_7 IN_8 OUT_8		750	ns
	t_{PHL}	3003 Fig 8.	249 250 251 252 253 254 255 256	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8			OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_1 OUT_1 IN_2 OUT_2 IN_3 OUT_3 IN_4 OUT_4 IN_5 OUT_5 IN_6 OUT_6 IN_7 OUT_7 IN_8 OUT_8		300	

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:35Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test for class B devices (method 1005 of MIL-STD-883). Test condition B using the circuit shown on figure 4, test condition A using the circuit shown on figure 5 or test condition F using the circuit shown on figure 6.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Method of inspection shall be as specified in the appropriate tables and as follows:

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal of the device under test (DUT). Currents given are conventional current and positive when flowing into the referenced terminal.

4.5.2 Life test and burn-in cooldown procedure. When devices are measured at +25°C following application of the steady-state life or burn-in test condition, they shall be cooled within 10°C of their power stable condition at room temperature prior to removal of the bias.

TABLE IV. Group C end-point electrical parameters T_A = +25°C.

Test	Limit		Delta		Unit
	Min	Max	Min	Max	
I_{CEX}	--	10.0	-0.5	+0.5	µA
h_{FE}	1000	--	-25%	25%	--

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

6.2 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to the acquiring activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action and reporting of results, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

f. Requirements for product assurance options.

g. Requirements for special lead lengths, or lead forming, if applicable. These requirements shall not affect the part number.

h. Requirements for "JAN" marking.

6.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND	Ground zero voltage potential
I_{CEX}	Collector cutoff current
V_{IN}	Voltage level at an input terminal
V_F	Forward voltage drop
V_{CE}	Collector-emitter saturation voltage
I_{IN}	Current flowing into an input terminal
I_R	Clamp diode leakage current
V_F	Clamp diode forward voltage

6.4 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.5 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	2001
02	2002
03	2003
04	2004
05	2005
06	2801
07	2802
08	2803
09	2804
10	2805

Custodians:
Army - ER
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - MI, AR
Navy - OS, SH
Air Force - 11, 19, 80, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-1055)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

Rome Air Development Center
Griffiss AFB, NY 13441

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/141A	MIRCIRCUITS, DARLINGTON TRANSISTOR ARRAY, SEVEN AND EIGHT GATE, MONOLITHIC SILICON

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil - Downloaded: 20260124T13:35Z
Check the source to verify that this is the current version before use.