INCH-POUND
MIL-M-38510/141B
12 July 2004
SUPERSEDING
MIL-M-38510/141A
04 May 1988

MILITARY SPECIFICATION

MICROCIRCUITS, LINEAR, DARLINGTON TRANSISTOR ARRAY, SEVEN AND EIGHT GATE, MONOLITHIC SILICON

Reactivated after July 12, 2004 and may be used for either new or existing design acquisition.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and MIL-PRF-38535.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, seven and eight gate, Darlington transistor array microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete part number. For this product, the requirements of MIL-M-38510 have been superseded by MIL-PRF-38535, (see 6.3)

1.2 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-38535, and as specified herein.

1.2 Part number. The part number should be in accordance with MIL-PRF-38535, and as specified herein.

1.2.1 Device types. The device types are as follows:

Device types	Circuit
01, 02, 03, 04, 05	Darlington transistor array, seven gate
06, 07, 08, 09, 10	Darlington transistor array, eight gate

1.2.2 Device class. The device class is the product assurance level as defined in MIL-PRF-38535.

1.2.3 Case outline. The case outlines are as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	Terminals	Package style
E	GDIP1-T16 or CDIP2-T16	16	Dual in line
V	GDIP1-T18 or CDIP2-T18	18	Dual in line

Comments, suggestions, or questions on this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAS, 3990 East Broad St., Columbus, OH 43216-5000, or email linear@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

1.3 Absolute maximum ratings.

Output voltage (V_{CE}) ..... 50 V dc
Input voltage (V_{IN})
Device types 02, 03, 04, 07, 08, 09 ..... 30 V dc
Device types 05, 10 ..... 15 V dc
Peak collector current (I_C) ..... 500 mA
Peak input current (I_{IN}) ..... 25 mA
Power dissipation (P_D) ..... 1.0 W 1/
Storage temperature range ..... -65°C to +150°C
Junction temperature (T_J) ..... +175°C

1.4 Recommended operating conditions.

Ambient operating temperature range (T_A) ..... -55°C to +125°C

1.5 Power and thermal characteristics.

Package	Case outline	Maximum allowable power dissipation	Maximum θ_{JC}	Maximum θ_{JA}
16 lead dual in line	E	277 mW at T_A = +125°C	20°C/W	90°C/W
18 lead dual in line	V	330 mW at T_A = +125°C	20°C/W	75°C/W

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-38535 - Integrated Circuits (Microcircuits) Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard for Microelectronics.
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or www.dodssp.daps.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein the text of this document shall takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

1/ Absolute maximum rating for power dissipation is for one Darlington pair only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. Microcircuits furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.3 and 6.4).

3.2 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein.

3.3.1 Terminal connections and logic diagram. The terminal connections and logic diagram shall be as specified on figure 1.

3.3.2 Truth table and logic equations. The truth table and logic equations shall be as specified on figure 2.

3.3.3 Schematic circuits. The schematic circuits shall be maintained by the manufacturer and made available to the qualifying activity and the preparing activity upon request.

3.3.4 Case outlines. The case outlines shall be as specified in 1.2.3.

3.3.5 Package and sealing material. Package and sealing material shall be in accordance with MIL-PRF-38535.

3.4 Lead material and finish. The lead material and finish shall be in accordance with MIL-PRF-38535 (see 6.6).

3.5 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended ambient operating temperature range, unless otherwise specified.

3.6 Electrical test requirements. Electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.7 Marking. Marking shall be in accordance with MIL-PRF-38535.

3.7.1 Serialization. All class S devices shall be serialized in accordance with MIL-PRF-38535.

3.7.2 Correctness of indexing and markings. All devices shall be subjected to the final electrical tests specified in table II after part marking to verify that they are correctly indexed and identified by part number. Optionally, an approved electrical test may be devised especially for this requirement.

3.8 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 53 (see MIL-PRF-38535, appendix A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55°C \le T_A \le +125°C$ unless otherwise specified	Device type	Limits		Units
				Min	Max	
Output leakage current	I_{CEX}	V_{CE} = 50 V	01, 06		10.0	µA
Collector emitter saturation voltage	$V_{CE(sat)}$	I_C = 350 mA, I_B = 850 µA, T_A = -55°C	01, 06		1.8	V
		I_C = 200 mA, I_B = 550 µA, T_A = -55°C			1.5	
		I_C = 100 mA, I_B = 350 µA, T_A = -55°C			1.3	
		I_C = 350 mA, I_B = 500 µA, T_A = +25°C			1.6	
		I_C = 200 mA, I_B = 350 µA, T_A = +25°C			1.3	
		I_C = 100 mA, I_B = 250 µA, T_A = +25°C			1.1	
		I_C = 350 mA, I_B = 500 µA, T_A = +125°C			1.8	
		I_C = 200 mA, I_B = 350 µA, T_A = +125°C			1.5	
		I_C = 100 mA, I_B = 250 µA, T_A = +125°C			1.3	
Input current	$I_{IN(off)}$	$I_B \le 25$ µA	01, 06		500	µA
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, T_A = -55°C	01, 06	500		
		V_{CE} = 2 V, I_C = 350 mA, $+25°C \le T_A \le +125°C$		1000		
Clamp diode leakage current	I_R	V_R = 50 V	01, 06		10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA	01, 06		2.0	V
Turn on delay	t_{PLH}	T_A = +25°C, see figure 4	01, 06		750	ns
Turn off delay	t_{PHL}	T_A = +25°C, see figure 4	01, 06		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions $-55°C \le T_A \le +125°C$ unless otherwise specified	Device type	Limits		Units
				Min	Max	
Output leakage current	I_{CEX}	V_{CE} = 50 V, V_{IN} = 6 V	02, 07		10.0	µA
Collector emitter saturation voltage	$V_{CE(sat)}$	I_C = 350 mA, I_B = 850 µA, T_A = -55°C	02, 07		1.8	V
		I_C = 200 mA, I_B = 550 µA, T_A = -55°C			1.5	
		I_C = 100 mA, I_B = 350 µA, T_A = -55°C			1.3	
		I_C = 350 mA, I_B = 500 µA, T_A = +25°C			1.6	
		I_C = 200 mA, I_B = 350 µA, T_A = +25°C			1.3	
		I_C = 100 mA, I_B = 250 µA, T_A = +25°C			1.1	
		I_C = 350 mA, I_B = 500 µA, T_A = +125°C			1.8	
		I_C = 200 mA, I_B = 350 µA, T_A = +125°C			1.5	
		I_C = 100 mA, I_B = 250 µA, T_A = +125°C			1.3	
Input current	$I_{IN(on)}$	V_{IN} = 17 V	02, 07	575	1300	µA
Input current	$I_{IN(off)}$	$I_B \le 25$ µA	02, 07		500	µA
Input voltage	$V_{IN(on)}$	$V_{CE} \le 2$ V, I_C = 300 mA, T_A = -55°C	02, 07	18		V
		$V_{CE} \le 2$ V, I_C = 300 mA, $+25°C \le T_A \le +125°C$		13		
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, T_A = -55°C	02, 07	500		
		V_{CE} = 2 V, I_C = 350 mA, $+25°C \le T_A \le +125°C$		1000		
Clamp diode leakage current	I_R	V_R = 50 V	02, 07		10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA	02, 07		2.0	V
Turn on delay	t_{PLH}	T_A = +25°C, see figure 4	02, 07		750	ns
Turn off delay	t_{PHL}	T_A = +25°C, see figure 4	02, 07		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions $-55°C \le T_A \le +125°C$ unless otherwise specified	Device type	Limits		Units
				Min	Max	
Output leakage current	I_{CEX}	V_{CE} = 50 V	03, 08		10.0	µA
Collector emitter saturation voltage	$V_{CE(sat)}$	I_C = 350 mA, I_B = 850 µA, T_A = -55°C	03, 08		1.8	V
		I_C = 200 mA, I_B = 550 µA, T_A = -55°C			1.5	
		I_C = 100 mA, I_B = 350 µA, T_A = -55°C			1.3	
		I_C = 350 mA, I_B = 500 µA, T_A = +25°C			1.6	
		I_C = 200 mA, I_B = 350 µA, T_A = +25°C			1.3	
		I_C = 100 mA, I_B = 250 µA, T_A = +25°C			1.1	
		I_C = 350 mA, I_B = 500 µA, T_A = +125°C			1.8	
		I_C = 200 mA, I_B = 350 µA, T_A = +125°C			1.5	
		I_C = 100 mA, I_B = 250 µA, T_A = +125°C			1.3	
Input current	$I_{IN(on)}$	V_{IN} = 3.85 V	03, 07	650	1350	µA
Input current	$I_{IN(off)}$	$I_B \le 25$ µA	03, 08		500	µA
Input voltage	$V_{IN(on)}$	$V_{CE} \le 2$ V, I_C = 200 mA, T_A = -55°C	03, 08	2.6		V
		$V_{CE} \le 2$ V, I_C = 250 mA, T_A = -55°C		2.8		
		$V_{CE} \le 2$ V, I_C = 300 mA, T_A = -55°C		3.0		
		$V_{CE} \le 2$ V, I_C = 200 mA, $+25°C \le T_A \le +125°C$		2.0		
		$V_{CE} \le 2$ V, I_C = 250 mA, $+25°C \le T_A \le +125°C$		2.2		
		$V_{CE} \le 2$ V, I_C = 300 mA, $+25°C \le T_A \le +125°C$		2.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions $-55°C \le T_A \le +125°C$ unless otherwise specified	Device type	Limits		Units
				Min	Max	
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, T_A = -55°C	03, 08	500		
		V_{CE} = 2 V, I_C = 350 mA, $+25°C \le T_A \le +125°C$		1000		
Clamp diode leakage current	I_R	V_R = 50 V	03, 08		10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA	03, 08		2.0	V
Turn on delay	t_{PLH}	T_A = +25°C, see figure 4	03, 08		750	ns
Turn off delay	t_{PHL}	T_A = +25°C, see figure 4	03, 08		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions $-55°C \le T_A \le +125°C$ unless otherwise specified	Device type	Limits		Units
				Min	Max	
Output leakage current	I_{CEX}	V_{CE} = 50 V	04, 09		10.0	µA
Collector emitter saturation voltage	$V_{CE(sat)}$	I_C = 350 mA, I_B = 850 µA, T_A = -55°C	04, 09		1.8	V
		I_C = 200 mA, I_B = 550 µA, T_A = -55°C			1.5	
		I_C = 100 mA, I_B = 350 µA, T_A = -55°C			1.3	
		I_C = 350 mA, I_B = 500 µA, T_A = +25°C			1.6	
		I_C = 200 mA, I_B = 350 µA, T_A = +25°C			1.3	
		I_C = 100 mA, I_B = 250 µA, T_A = +25°C			1.1	
		I_C = 350 mA, I_B = 500 µA, T_A = +125°C			1.8	
		I_C = 200 mA, I_B = 350 µA, T_A = +125°C			1.5	
		I_C = 100 mA, I_B = 250 µA, T_A = +125°C			1.3	
Input current	$I_{IN(on)}$	V_{IN} = 5 V	04, 09	250	500	µA
		V_{IN} = 12 V		750	1450	
Input current	$I_{IN(off)}$	$I_B \le 25$ µA	04, 09		500	µA
Input voltage	$V_{IN(on)}$	$V_{CE} \le 2$ V, I_C = 125 mA, T_A = -55°C	04, 09	6.0		V
		$V_{CE} \le 2$ V, I_C = 200 mA, T_A = -55°C		8.0		
		$V_{CE} \le 2$ V, I_C = 275 mA, T_A = -55°C		10.0		
		$V_{CE} \le 2$ V, I_C = 350 mA, T_A = -55°C		12.0		
		$V_{CE} \le 2$ V, I_C = 125 mA, $+25°C \le T_A \le +125°C$		5.0		
		$V_{CE} \le 2$ V, I_C = 200 mA, $+25°C \le T_A \le +125°C$		6.0		
		$V_{CE} \le 2$ V, I_C = 275 mA, $+25°C \le T_A \le +125°C$		7.0		
		$V_{CE} \le 2$ V, I_C = 350 mA, $+25°C \le T_A \le +125°C$		8.0		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions $-55°C \le T_A \le +125°C$ unless otherwise specified	Device type	Limits		Units
				Min	Max	
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, T_A = -55°C	04, 09	500		
		V_{CE} = 2 V, I_C = 350 mA, $+25°C \le T_A \le +125°C$		1000		
Clamp diode leakage current	I_R	V_R = 50 V	04, 09		10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA	04, 09		2.0	V
Turn on delay	t_{PLH}	T_A = +25°C, see figure 4	04, 09		750	ns
Turn off delay	t_{PHL}	T_A = +25°C, see figure 4	04, 09		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions $-55°C \le T_A \le +125°C$ unless otherwise specified	Device type	Limits		Units
				Min	Max	
Output leakage current	I_{CEX}	V_{CE} = 50 V	05, 10		10.0	µA
Collector emitter saturation voltage	$V_{CE(sat)}$	I_C = 350 mA, I_B = 850 µA, T_A = -55°C	05, 10		1.8	V
		I_C = 200 mA, I_B = 550 µA, T_A = -55°C			1.5	
		I_C = 100 mA, I_B = 350 µA, T_A = -55°C			1.3	
		I_C = 350 mA, I_B = 500 µA, T_A = +25°C			1.6	
		I_C = 200 mA, I_B = 350 µA, T_A = +25°C			1.3	
		I_C = 100 mA, I_B = 250 µA, T_A = +25°C			1.1	
		I_C = 350 mA, I_B = 500 µA, T_A = +125°C			1.8	
		I_C = 200 mA, I_B = 350 µA, T_A = +125°C			1.5	
		I_C = 100 mA, I_B = 250 µA, T_A = +125°C			1.3	
Input current	$I_{IN(on)}$	V_{IN} = 3 V	05, 10	1180	2400	µA
Input current	$I_{IN(off)}$	$I_B \le 25$ µA	05, 10		500	µA
Input voltage	$V_{IN(on)}$	$V_{CE} \le 2$ V, I_C = 350 mA, T_A = -55°C	05, 10	3.0		V
		$V_{CE} \le 2$ V, I_C = 350 mA, $+25°C \le T_A \le +125°C$		2.4		
DC forward current transfer ratio	h_{FE}	V_{CE} = 2 V, I_C = 350 mA, T_A = -55°C	05, 10	500		
		V_{CE} = 2 V, I_C = 350 mA, $+25°C \le T_A \le +125°C$		1000		
Clamp diode leakage current	I_R	V_R = 50 V	05, 10		10.0	µA
Clamp diode forward voltage	V_F	I_F = 350 mA	05, 10		2.0	V
Turn on delay	t_{PLH}	T_A = +25°C, see figure 4	05, 10		750	ns
Turn off delay	t_{PHL}	T_A = +25°C, see figure 4	02, 10		300	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-PRF-38535 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters	1	1
Final electrical test parameters	1*, 2, 3, 9	1*, 2, 3, 9
Group A test requirements	1, 2, 3, 9	1, 2, 3, 9
Group B electrical test parameters when using the method 5005 QCI option	1, 2, 3, and table IV delta limits	N/A
Group C end-point electrical parameters	1, 2, 3, and table IV delta limits	1 and table IV delta limits
Group D end-point electrical parameters	1, 2, 3	1, 2, 3

*PDA applies to subgroup 1.

4. VERIFICATION.

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not effect the form, fit, or function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. The burn-in test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. Additional screening for space level product shall be as specified in MIL-PRF-38535.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-38535.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 01,02,03,04 AND 05

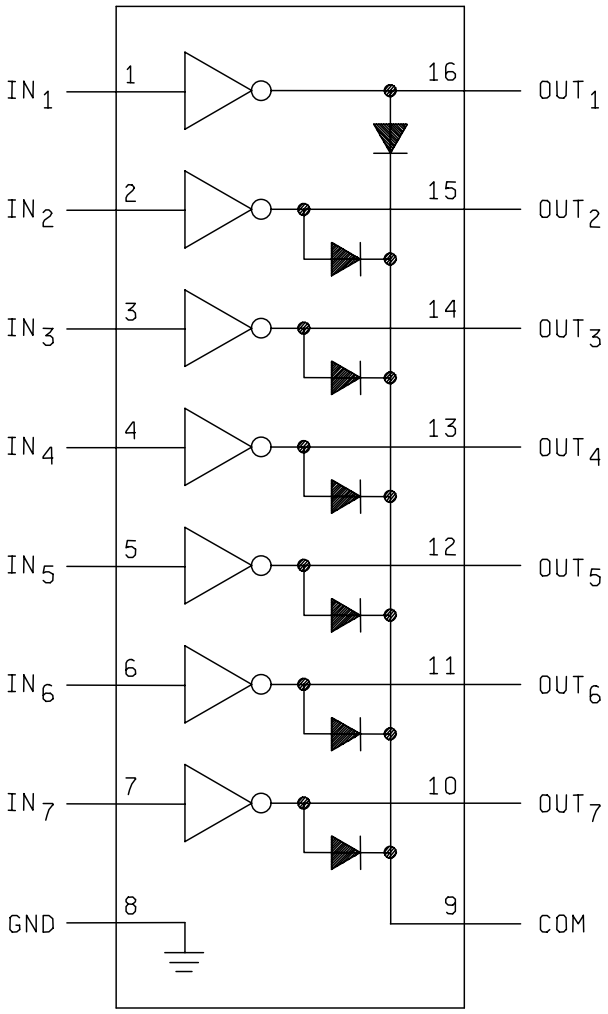


Figure 1. Terminal connections and logic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 06,07,08,09 AND 10

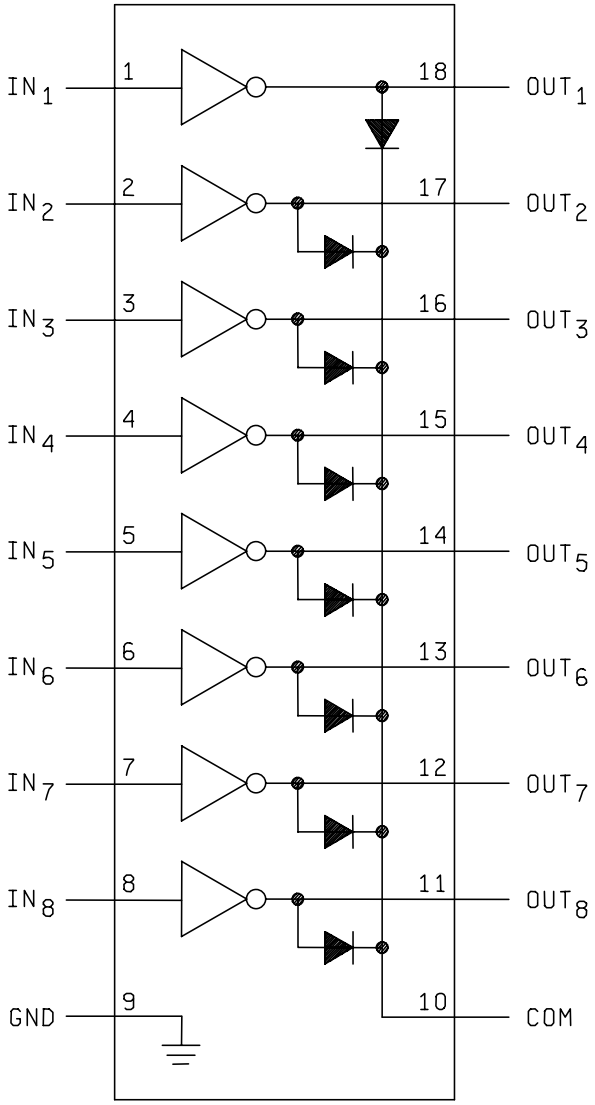


Figure 1. Terminal connections and logic diagram – continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

All device types

Input A	Output Y
0	1
1	0

0 = Logic low level.

1 = Logic high level.

$Y = \overline{A}$.

FIGURE 2. Truth table and logic equation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.


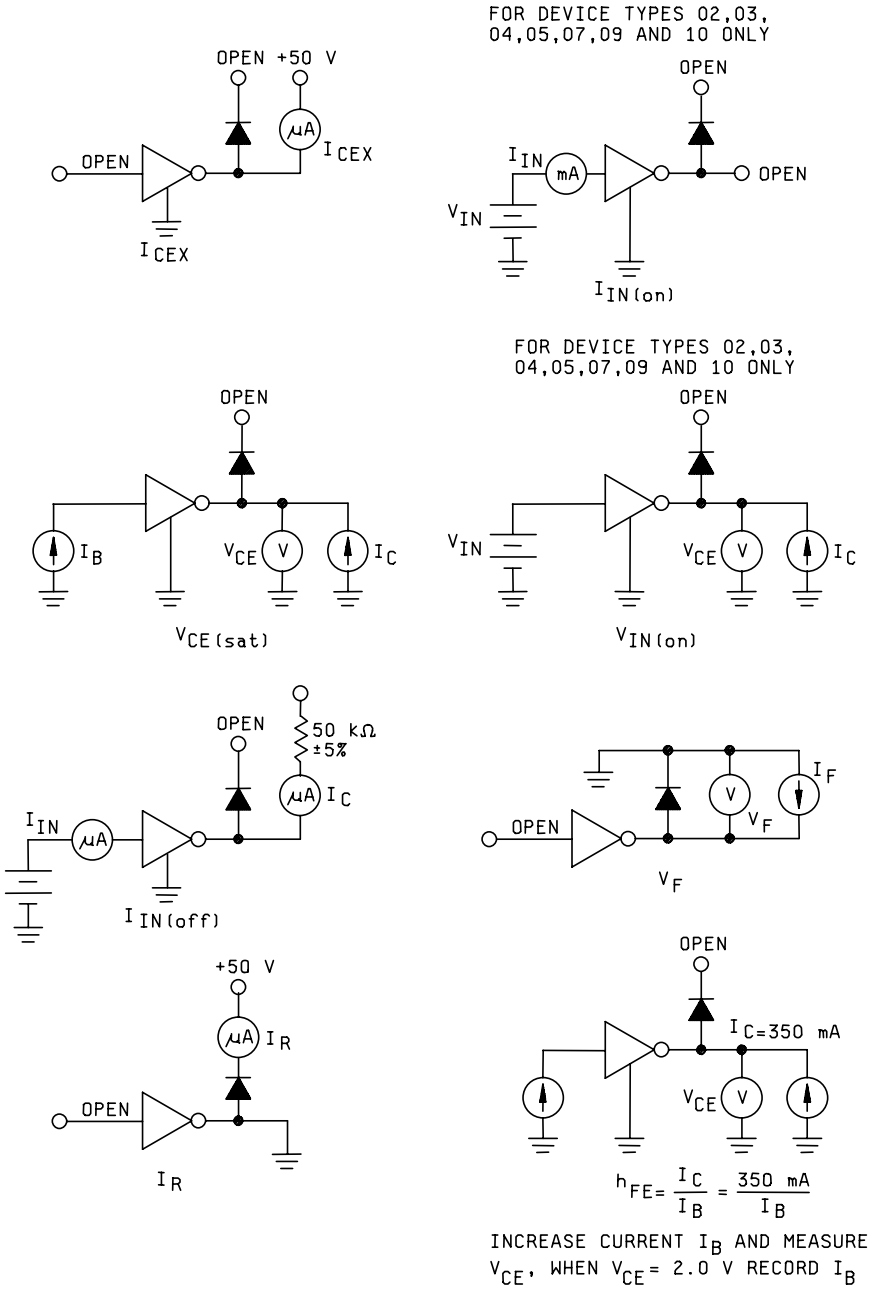


Figure 3. Test circuit for static tests .

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 01 AND 06

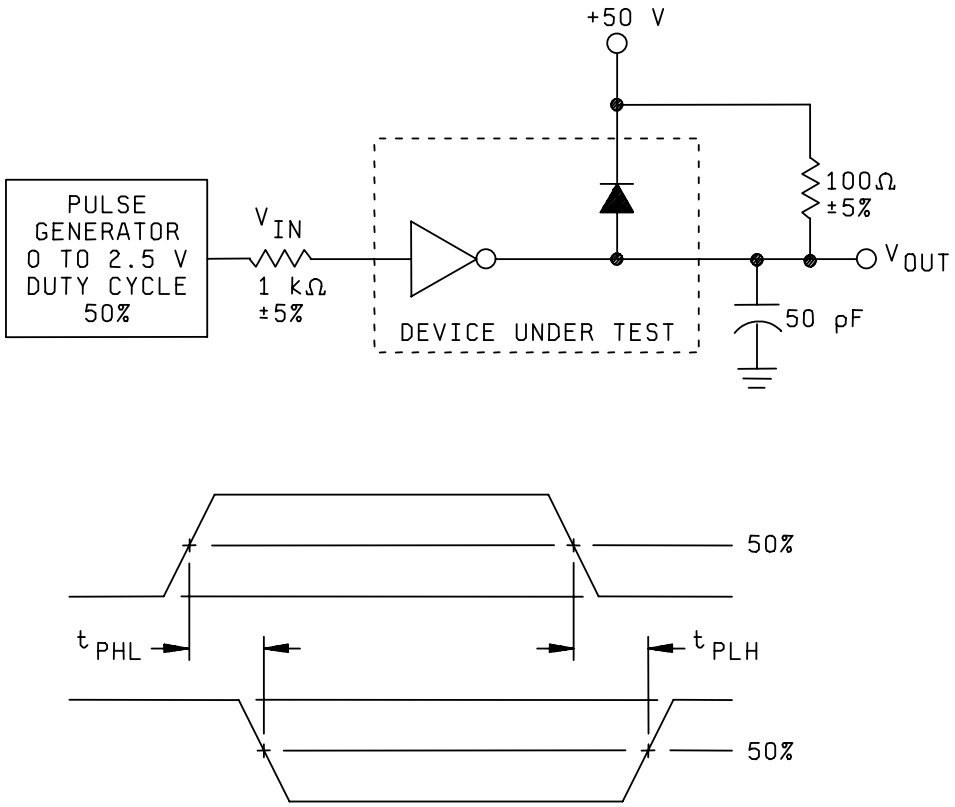


NOTES:
1. f = 10 KHz.
2. Duty cycle = 50 percent.
3. External 1 kΩ resistor.

FIGURE 4. Switching time test circuits and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 02 AND 07

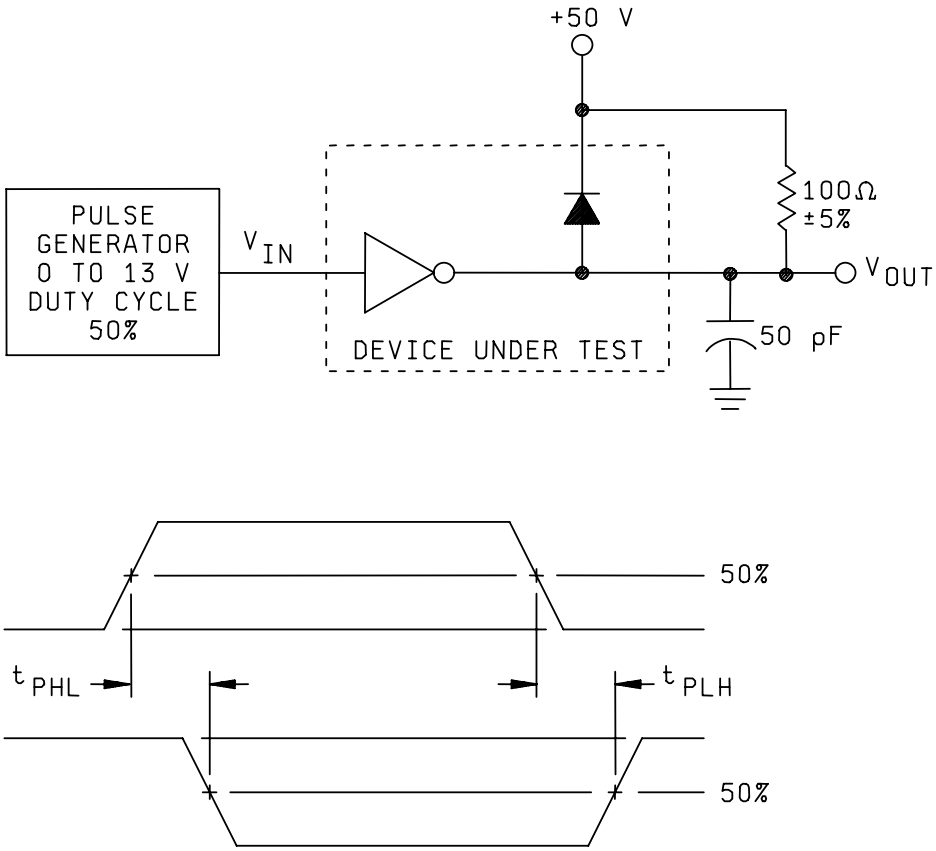


NOTES:
1. f = 10 KHz.
2. Duty cycle = 50 percent.

FIGURE 4. Switching time test circuits and waveforms – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 03 AND 08

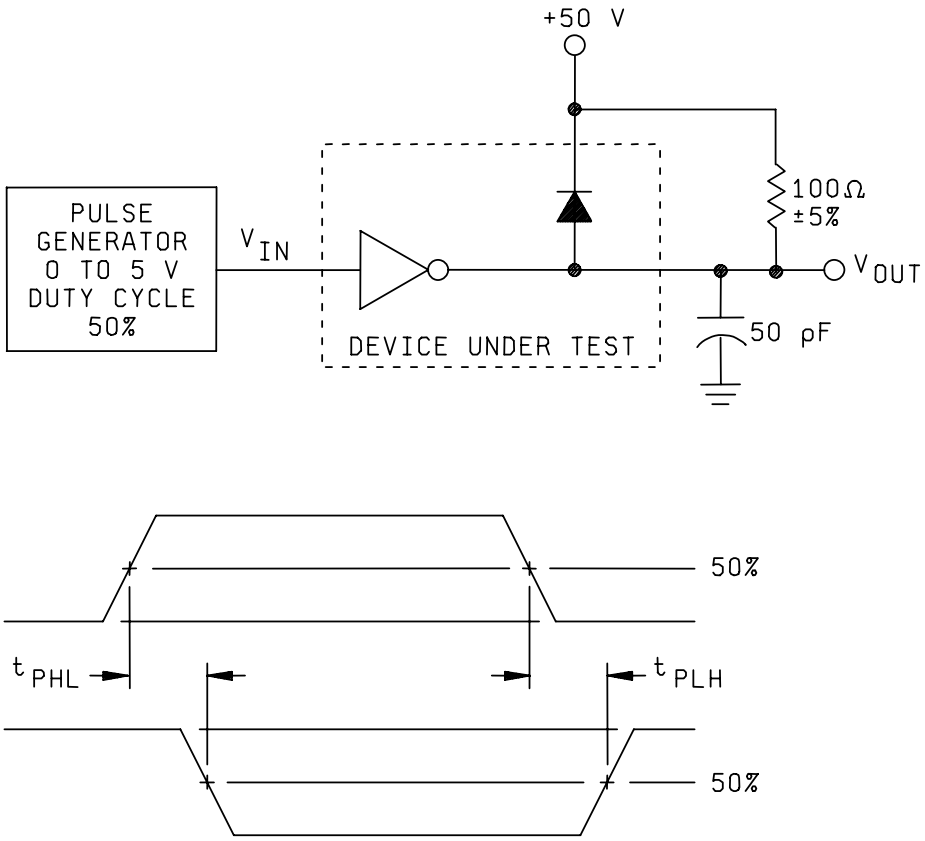


NOTES:
1. f = 10 KHz.
2. Duty cycle = 50 percent.

FIGURE 4. Switching time test circuits and waveforms – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 04 AND 09

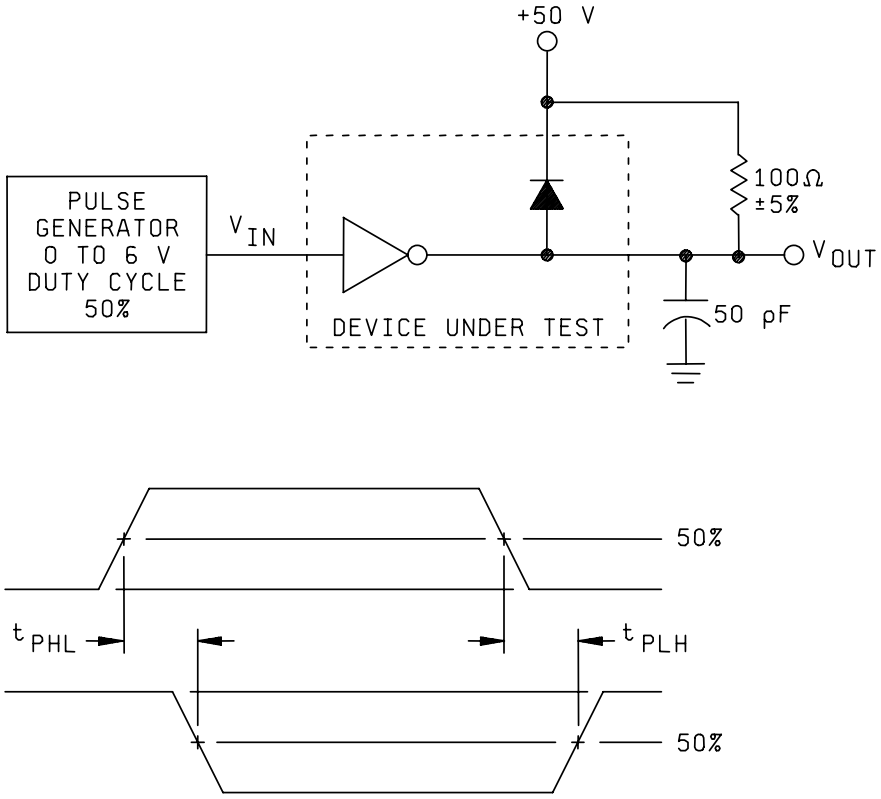


NOTES:
1. f = 10 KHz.
2. Duty cycle = 50 percent.

FIGURE 4. Switching time test circuits and waveforms – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 05 AND 10

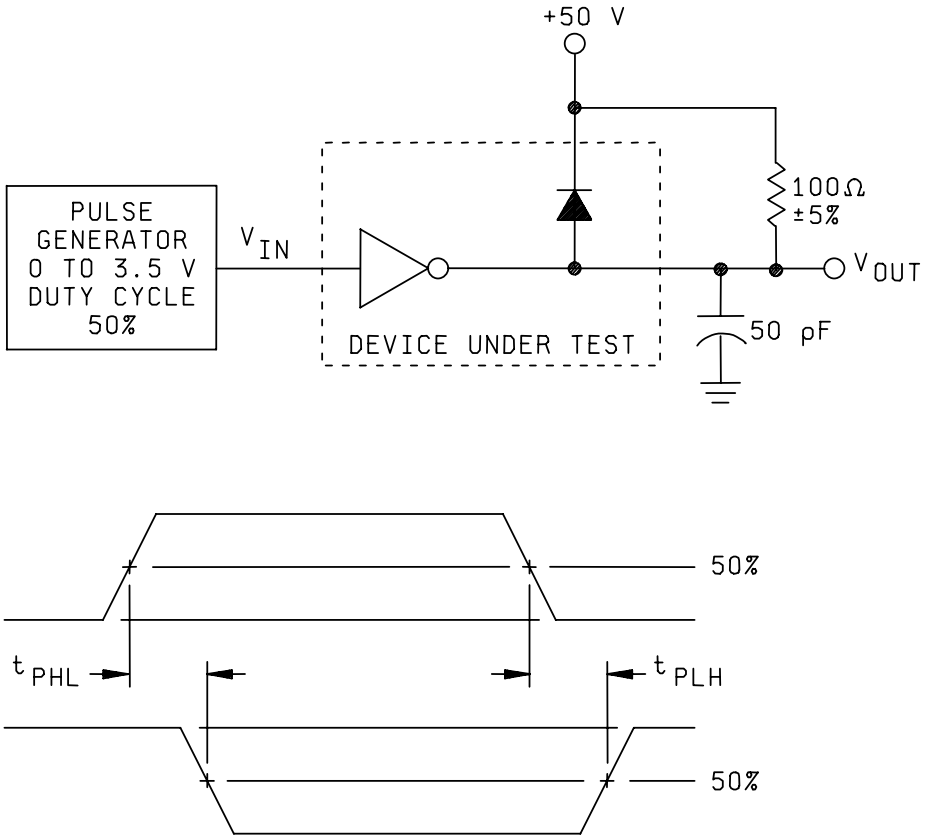


NOTES:
1. f = 10 KHz.
2. Duty cycle = 50 percent.

FIGURE 4. Switching time test circuits and waveforms – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 01,02,03,04 AND 05

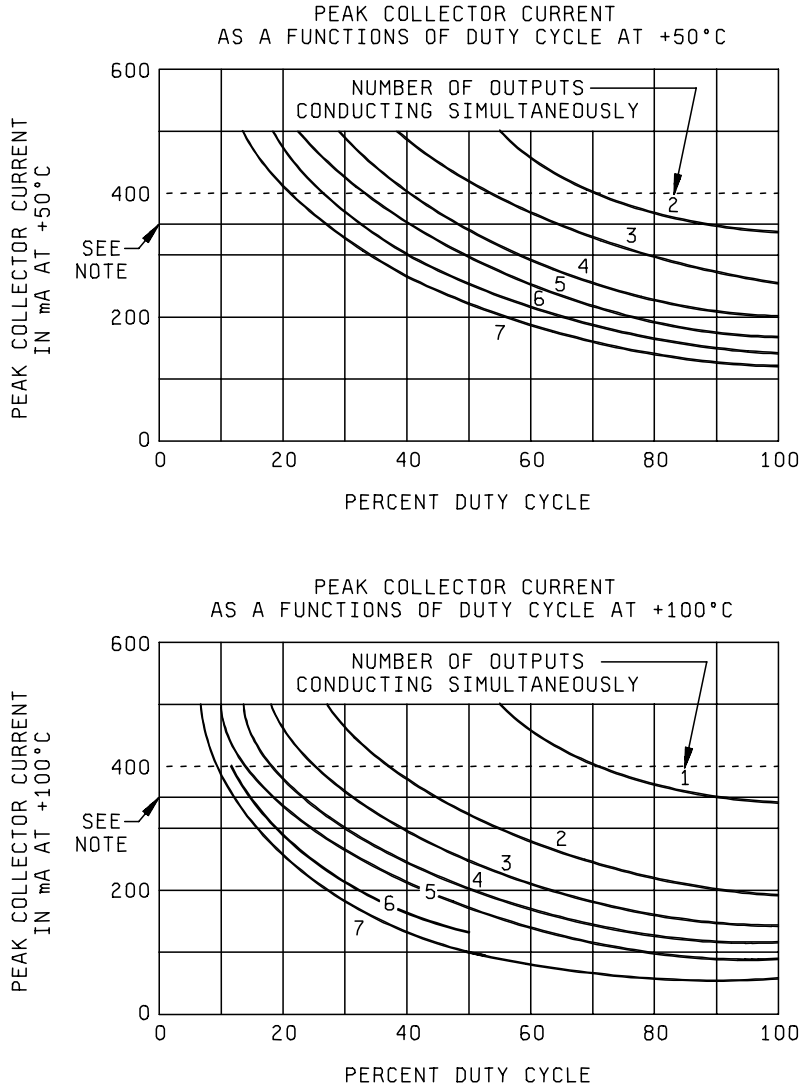


* Line indicates the recommended maximum current of 350 mA.

FIGURE 5. Peak collector current as a function of duty cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 01,02,03,04 AND 05

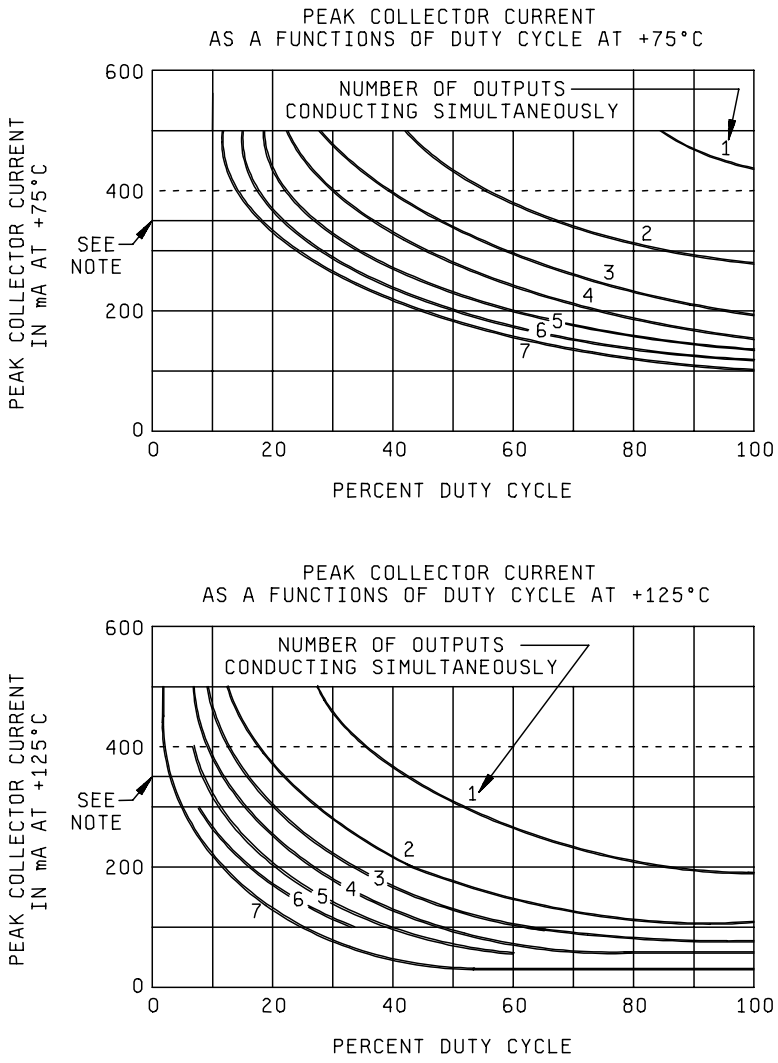


* Line indicates the recommended maximum current of 350 mA.

FIGURE 5. Peak collector current as a function of duty cycle – continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 06,07,08,09 AND 10

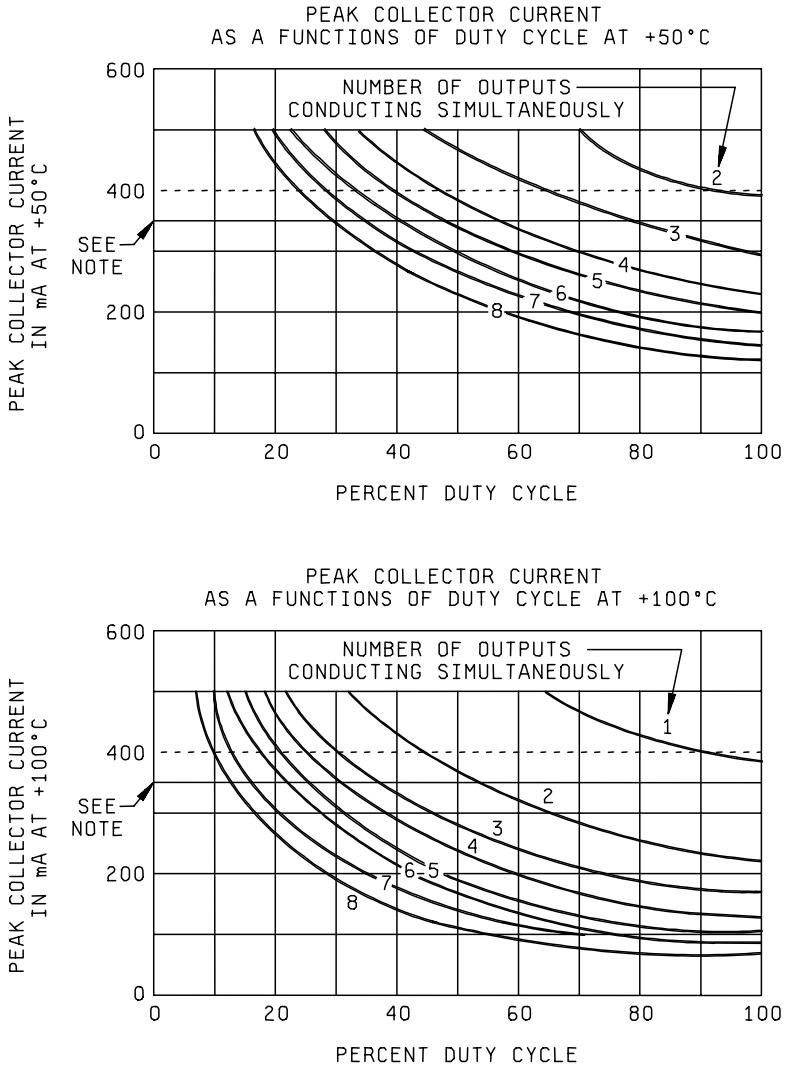


* Line indicates the recommended maximum current of 350 mA.

FIGURE 5. Peak collector current as a function of duty cycle – continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

DEVICE TYPES 06,07,08,09 AND 10

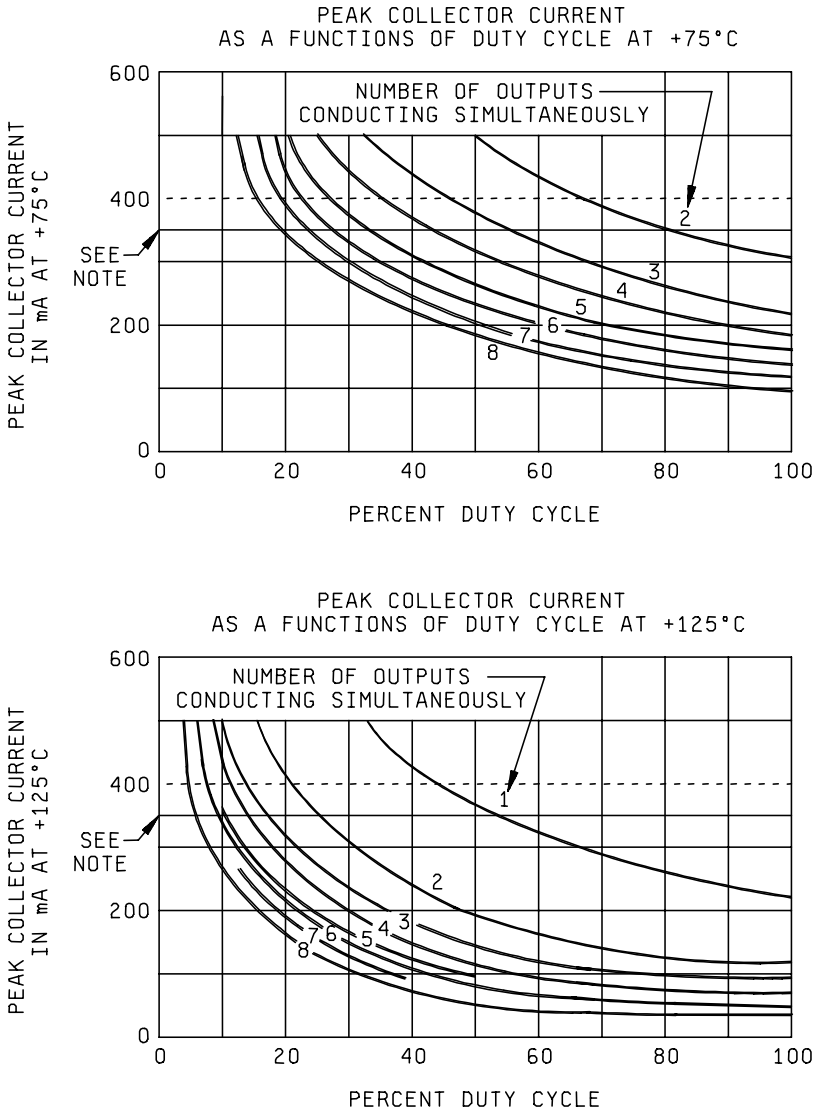

* Line indicates the recommended maximum current of 350 mA.

FIGURE 5. Peak collector current as a function of duty cycle – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1								0 V							50 V	50 V	OUT_1		10.0	µA
			2								"									OUT_2		"	"
			3								"						50 V			OUT_3		"	"
			4								"					50 V				OUT_4		"	"
			5								"				50 V					OUT_5		"	"
			6								"			50 V						OUT_6		"	"
			7								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	8	500 µA							"								350 mA	OUT_1		1.6	V
			9		500 µA						"							350 mA		OUT_2		"	"
			10			500 µA					"						350 mA			OUT_3		"	"
			11				500 µA				"					350 mA				OUT_4		"	"
			12					500 µA			"				350 mA					OUT_5		"	"
			13						500 µA		"			350 mA						OUT_6		"	"
			14							500 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	15	350 µA							"								200 mA	OUT_1		1.3	V
			16		350 µA						"							200 mA		OUT_2		"	"
			17			350 µA					"						200 mA			OUT_3		"	"
			18				350 µA				"					200 mA				OUT_4		"	"
			19					350 µA			"				200 mA					OUT_5		"	"
			20						350 µA		"			200 mA						OUT_6		"	"
			21							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	22	250 µA							"								100 mA	OUT_1		1.1	V
			23		250 µA						"							100 mA		OUT_2		"	"
			24			250 µA					"						100 mA			OUT_3		"	"
			25				250 µA				"					100 mA				OUT_4		"	"
			26					250 µA			"				100 mA					OUT_5		"	"
			27						250 µA		"			100 mA						OUT_6		"	"
			28							250 µA	"		100 mA							OUT_7		"	"
	$I_{IN(off)}$		29	25 µA							"								50 V	OUT_1		500	µA
			30		25 µA						"							50V		OUT_2		"	"
			31			25 µA					"						50 V			OUT_3		"	"
			32				25 µA				"					50 V				OUT_4		"	"
			33					25 µA			"				50 V					OUT_5		"	"
			34						25 µA		"			50 V						OUT_6		"	"
			35							25 µA	"		50 V							OUT_7		"	"
	I_R		36								"	50 V						0V	0 V	COM		10.0	µA
			37								"	"								COM		"	"
			38								"	"					0 V			COM		"	"
			39								"	"				0 V				COM		"	"
			40								"	"			0 V					COM		"	"
			41								"	"		0 V						COM		"	"
			42								"	"	0 V							COM		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	V_F		43								0 V	0 V						350 mA	350 mA	OUT_1		2.0	V
			44								"	"								OUT_2		"	"
			45								"	"					350 mA			OUT_3		"	"
			46								"	"				350 mA				OUT_4		"	"
			47								"	"			350 mA					OUT_5		"	"
			48								"	"		350 mA						OUT_6		"	"
			49								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	50	IB_1							"									IB_1-OUT_1	1000		
			51		IB_2						"							350 mA		IB_2-OUT_2	"		
			52			IB_3					"						350 mA			IB_3-OUT_3	"		
			53				IB_4				"					350 mA				IB_4-OUT_4	"		
			54					IB_5			"				350 mA					IB_5-OUT_5	"		
			55						IB_6		"			350 mA						IB_6-OUT_6	"		
			56							IB_7	"		350 mA							IB_7-OUT_7	"		
2 T_A = +125°C	I_{CEX}		57								0 V								50 V	OUT_1		10.0	µA
			58								"							50 V		OUT_2		"	"
			59								"						50 V			OUT_3		"	"
			60								"					50 V				OUT_4		"	"
			61								"				50 V					OUT_5		"	"
			62								"			50 V						OUT_6		"	"
			63								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	64	500 µA							"								350 mA	OUT_1		1.8	V
			65		500 µA						"							350 mA		OUT_2		"	"
			66			500 µA					"						350 mA			OUT_3		"	"
			67				500 µA				"					350 mA				OUT_4		"	"
			68					500 µA			"				350 mA					OUT_5		"	"
			69						500 µA		"			350 mA						OUT_6		"	"
			70							500 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	71	350 µA							"								200 mA	OUT_1		1.5	V
			72		350 µA						"							200 mA		OUT_2		"	"
			73			350 µA					"						200 mA			OUT_3		"	"
			74				350 µA				"					200 mA				OUT_4		"	"
			75					350 µA			"				200 mA					OUT_5		"	"
			76						350 µA		"			200 mA						OUT_6		"	"
			77							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	78	250 µA							"								100 mA	OUT_1		1.3	V
			79		250 µA						"							100 mA		OUT_2		"	"
			80			250 µA					"						100 mA			OUT_3		"	"
			81				250 µA				"					100 mA				OUT_4		"	"
			82					250 µA			"				100 mA					OUT_5		"	"
			83						250 µA		"			100 mA						OUT_6		"	"
			84							250 µA	"		100 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(off)}$		85	25 µA							0 V								50 V	OUT_1		500	µA
			86		25 µA						"							50V		OUT_2		"	"
			87			25 µA					"						50 V			OUT_3		"	"
			88				25 µA				"					50 V				OUT_4		"	"
			89					25 µA			"				50 V					OUT_5		"	"
			90						25 µA		"			50 V						OUT_6		"	"
			91							25 µA	"		50 V							OUT_7		"	"
	I_R		92								"	50 V							0 V	COM		10.0	µA
			93								"	"						0V		COM		"	"
			94								"	"					0 V			COM		"	"
			95								"	"				0 V				COM		"	"
			96								"	"			0 V					COM		"	"
			97								"	"		0 V						COM		"	"
			98								"	"	0 V							COM		"	"
	V_F		99								0 V	0 V							350 mA	OUT_1		2.0	V
			100								"	"						350 mA		OUT_2		"	"
			101								"	"					350 mA			OUT_3		"	"
			102								"	"				350 mA				OUT_4		"	"
			103								"	"			350 mA					OUT_5		"	"
			104								"	"		350 mA						OUT_6		"	"
			105								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	106	IB_1							"								350 mA	IB_1-OUT_1	1000		
			107		IB_2						"							350 mA		IB_2-OUT_2	"		
			108			IB_3					"						350 mA			IB_3-OUT_3	"		
			109				IB_4				"					350 mA				IB_4-OUT_4	"		
			110					IB_5			"				350 mA					IB_5-OUT_5	"		
			111						IB_6		"			350 mA						IB_6-OUT_6	"		
			112							IB_7	"		350 mA							IB_7-OUT_7	"		
3 T_A = -55°C	I_{CEX}		113								0 V								50 V	OUT_1		10.0	µA
			114								"							50 V		OUT_2		"	"
			115								"						50 V			OUT_3		"	"
			116								"					50 V				OUT_4		"	"
			117								"				50 V					OUT_5		"	"
			118								"			50 V						OUT_6		"	"
			119								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	120	850 µA							"								350 mA	OUT_1		1.8	V
			121		850 µA						"							350 mA		OUT_2		"	"
			122			850 µA					"						350 mA			OUT_3		"	"
			123				850 µA				"					350 mA				OUT_4		"	"
			124					850 µA			"				350 mA					OUT_5		"	"
			125						850 µA		"			350 mA						OUT_6		"	"
			126							850 µA	"		350 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$V_{CE(sat)}$	3007	127	550 µA							0 V								200 mA	OUT_1		1.5	V
			128		550 µA						"							200 mA		OUT_2		"	"
			129			550 µA					"						200 mA			OUT_3		"	"
			130				550 µA				"					200 mA				OUT_4		"	"
			131					550 µA			"				200 mA					OUT_5		"	"
			132						550 µA		"			200 mA						OUT_6		"	"
			133							550 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	134	350 µA							"								100 mA	OUT_1		1.3	V
			135		350 µA						"							100 mA		OUT_2		"	"
			136			350 µA					"						100 mA			OUT_3		"	"
			137				350 µA				"					100 mA				OUT_4		"	"
			138					350 µA			"				100 mA					OUT_5		"	"
			139						350 µA		"			100 mA						OUT_6		"	"
			140							350 µA	"		100 mA							OUT_7		"	"
	$I_{IN(off)}$		141	25 µA							"								50 V	OUT_1		500	µA
			142		25 µA						"							50V		OUT_2		"	"
			143			25 µA					"						50 V			OUT_3		"	"
			144				25 µA				"					50 V				OUT_4		"	"
			145					25 µA			"				50 V					OUT_5		"	"
			146						25 µA		"			50 V						OUT_6		"	"
			147							25 µA	"		50 V							OUT_7		"	"
	I_R		148								"	50 V							0 V	COM		10.0	µA
			149								"	"						0V		COM		"	"
			150								"	"					0 V			COM		"	"
			151								"	"				0 V				COM		"	"
			152								"	"			0 V					COM		"	"
			153								"	"		0 V						COM		"	"
			154								"	"	0 V							COM		"	"
	V_F		155								0 V	0 V							350 mA	OUT_1		2.0	V
			156								"	"						350 mA		OUT_2		"	"
			157								"	"					350 mA			OUT_3		"	"
			158								"	"				350 mA				OUT_4		"	"
			159								"	"			350 mA					OUT_5		"	"
			160								"	"		350 mA						OUT_6		"	"
			161								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	162	IB_1							"								350 mA	IB_1-OUT_1	500		
			163		IB_2						"							350 mA		IB_2-OUT_2	"		
			164			IB_3					"						350 mA			IB_3-OUT_3	"		
			165				IB_4				"					350 mA				IB_4-OUT_4	"		
			166					IB_5			"				350 mA					IB_5-OUT_5	"		
			167						IB_6		"			350 mA						IB_6-OUT_6	"		
			168							IB_7	"		350 mA							IB_7-OUT_7	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	169	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	0 V							OUT	OUT	IN_1-OUT_1		750	ns
			170								"						OUT			IN_2-OUT_2		"	"
			171								"					OUT				IN_3-OUT_3		"	"
			172								"				OUT					IN_4-OUT_4		"	"
			173								"			OUT						IN_5-OUT_5		"	"
			174								"			OUT						IN_6-OUT_6		"	"
			175								"		OUT							IN_7-OUT_7		"	"
	t_{PHL}	3003 Fig. 4	176	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	"							OUT	OUT	IN_1-OUT_1		300	ns
			177								"						OUT			IN_2-OUT_2		"	"
			178								"					OUT				IN_3-OUT_3		"	"
			179								"				OUT					IN_4-OUT_4		"	"
			180								"			OUT						IN_5-OUT_5		"	"
			181								"			OUT						IN_6-OUT_6		"	"
			182								"		OUT							IN_7-OUT_7		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1								0 V							50 V	50 V	OUT_1		10.0	µA
			2								"									OUT_2		"	"
			3								"						50 V			OUT_3		"	"
			4								"					50 V				OUT_4		"	"
			5								"				50 V					OUT_5		"	"
			6								"			50 V						OUT_6		"	"
			7								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	8	500 µA							"								350 mA	OUT_1		1.6	V
			9		500 µA						"							350 mA		OUT_2		"	"
			10			500 µA					"						350 mA			OUT_3		"	"
			11				500 µA				"					350 mA				OUT_4		"	"
			12					500 µA			"				350 mA					OUT_5		"	"
			13						500 µA		"			350 mA						OUT_6		"	"
			14							500 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	15	350 µA							"								200 mA	OUT_1		1.3	V
			16		350 µA						"							200 mA		OUT_2		"	"
			17			350 µA					"						200 mA			OUT_3		"	"
			18				350 µA				"					200 mA				OUT_4		"	"
			19					350 µA			"				200 mA					OUT_5		"	"
			20						350 µA		"			200 mA						OUT_6		"	"
			21							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	22	250 µA							"								100 mA	OUT_1		1.1	V
			23		250 µA						"							100 mA		OUT_2		"	"
			24			250 µA					"						100 mA			OUT_3		"	"
			25				250 µA				"					100 mA				OUT_4		"	"
			26					250 µA			"				100 mA					OUT_5		"	"
			27						250 µA		"			100 mA						OUT_6		"	"
			28							250 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		29	17 V							"									IN_1	575	1300	µA
			30		17 V						"									IN_2	"	"	"
			31			17 V					"									IN_3	"	"	"
			32				17 V				"									IN_4	"	"	"
			33					17 V			"									IN_5	"	"	"
			34						17 V		"									IN_6	"	"	"
			35							17 V	"									IN_7	"	"	"
	$I_{IN(off)}$		36	25 µA							"								50 V	OUT_1		500	µA
			37		25 µA						"							50V		OUT_2		"	"
			38			25 µA					"						50 V			OUT_3		"	"
			39				25 µA				"					50 V				OUT_4		"	"
			40					25 µA			"				50 V					OUT_5		"	"
			41						25 µA		"			50 V						OUT_6		"	"
			42							25 µA	"		50 V							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$V_{IN(on)}$		43	13 V	13 V	13 V	13 V	13 V	13 V	13 V	0 V		300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	OUT_1		2.0	V
			44								"									OUT_2		"	"
			45								"									OUT_3		"	"
			46								"									OUT_4		"	"
			47								"									OUT_5		"	"
			48								"									OUT_6		"	"
			49								"									OUT_7		"	"
	I_R		50								"	50 V							0 V	COM		10.0	µA
			51								"	"								COM		"	"
			52								"	"								COM		"	"
			53								"	"								COM		"	"
			54								"	"								COM		"	"
			55								"	"								COM		"	"
			56								"	"	0 V	0 V	0 V	0 V	0 V	0V		COM		"	"
	V_F		57								0 V	0 V							350 mA	OUT_1		2.0	V
			58								"	"								OUT_2		"	"
			59								"	"								OUT_3		"	"
			60								"	"								OUT_4		"	"
			61								"	"								OUT_5		"	"
			62								"	"								OUT_6		"	"
			63								"	"	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA		OUT_7		"	"
	h_{FE}	3003	64	IB_1	IB_2	IB_3	IB_4	IB_5	IB_6	IB_7	"								350 mA	IB_1-OUT_1	1000		
			65								"									IB_2-OUT_2	"		
			66								"									IB_3-OUT_3	"		
			67								"									IB_4-OUT_4	"		
			68								"									IB_5-OUT_5	"		
			69								"									IB_6-OUT_6	"		
			70								"		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA		IB_7-OUT_7	"		
2 T_A = +125°C	I_{CEX}		71								0 V								50 V	OUT_1		10.0	µA
			72								"									OUT_2		"	"
			73								"									OUT_3		"	"
			74								"									OUT_4		"	"
			75								"									OUT_5		"	"
			76								"									OUT_6		"	"
			77								"		50 V	50 V	50 V	50 V	50 V	50 V		OUT_7		"	"
	$V_{CE(sat)}$	3007	78	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	500 µA	"								350 mA	OUT_1		1.8	V
			79								"									OUT_2		"	"
			80								"									OUT_3		"	"
			81								"									OUT_4		"	"
			82								"									OUT_5		"	"
			83								"									OUT_6		"	"
			84								"		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA		OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{CE(sat)}$	3007	85	350 µA							0 V								200 mA	OUT_1		1.5	V
			86		350 µA						"							200 mA		OUT_2		"	"
			87			350 µA					"						200 mA			OUT_3		"	"
			88				350 µA				"					200 mA				OUT_4		"	"
			89					350 µA			"				200 mA					OUT_5		"	"
			90						350 µA		"			200 mA						OUT_6		"	"
			91							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	92	250 µA							"								100 mA	OUT_1		1.3	V
			93		250 µA						"							100 mA		OUT_2		"	"
			94			250 µA					"						100 mA			OUT_3		"	"
			95				250 µA				"					100 mA				OUT_4		"	"
			96					250 µA			"				100 mA					OUT_5		"	"
			97						250 µA		"			100 mA						OUT_6		"	"
			98							250 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		99	17 V							"									IN_1	575	1300	µA
			100		17 V						"									IN_2	"	"	"
			101			17 V					"									IN_3	"	"	"
			102				17 V				"									IN_4	"	"	"
			103					17 V			"									IN_5	"	"	"
			104						17 V		"									IN_6	"	"	"
			105							17 V	"									IN_7	"	"	"
	$I_{IN(off)}$		106	25 µA							"									OUT_1		500	µA
			107		25 µA						"							50V		OUT_2		"	"
			108			25 µA					"						50 V			OUT_3		"	"
			109				25 µA				"					50 V				OUT_4		"	"
			110					25 µA			"				50 V					OUT_5		"	"
			111						25 µA		"			50 V						OUT_6		"	"
			112							25 µA	"		50 V							OUT_7		"	"
	$V_{IN(on)}$		113	13 V							0 V								300 mA	OUT_1		2.0	V
			114		13 V						"							300 mA		OUT_2		"	"
			115			13 V					"						300 mA			OUT_3		"	"
			116				13 V				"					300 mA				OUT_4		"	"
			117					13 V			"				300 mA					OUT_5		"	"
			118						13 V		"			300 mA						OUT_6		"	"
			119							13 V	"		300 mA							OUT_7		"	"
	I_R		120								"	50 V							0 V	COM		10.0	µA
			121								"	"						0V		COM		"	"
			122								"	"					0 V			COM		"	"
			123								"	"				0 V				COM		"	"
			124								"	"			0 V					COM		"	"
			125								"	"		0 V						COM		"	"
			126								"	"	0 V							COM		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	V_F		127								0 V	0 V							350 mA	OUT_1		2.0	V
			128								"	"						350 mA		OUT_2		"	"
			129								"	"					350 mA			OUT_3		"	"
			130								"	"				350 mA				OUT_4		"	"
			131								"	"			350 mA					OUT_5		"	"
			132								"	"		350 mA						OUT_6		"	"
			133								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	134	IB_1							"								350 mA	IB_1-OUT_1	1000		
			135		IB_2						"							350 mA		IB_2-OUT_2	"		
			136			IB_3					"						350 mA			IB_3-OUT_3	"		
			137				IB_4				"					350 mA				IB_4-OUT_4	"		
			138					IB_5			"				350 mA					IB_5-OUT_5	"		
			139						IB_6		"			350 mA						IB_6-OUT_6	"		
			140							IB_7	"		350 mA							IB_7-OUT_7	"		
3 T_A = -55°C	I_{CEX}		141								0 V								50 V	OUT_1		10.0	µA
			142								"							50 V		OUT_2		"	"
			143								"						50 V			OUT_3		"	"
			144								"					50 V				OUT_4		"	"
			145								"				50 V					OUT_5		"	"
			146								"			50 V						OUT_6		"	"
			147								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	148	850 µA							"								350 mA	OUT_1		1.8	V
			149		850 µA						"							350 mA		OUT_2		"	"
			150			850 µA					"						350 mA			OUT_3		"	"
			151				850 µA				"					350 mA				OUT_4		"	"
			152					850 µA			"				350 mA					OUT_5		"	"
			153						850 µA		"			350 mA						OUT_6		"	"
			154							850 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	155	550 µA							"								200 mA	OUT_1		1.5	V
			156		550 µA						"							200 mA		OUT_2		"	"
			157			550 µA					"						200 mA			OUT_3		"	"
			158				550 µA				"					200 mA				OUT_4		"	"
			159					550 µA			"				200 mA					OUT_5		"	"
			160						550 µA		"			200 mA						OUT_6		"	"
			161							550 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	162	350 µA							"								100 mA	OUT_1		1.3	V
			163		350 µA						"							100 mA		OUT_2		"	"
			164			350 µA					"						100 mA			OUT_3		"	"
			165				350 µA				"					100 mA				OUT_4		"	"
			166					350 µA			"				100 mA					OUT_5		"	"
			167						350 µA		"			100 mA						OUT_6		"	"
			168							350 µA	"		100 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$I_{IN(on)}$		169	17 V							0 V									IN_1	575	1300	µA
			170		17 V						"									IN_2	"	"	"
			171			17 V					"									IN_3	"	"	"
			172				17 V				"									IN_4	"	"	"
			173					17 V			"									IN_5	"	"	"
			174						17 V		"									IN_6	"	"	"
			175							17 V	"									IN_7	"	"	"
	$I_{IN(off)}$		176	25 µA							"								50 V	OUT_1		500	µA
			177		25 µA						"							50V		OUT_2		"	"
			178			25 µA					"						50 V			OUT_3		"	"
			179				25 µA				"					50 V				OUT_4		"	"
			180					25 µA			"				50 V					OUT_5		"	"
			181						25 µA		"			50 V						OUT_6		"	"
			182							25 µA	"		50 V							OUT_7		"	"
	$V_{IN(on)}$		183	18 V							0 V								300 mA	OUT_1		2.0	V
			184		18 V						"							300 mA		OUT_2		"	"
			185			18 V					"						300 mA			OUT_3		"	"
			186				18 V				"					300 mA				OUT_4		"	"
			187					18 V			"				300 mA					OUT_5		"	"
			188						18 V		"			300 mA						OUT_6		"	"
			189							18 V	"		300 mA							OUT_7		"	"
	I_R		190								"	50 V							0 V	COM		10.0	µA
			191								"	"						0V		COM		"	"
			192								"	"					0 V			COM		"	"
			193								"	"				0 V				COM		"	"
			194								"	"			0 V					COM		"	"
			195								"	"		0 V						COM		"	"
			196								"	"	0 V							COM		"	"
	V_F		197								0 V	0 V							350 mA	OUT_1		2.0	V
			198								"	"						350 mA		OUT_2		"	"
			199								"	"					350 mA			OUT_3		"	"
			200								"	"				350 mA				OUT_4		"	"
			201								"	"			350 mA					OUT_5		"	"
			202								"	"		350 mA						OUT_6		"	"
			203								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	204	IB_1							"								350 mA	IB_1-OUT_1	500		
			205		IB_2						"							350 mA		IB_2-OUT_2	"		
			206			IB_3					"						350 mA			IB_3-OUT_3	"		
			207				IB_4				"					350 mA				IB_4-OUT_4	"		
			208					IB_5			"				350 mA					IB_5-OUT_5	"		
			209						IB_6		"			350 mA						IB_6-OUT_6	"		
			210							IB_7	"		350 mA							IB_7-OUT_7	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	211	IN_1							0 V								OUT	IN_1-OUT_1		750	ns
			212		IN_2						"							OUT		IN_2-OUT_2		"	"
			213			IN_3					"						OUT			IN_3-OUT_3		"	"
			214				IN_4				"					OUT				IN_4-OUT_4		"	"
			215					IN_5			"				OUT					IN_5-OUT_5		"	"
			216						IN_6		"			OUT						IN_6-OUT_6		"	"
			217							IN_7	"		OUT							IN_7-OUT_7		"	"
	t_{PHL}	3003 Fig. 4	218	IN_1							"								OUT	IN_1-OUT_1		300	ns
			219		IN_2						"							OUT		IN_2-OUT_2		"	"
			220			IN_3					"						OUT			IN_3-OUT_3		"	"
			221				IN_4				"					OUT				IN_4-OUT_4		"	"
			222					IN_5			"				OUT					IN_5-OUT_5		"	"
			223						IN_6		"			OUT						IN_6-OUT_6		"	"
			224							IN_7	"		OUT							IN_7-OUT_7		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 .

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1								0 V								50 V	OUT_1		10.0	µA
			2								"							50 V		OUT_2		"	"
			3								"						50 V			OUT_3		"	"
			4								"					50 V				OUT_4		"	"
			5								"				50 V					OUT_5		"	"
			6								"			50 V						OUT_6		"	"
			7								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	8	500 µA							"								350 mA	OUT_1		1.6	V
			9		500 µA						"							350 mA		OUT_2		"	"
			10			500 µA					"						350 mA			OUT_3		"	"
			11				500 µA				"					350 mA				OUT_4		"	"
			12					500 µA			"				350 mA					OUT_5		"	"
			13						500 µA		"			350 mA						OUT_6		"	"
			14							500 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	15	350 µA							"								200 mA	OUT_1		1.3	V
			16		350 µA						"							200 mA		OUT_2		"	"
			17			350 µA					"						200 mA			OUT_3		"	"
			18				350 µA				"					200 mA				OUT_4		"	"
			19					350 µA			"				200 mA					OUT_5		"	"
			20						350 µA		"			200 mA						OUT_6		"	"
			21							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	22	250 µA							"								100 mA	OUT_1		1.1	V
			23		250 µA						"							100 mA		OUT_2		"	"
			24			250 µA					"						100 mA			OUT_3		"	"
			25				250 µA				"					100 mA				OUT_4		"	"
			26					250 µA			"				100 mA					OUT_5		"	"
			27						250 µA		"			100 mA						OUT_6		"	"
			28							250 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		29	3.85 V							"									IN_1	650	1350	µA
			30		3.85 V						"									IN_2	"	"	"
			31			3.85 V					"									IN_3	"	"	"
			32				3.85 V				"									IN_4	"	"	"
			33					3.85 V			"									IN_5	"	"	"
			34						3.85 V		"									IN_6	"	"	"
			35							3.85 V	"									IN_7	"	"	"
	$I_{IN(off)}$		36	25 µA							"								50 V	OUT_1		500	µA
			37		25 µA						"							50V		OUT_2		"	"
			38			25 µA					"						50 V			OUT_3		"	"
			39				25 µA				"					50 V				OUT_4		"	"
			40					25 µA			"				50 V					OUT_5		"	"
			41						25 µA		"			50 V						OUT_6		"	"
			42							25 µA	"		50 V							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$V_{IN(on)}$		43	2.0 V							0 V									OUT_1		2.0	V
			44		2.0 V						"							200 mA		OUT_2		"	"
			45			2.0 V					"						200 mA			OUT_3		"	"
			46				2.0 V				"					200 mA				OUT_4		"	"
			47					2.0 V			"				200 mA					OUT_5		"	"
			48						2.0 V		"			200 mA						OUT_6		"	"
			49							2.0 V	"		200 mA							OUT_7		"	"
	$V_{IN(on)}$		50	2.2 V							0 V								250 mA	OUT_1		2.0	V
			51		2.2 V						"							250 mA		OUT_2		"	"
			52			2.2 V					"						250 mA			OUT_3		"	"
			53				2.2 V				"					250 mA				OUT_4		"	"
			54					2.2 V			"				250 mA					OUT_5		"	"
			55						2.2 V		"			250 mA						OUT_6		"	"
			56							2.2 V	"		250 mA							OUT_7		"	"
	$V_{IN(on)}$		57	2.4 V							0 V								300 mA	OUT_1		2.0	V
			58		2.4 V						"							300 mA		OUT_2		"	"
			59			2.4 V					"						300 mA			OUT_3		"	"
			60				2.4 V				"					300 mA				OUT_4		"	"
			61					2.4 V			"				300 mA					OUT_5		"	"
			62						2.4 V		"			300 mA						OUT_6		"	"
			63							2.4 V	"		300 mA							OUT_7		"	"
	I_R		64								"	50 V							0 V	COM		10.0	µA
			65								"	"						0V		COM		"	"
			66								"	"					0 V			COM		"	"
			67								"	"				0 V				COM		"	"
			68								"	"			0 V					COM		"	"
			69								"	"		0 V						COM		"	"
			70								"	"	0 V							COM		"	"
	V_F		71								0 V	0 V							350 mA	OUT_1		2.0	V
			72								"	"						350 mA		OUT_2		"	"
			73								"	"					350 mA			OUT_3		"	"
			74								"	"				350 mA				OUT_4		"	"
			75								"	"			350 mA					OUT_5		"	"
			76								"	"		350 mA						OUT_6		"	"
			77								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	78	IB_1							"								350 mA	IB_1-OUT_1	1000		
			79		IB_2						"							350 mA		IB_2-OUT_2	"		
			80			IB_3					"						350 mA			IB_3-OUT_3	"		
			81				IB_4				"					350 mA				IB_4-OUT_4	"		
			82					IB_5			"				350 mA					IB_5-OUT_5	"		
			83						IB_6		"			350 mA						IB_6-OUT_6	"		
			84							IB_7	"		350 mA							IB_7-OUT_7	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	I_{CEX}		85								0 V							50 V	50 V	OUT_1		10.0	µA
			86								"									OUT_2		"	"
			87								"						50 V			OUT_3		"	"
			88								"					50 V				OUT_4		"	"
			89								"				50 V					OUT_5		"	"
			90								"			50 V						OUT_6		"	"
			91								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	92	500 µA							"								350 mA	OUT_1		1.8	V
			93		500 µA						"							350 mA		OUT_2		"	"
			94			500 µA					"						350 mA			OUT_3		"	"
			95				500 µA				"					350 mA				OUT_4		"	"
			96					500 µA			"				350 mA					OUT_5		"	"
			97						500 µA		"			350 mA						OUT_6		"	"
			98							500 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	99	350 µA							"								200 mA	OUT_1		1.5	V
			100		350 µA						"							200 mA		OUT_2		"	"
			101			350 µA					"						200 mA			OUT_3		"	"
			102				350 µA				"					200 mA				OUT_4		"	"
			103					350 µA			"				200 mA					OUT_5		"	"
			104						350 µA		"			200 mA						OUT_6		"	"
			105							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	106	250 µA							"								100 mA	OUT_1		1.3	V
			107		250 µA						"							100 mA		OUT_2		"	"
			108			250 µA					"						100 mA			OUT_3		"	"
			109				250 µA				"					100 mA				OUT_4		"	"
			110					250 µA			"				100 mA					OUT_5		"	"
			111						250 µA		"			100 mA						OUT_6		"	"
			112							250 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		113	3.85 V							"									IN_1	650	1350	µA
			114		3.85 V						"									IN_2	"	"	"
			115			3.85 V					"									IN_3	"	"	"
			116				3.85 V				"									IN_4	"	"	"
			117					3.85 V			"									IN_5	"	"	"
			118						3.85 V		"									IN_6	"	"	"
			119							3.85 V	"									IN_7	"	"	"
	$I_{IN(off)}$		120	25 µA							"								50 V	OUT_1		500	µA
			121		25 µA						"							50V		OUT_2		"	"
			122			25 µA					"						50 V			OUT_3		"	"
			123				25 µA				"					50 V				OUT_4		"	"
			124					25 µA			"				50 V					OUT_5		"	"
			125						25 µA		"			50 V						OUT_6		"	"
			126							25 µA	"		50 V							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{IN(on)}$		127	2.0 V							0 V								200 mA	OUT_1		2.0	V
			128		2.0 V						"							200 mA		OUT_2		"	"
			129			2.0 V					"						200 mA			OUT_3		"	"
			130				2.0 V				"					200 mA				OUT_4		"	"
			131					2.0 V			"				200 mA					OUT_5		"	"
			132						2.0 V		"			200 mA						OUT_6		"	"
			133							2.0 V	"		200 mA							OUT_7		"	"
	$V_{IN(on)}$		134	2.2 V							0 V								250 mA	OUT_1		2.0	V
			135		2.2 V						"							250 mA		OUT_2		"	"
			136			2.2 V					"						250 mA			OUT_3		"	"
			137				2.2 V				"					250 mA				OUT_4		"	"
			138					2.2 V			"				250 mA					OUT_5		"	"
			139						2.2 V		"			250 mA						OUT_6		"	"
			140							2.2 V	"		250 mA							OUT_7		"	"
	$V_{IN(on)}$		141	2.4 V							0 V								300 mA	OUT_1		2.0	V
			142		2.4 V						"							300 mA		OUT_2		"	"
			143			2.4 V					"						300 mA			OUT_3		"	"
			144				2.4 V				"					300 mA				OUT_4		"	"
			145					2.4 V			"				300 mA					OUT_5		"	"
			146						2.4 V		"			300 mA						OUT_6		"	"
			147							2.4 V	"		300 mA							OUT_7		"	"
	I_R		148								"	50 V							0 V	COM		10.0	µA
			149								"	"						0V		COM		"	"
			150								"	"					0 V			COM		"	"
			151								"	"				0 V				COM		"	"
			152								"	"			0 V					COM		"	"
			153								"	"		0 V						COM		"	"
			154								"	"	0 V							COM		"	"
	V_F		155								0 V	0 V							350 mA	OUT_1		2.0	V
			156								"	"						350 mA		OUT_2		"	"
			157								"	"					350 mA			OUT_3		"	"
			158								"	"				350 mA				OUT_4		"	"
			159								"	"			350 mA					OUT_5		"	"
			160								"	"		350 mA						OUT_6		"	"
			161								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	162	IB_1							"								350 mA	IB_1-OUT_1	1000		
			163		IB_2						"							350 mA		IB_2-OUT_2	"		
			164			IB_3					"						350 mA			IB_3-OUT_3	"		
			165				IB_4				"					350 mA				IB_4-OUT_4	"		
			166					IB_5			"				350 mA					IB_5-OUT_5	"		
			167						IB_6		"			350 mA						IB_6-OUT_6	"		
			168							IB_7	"		350 mA							IB_7-OUT_7	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	I_{CEX}		169								0 V								50 V	OUT_1		10.0	µA
			170								"							50 V		OUT_2		"	"
			171								"						50 V			OUT_3		"	"
			172								"					50 V				OUT_4		"	"
			173								"				50 V					OUT_5		"	"
			174								"			50 V						OUT_6		"	"
			175								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	176	850 µA							"								350 mA	OUT_1		1.8	V
			177		850 µA						"							350 mA		OUT_2		"	"
			178			850 µA					"						350 mA			OUT_3		"	"
			179				850 µA				"					350 mA				OUT_4		"	"
			180					850 µA			"				350 mA					OUT_5		"	"
			181						850 µA		"			350 mA						OUT_6		"	"
			182							850 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	183	550 µA							"								200 mA	OUT_1		1.5	V
			184		550 µA						"							200 mA		OUT_2		"	"
			185			550 µA					"						200 mA			OUT_3		"	"
			186				550 µA				"					200 mA				OUT_4		"	"
			187					550 µA			"				200 mA					OUT_5		"	"
			188						550 µA		"			200 mA						OUT_6		"	"
			189							550 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	190	350 µA							"								100 mA	OUT_1		1.3	V
			191		350 µA						"							100 mA		OUT_2		"	"
			192			350 µA					"						100 mA			OUT_3		"	"
			193				350 µA				"					100 mA				OUT_4		"	"
			194					350 µA			"				100 mA					OUT_5		"	"
			195						350 µA		"			100 mA						OUT_6		"	"
			196							350 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		197	3.85 V							"									IN_1	650	1350	µA
			198		3.85 V						"									IN_2	"	"	"
			199			3.85 V					"									IN_3	"	"	"
			200				3.85 V				"									IN_4	"	"	"
			201					3.85 V			"									IN_5	"	"	"
			202						3.85 V		"									IN_6	"	"	"
			203							3.85 V	"									IN_7	"	"	"
	$I_{IN(off)}$		204	25 µA							"								50 V	OUT_1		500	µA
			205		25 µA						"							50V		OUT_2		"	"
			206			25 µA					"						50 V			OUT_3		"	"
			207				25 µA				"					50 V				OUT_4		"	"
			208					25 µA			"				50 V					OUT_5		"	"
			209						25 µA		"			50 V						OUT_6		"	"
			210							25 µA	"		50 V							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$V_{IN(on)}$		211	2.6 V							0 V								200 mA	OUT_1		2.0	V
			212		2.6 V						"							200 mA		OUT_2		"	"
			213			2.6 V					"						200 mA			OUT_3		"	"
			214				2.6 V				"					200 mA				OUT_4		"	"
			215					2.6 V			"				200 mA					OUT_5		"	"
			216						2.6 V		"			200 mA						OUT_6		"	"
			217							2.6 V	"		200 mA							OUT_7		"	"
	$V_{IN(on)}$		218	2.8 V							0 V								250 mA	OUT_1		2.0	V
			219		2.8 V						"							250 mA		OUT_2		"	"
			220			2.8 V					"						250 mA			OUT_3		"	"
			221				2.8 V				"					250 mA				OUT_4		"	"
			222					2.8 V			"				250 mA					OUT_5		"	"
			223						2.8 V		"			250 mA						OUT_6		"	"
			224							2.8 V	"		250 mA							OUT_7		"	"
	$V_{IN(on)}$		225	3.0 V							0 V								300 mA	OUT_1		2.0	V
			226		3.0 V						"							300 mA		OUT_2		"	"
			227			3.0 V					"						300 mA			OUT_3		"	"
			228				3.0 V				"					300 mA				OUT_4		"	"
			229					3.0 V			"				300 mA					OUT_5		"	"
			230						3.0 V		"			300 mA						OUT_6		"	"
			231							3.0 V	"		300 mA							OUT_7		"	"
	I_R		232								"	50 V							0 V	COM		10.0	µA
			233								"	"						0V		COM		"	"
			234								"	"					0 V			COM		"	"
			235								"	"				0 V				COM		"	"
			236								"	"			0 V					COM		"	"
			237								"	"		0 V						COM		"	"
			238								"	"	0 V							COM		"	"
	V_F		239								0 V	0 V							350 mA	OUT_1		2.0	V
			240								"	"						350 mA		OUT_2		"	"
			241								"	"					350 mA			OUT_3		"	"
			242								"	"				350 mA				OUT_4		"	"
			243								"	"			350 mA					OUT_5		"	"
			244								"	"		350 mA						OUT_6		"	"
			245								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	246	IB_1							"								350 mA	IB_1-OUT_1	500		
			247		IB_2						"							350 mA		IB_2-OUT_2	"		
			248			IB_3					"						350 mA			IB_3-OUT_3	"		
			249				IB_4				"					350 mA				IB_4-OUT_4	"		
			250					IB_5			"				350 mA					IB_5-OUT_5	"		
			251						IB_6		"			350 mA						IB_6-OUT_6	"		
			252							IB_7	"		350 mA							IB_7-OUT_7	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	253	IN_1							0 V								OUT	IN_1-OUT_1		750	ns
			254		IN_2						"							OUT		IN_2-OUT_2		"	"
			255			IN_3					"						OUT			IN_3-OUT_3		"	"
			256				IN_4				"					OUT				IN_4-OUT_4		"	"
			257					IN_5			"				OUT					IN_5-OUT_5		"	"
			258						IN_6		"			OUT						IN_6-OUT_6		"	"
			259							IN_7	"		OUT							IN_7-OUT_7		"	"
	t_{PHL}	3003 Fig. 4	260	IN_1							"								OUT	IN_1-OUT_1		300	ns
			261		IN_2						"							OUT		IN_2-OUT_2		"	"
			262			IN_3					"						OUT			IN_3-OUT_3		"	"
			263				IN_4				"					OUT				IN_4-OUT_4		"	"
			264					IN_5			"				OUT					IN_5-OUT_5		"	"
			265						IN_6		"			OUT						IN_6-OUT_6		"	"
			266							IN_7	"		OUT							IN_7-OUT_7		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1								0 V							50 V	50 V	OUT_1		10.0	µA
			2								"						50 V			OUT_2		"	"
			3								"					50 V				OUT_3		"	"
			4								"				50 V					OUT_4		"	"
			5								"			50 V						OUT_5		"	"
			6								"		50 V							OUT_6		"	"
			7								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	8	500 µA							"								350 mA	OUT_1		1.6	V
			9		500 µA						"							350 mA		OUT_2		"	"
			10			500 µA					"						350 mA			OUT_3		"	"
			11				500 µA				"					350 mA				OUT_4		"	"
			12					500 µA			"				350 mA					OUT_5		"	"
			13						500 µA		"			350 mA						OUT_6		"	"
			14							500 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	15	350 µA							"								200 mA	OUT_1		1.3	V
			16		350 µA						"							200 mA		OUT_2		"	"
			17			350 µA					"						200 mA			OUT_3		"	"
			18				350 µA				"					200 mA				OUT_4		"	"
			19					350 µA			"				200 mA					OUT_5		"	"
			20						350 µA		"			200 mA						OUT_6		"	"
			21							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	22	250 µA							"								100 mA	OUT_1		1.1	V
			23		250 µA						"							100 mA		OUT_2		"	"
			24			250 µA					"						100 mA			OUT_3		"	"
			25				250 µA				"					100 mA				OUT_4		"	"
			26					250 µA			"				100 mA					OUT_5		"	"
			27						250 µA		"			100 mA						OUT_6		"	"
			28							250 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		29	5.0 V							"									IN_1	250	500	µA
			30		5.0 V						"									IN_2	"	"	"
			31			5.0 V					"									IN_3	"	"	"
			32				5.0 V				"									IN_4	"	"	"
			33					5.0 V			"									IN_5	"	"	"
			34						5.0 V		"									IN_6	"	"	"
			35							5.0 V	"									IN_7	"	"	"
	$I_{IN(on)}$		36	12.0 V							"									IN_1	750	1450	µA
			37		12.0 V						"									IN_2	"	"	"
			38			12.0 V					"									IN_3	"	"	"
			39				12.0 V				"									IN_4	"	"	"
			40					12.0 V			"									IN_5	"	"	"
			41						12.0 V		"									IN_6	"	"	"
			42							12.0 V	"									IN_7	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$I_{IN(off)}$		43	25 µA							0 V								50 V	OUT_1		500	µA
			44		25 µA						"							50V		OUT_2		"	"
			45			25 µA					"						50 V			OUT_3		"	"
			46				25 µA				"					50 V				OUT_4		"	"
			47					25 µA			"				50 V					OUT_5		"	"
			48						25 µA		"			50 V						OUT_6		"	"
			49							25 µA	"		50 V							OUT_7		"	"
	$V_{IN(on)}$		50	5.0 V							0 V								125 mA	OUT_1		2.0	V
			51		5.0 V						"							125 mA		OUT_2		"	"
			52			5.0 V					"						125 mA			OUT_3		"	"
			53				5.0 V				"					125 mA				OUT_4		"	"
			54					5.0 V			"				125 mA					OUT_5		"	"
			55						5.0 V		"			125 mA						OUT_6		"	"
			56							5.0 V	"		125 mA							OUT_7		"	"
	$V_{IN(on)}$		57	6.0 V							0 V								200 mA	OUT_1		2.0	V
			58		6.0 V						"							200 mA		OUT_2		"	"
			59			6.0 V					"						200 mA			OUT_3		"	"
			60				6.0 V				"					200 mA				OUT_4		"	"
			61					6.0 V			"				200 mA					OUT_5		"	"
			62						6.0 V		"			200 mA						OUT_6		"	"
			63							6.0 V	"		200 mA							OUT_7		"	"
	$V_{IN(on)}$		64	7.0 V							0 V								275 mA	OUT_1		2.0	V
			65		7.0 V						"							275 mA		OUT_2		"	"
			66			7.0 V					"						275 mA			OUT_3		"	"
			67				7.0 V				"					275 mA				OUT_4		"	"
			68					7.0 V			"				275 mA					OUT_5		"	"
			69						7.0 V		"			275 mA						OUT_6		"	"
			70							7.0 V	"		275 mA							OUT_7		"	"
	$V_{IN(on)}$		71	8.0 V							0 V								350 mA	OUT_1		2.0	V
			72		8.0 V						"							350 mA		OUT_2		"	"
			73			8.0 V					"						350 mA			OUT_3		"	"
			74				8.0 V				"					350 mA				OUT_4		"	"
			75					8.0 V			"				350 mA					OUT_5		"	"
			76						8.0 V		"			350 mA						OUT_6		"	"
			77							8.0 V	"		350 mA							OUT_7		"	"
	I_R		78								"	50 V							0 V	COM		10.0	µA
			79								"	"						0V		COM		"	"
			80								"	"					0 V			COM		"	"
			81								"	"				0 V				COM		"	"
			82								"	"			0 V					COM		"	"
			83								"	"		0 V						COM		"	"
			84								"	"	0 V							COM		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	V_F		85								0 V	0 V							350 mA	OUT_1		2.0	V
			86								"	"						350 mA		OUT_2		"	"
			87								"	"					350 mA			OUT_3		"	"
			88								"	"				350 mA				OUT_4		"	"
			89								"	"			350 mA					OUT_5		"	"
			90								"	"		350 mA						OUT_6		"	"
			91								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	92	IB_1							"								350 mA	IB_1-OUT_1	1000		
			93		IB_2						"							350 mA		IB_2-OUT_2	"		
			94			IB_3					"						350 mA			IB_3-OUT_3	"		
			95				IB_4				"					350 mA				IB_4-OUT_4	"		
			96					IB_5			"				350 mA					IB_5-OUT_5	"		
			97						IB_6		"			350 mA						IB_6-OUT_6	"		
			98							IB_7	"		350 mA							IB_7-OUT_7	"		
2 T_A = +125°C	I_{CEX}		99								0 V								50 V	OUT_1		10.0	µA
			100								"							50 V		OUT_2		"	"
			101								"						50 V			OUT_3		"	"
			102								"					50 V				OUT_4		"	"
			103								"				50 V					OUT_5		"	"
			104								"			50 V						OUT_6		"	"
			105								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	106	500 µA							"								350 mA	OUT_1		1.8	V
			107		500 µA						"							350 mA		OUT_2		"	"
			108			500 µA					"						350 mA			OUT_3		"	"
			109				500 µA				"					350 mA				OUT_4		"	"
			110					500 µA			"				350 mA					OUT_5		"	"
			111						500 µA		"			350 mA						OUT_6		"	"
			112							500 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	113	350 µA							"								200 mA	OUT_1		1.5	V
			114		350 µA						"							200 mA		OUT_2		"	"
			115			350 µA					"						200 mA			OUT_3		"	"
			116				350 µA				"					200 mA				OUT_4		"	"
			117					350 µA			"				200 mA					OUT_5		"	"
			118						350 µA		"			200 mA						OUT_6		"	"
			119							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	120	250 µA							"								100 mA	OUT_1		1.3	V
			121		250 µA						"							100 mA		OUT_2		"	"
			122			250 µA					"						100 mA			OUT_3		"	"
			123				250 µA				"					100 mA				OUT_4		"	"
			124					250 µA			"				100 mA					OUT_5		"	"
			125						250 µA		"			100 mA						OUT_6		"	"
			126							250 µA	"		100 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(on)}$		127	5.0 V							0 V									IN_1	250	500	µA
			128		5.0 V						"									IN_2	"	"	"
			129			5.0 V					"									IN_3	"	"	"
			130				5.0 V				"									IN_4	"	"	"
			131					5.0 V			"									IN_5	"	"	"
			132						5.0 V		"									IN_6	"	"	"
			133							5.0 V	"									IN_7	"	"	"
	$I_{IN(on)}$		134	12.0 V							"									IN_1	750	1450	µA
			135		12.0 V						"									IN_2	"	"	"
			136			12.0 V					"									IN_3	"	"	"
			137				12.0 V				"									IN_4	"	"	"
			138					12.0 V			"									IN_5	"	"	"
			139						12.0 V		"									IN_6	"	"	"
			140							12.0 V	"									IN_7	"	"	"
	$I_{IN(off)}$		141	25 µA							"								50 V	OUT_1		500	µA
			142		25 µA						"							50V		OUT_2		"	"
			143			25 µA					"						50 V			OUT_3		"	"
			144				25 µA				"					50 V				OUT_4		"	"
			145					25 µA			"				50 V					OUT_5		"	"
			146						25 µA		"			50 V						OUT_6		"	"
			147							25 µA	"		50 V							OUT_7		"	"
	$V_{IN(on)}$		148	5.0 V							0 V								125 mA	OUT_1		2.0	V
			149		5.0 V						"							125 mA		OUT_2		"	"
			150			5.0 V					"						125 mA			OUT_3		"	"
			151				5.0 V				"					125 mA				OUT_4		"	"
			152					5.0 V			"				125 mA					OUT_5		"	"
			153						5.0 V		"			125 mA						OUT_6		"	"
			154							5.0 V	"		125 mA							OUT_7		"	"
	$V_{IN(on)}$		155	6.0 V							0 V								200 mA	OUT_1		2.0	V
			156		6.0 V						"							200 mA		OUT_2		"	"
			157			6.0 V					"						200 mA			OUT_3		"	"
			158				6.0 V				"					200 mA				OUT_4		"	"
			159					6.0 V			"				200 mA					OUT_5		"	"
			160						6.0 V		"			200 mA						OUT_6		"	"
			161							6.0 V	"		200 mA							OUT_7		"	"
	$V_{IN(on)}$		162	7.0 V							0 V								275 mA	OUT_1		2.0	V
			163		7.0 V						"							275 mA		OUT_2		"	"
			164			7.0 V					"						275 mA			OUT_3		"	"
			165				7.0 V				"					275 mA				OUT_4		"	"
			166					7.0 V			"				275 mA					OUT_5		"	"
			167						7.0 V		"			275 mA						OUT_6		"	"
			168							7.0 V	"		275 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{IN(on)}$		169	8.0 V							0 V								350 mA	OUT_1		2.0	V
			170		8.0 V						"							350 mA		OUT_2		"	"
			171			8.0 V					"						350 mA			OUT_3		"	"
			172				8.0 V				"					350 mA				OUT_4		"	"
			173					8.0 V			"				350 mA					OUT_5		"	"
			174						8.0 V		"			350 mA						OUT_6		"	"
			175							8.0 V	"		350 mA							OUT_7		"	"
	I_R		176								"	50 V							0 V	COM		10.0	µA
			177								"	"						0V		COM		"	"
			178								"	"					0 V			COM		"	"
			179								"	"				0 V				COM		"	"
			180								"	"			0 V					COM		"	"
			181								"	"		0 V						COM		"	"
			182								"	"	0 V							COM		"	"
	V_F		183								0 V	0 V							350 mA	OUT_1		2.0	V
			184								"	"						350 mA		OUT_2		"	"
			185								"	"					350 mA			OUT_3		"	"
			186								"	"				350 mA				OUT_4		"	"
			187								"	"			350 mA					OUT_5		"	"
			188								"	"		350 mA						OUT_6		"	"
			189								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	190	IB_1							"								350 mA	IB_1-OUT_1	1000		
			191		IB_2						"							350 mA		IB_2-OUT_2	"		
			192			IB_3					"						350 mA			IB_3-OUT_3	"		
			193				IB_4				"					350 mA				IB_4-OUT_4	"		
			194					IB_5			"				350 mA					IB_5-OUT_5	"		
			195						IB_6		"			350 mA						IB_6-OUT_6	"		
			196							IB_7	"		350 mA							IB_7-OUT_7	"		
3 T_A = -55°C	I_{CEX}		197								0 V								50 V	OUT_1		10.0	µA
			198								"							50 V		OUT_2		"	"
			199								"						50 V			OUT_3		"	"
			200								"					50 V				OUT_4		"	"
			201								"				50 V					OUT_5		"	"
			202								"			50 V						OUT_6		"	"
			203								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	204	850 µA							"								350 mA	OUT_1		1.8	V
			205		850 µA						"							350 mA		OUT_2		"	"
			206			850 µA					"						350 mA			OUT_3		"	"
			207				850 µA				"					350 mA				OUT_4		"	"
			208					850 µA			"				350 mA					OUT_5		"	"
			209						850 µA		"			350 mA						OUT_6		"	"
			210							850 µA	"		350 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$V_{CE(sat)}$	3007	211	550 µA							0 V								200 mA	OUT_1		1.5	V
			212		550 µA						"							200 mA		OUT_2		"	"
			213			550 µA					"						200 mA			OUT_3		"	"
			214				550 µA				"					200 mA				OUT_4		"	"
			215					550 µA			"				200 mA					OUT_5		"	"
			216						550 µA		"			200 mA						OUT_6		"	"
			217							550 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	218	350 µA							"								100 mA	OUT_1		1.3	V
			219		350 µA						"							100 mA		OUT_2		"	"
			220			350 µA					"						100 mA			OUT_3		"	"
			221				350 µA				"					100 mA				OUT_4		"	"
			222					350 µA			"				100 mA					OUT_5		"	"
			223						350 µA		"			100 mA						OUT_6		"	"
			224							350 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		225	5.0 V							"									IN_1	250	500	µA
			226		5.0 V						"									IN_2	"	"	"
			227			5.0 V					"									IN_3	"	"	"
			228				5.0 V				"									IN_4	"	"	"
			229					5.0 V			"									IN_5	"	"	"
			230						5.0 V		"									IN_6	"	"	"
			231							5.0 V	"									IN_7	"	"	"
	$I_{IN(on)}$		232	12.0 V							"									IN_1	750	1450	µA
			233		12.0 V						"									IN_2	"	"	"
			234			12.0 V					"									IN_3	"	"	"
			235				12.0 V				"									IN_4	"	"	"
			236					12.0 V			"									IN_5	"	"	"
			237						12.0 V		"									IN_6	"	"	"
			238							12.0 V	"									IN_7	"	"	"
	$I_{IN(off)}$		239	25 µA							"								50 V	OUT_1		500	µA
			240		25 µA						"							50V		OUT_2		"	"
			241			25 µA					"						50 V			OUT_3		"	"
			242				25 µA				"					50 V				OUT_4		"	"
			243					25 µA			"				50 V					OUT_5		"	"
			244						25 µA		"			50 V						OUT_6		"	"
			245							25 µA	"		50 V							OUT_7		"	"
	$V_{IN(on)}$		246	6.0 V							0 V								125 mA	OUT_1		2.0	V
			247		6.0 V						"							125 mA		OUT_2		"	"
			248			6.0 V					"						125 mA			OUT_3		"	"
			249				6.0 V				"					125 mA				OUT_4		"	"
			250					6.0 V			"				125 mA					OUT_5		"	"
			251						6.0 V		"			125 mA						OUT_6		"	"
			252							6.0 V	"		125 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$V_{IN(on)}$		253	8.0 V							0 V								200 mA	OUT_1		2.0	V
			254		8.0 V						"							200 mA		OUT_2		"	"
			255			8.0 V					"						200 mA			OUT_3		"	"
			256				8.0 V				"					200 mA				OUT_4		"	"
			257					8.0 V			"				200 mA					OUT_5		"	"
			258						8.0 V		"			200 mA						OUT_6		"	"
			259							8.0 V	"		200 mA							OUT_7		"	"
	$V_{IN(on)}$		260	10.0 V							0 V								275 mA	OUT_1		2.0	V
			261		10.0 V						"							275 mA		OUT_2		"	"
			262			10.0 V					"						275 mA			OUT_3		"	"
			263				10.0 V				"					275 mA				OUT_4		"	"
			264					10.0 V			"				275 mA					OUT_5		"	"
			265						10.0 V		"			275 mA						OUT_6		"	"
			266							10.0 V	"		275 mA							OUT_7		"	"
	$V_{IN(on)}$		267	12.0 V							0 V								350 mA	OUT_1		2.0	V
			268		12.0 V						"							350 mA		OUT_2		"	"
			269			12.0 V					"						350 mA			OUT_3		"	"
			270				12.0 V				"					350 mA				OUT_4		"	"
			271					12.0 V			"				350 mA					OUT_5		"	"
			272						12.0 V		"			350 mA						OUT_6		"	"
			273							12.0 V	"		350 mA							OUT_7		"	"
	I_R		274								"	50 V								COM		10.0	µA
			275								"	"						0V		COM		"	"
			276								"	"					0 V			COM		"	"
			277								"	"				0 V				COM		"	"
			278								"	"			0 V					COM		"	"
			279								"	"		0 V						COM		"	"
			280								"	"	0 V							COM		"	"
	V_F		281								0 V	0 V							350 mA	OUT_1		2.0	V
			282								"	"						350 mA		OUT_2		"	"
			283								"	"					350 mA			OUT_3		"	"
			284								"	"				350 mA				OUT_4		"	"
			285								"	"			350 mA					OUT_5		"	"
			286								"	"		350 mA						OUT_6		"	"
			287								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	288	IB_1							"								350 mA	IB_1-OUT_1	500		
			289		IB_2						"							350 mA		IB_2-OUT_2	"		
			290			IB_3					"						350 mA			IB_3-OUT_3	"		
			291				IB_4				"					350 mA				IB_4-OUT_4	"		
			292					IB_5			"				350 mA					IB_5-OUT_5	"		
			293						IB_6		"			350 mA						IB_6-OUT_6	"		
			294							IB_7	"		350 mA							IB_7-OUT_7	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	295	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	0 V									IN_1-OUT_1		750	ns
			296								"							OUT	OUT	IN_2-OUT_2		"	"
			297								"						OUT			IN_3-OUT_3		"	"
			298								"					OUT				IN_4-OUT_4		"	"
			299								"				OUT					IN_5-OUT_5		"	"
			300								"			OUT						IN_6-OUT_6		"	"
			301								"		OUT							IN_7-OUT_7		"	"
	t_{PHL}	3003 Fig. 4	302	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	"									IN_1-OUT_1		300	ns
			303								"							OUT	OUT	IN_2-OUT_2		"	"
			304								"						OUT			IN_3-OUT_3		"	"
			305								"					OUT				IN_4-OUT_4		"	"
			306								"				OUT					IN_5-OUT_5		"	"
			307								"			OUT						IN_6-OUT_6		"	"
			308								"		OUT							IN_7-OUT_7		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1								0 V							50 V	50 V	OUT_1		10.0	µA
			2								"						50 V			OUT_2		"	"
			3								"					50 V				OUT_3		"	"
			4								"				50 V					OUT_4		"	"
			5								"			50 V						OUT_5		"	"
			6								"		50 V							OUT_6		"	"
			7								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	8	500 µA							"								350 mA	OUT_1		1.6	V
			9		500 µA						"							350 mA		OUT_2		"	"
			10			500 µA					"						350 mA			OUT_3		"	"
			11				500 µA				"					350 mA				OUT_4		"	"
			12					500 µA			"				350 mA					OUT_5		"	"
			13						500 µA		"			350 mA						OUT_6		"	"
			14							500 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	15	350 µA							"								200 mA	OUT_1		1.3	V
			16		350 µA						"							200 mA		OUT_2		"	"
			17			350 µA					"						200 mA			OUT_3		"	"
			18				350 µA				"					200 mA				OUT_4		"	"
			19					350 µA			"				200 mA					OUT_5		"	"
			20						350 µA		"			200 mA						OUT_6		"	"
			21							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	22	250 µA							"								100 mA	OUT_1		1.1	V
			23		250 µA						"							100 mA		OUT_2		"	"
			24			250 µA					"						100 mA			OUT_3		"	"
			25				250 µA				"					100 mA				OUT_4		"	"
			26					250 µA			"				100 mA					OUT_5		"	"
			27						250 µA		"			100 mA						OUT_6		"	"
			28							250 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		29	3.0 V							"									IN_1	1180	2400	µA
			30		3.0 V						"									IN_2	"	"	"
			31			3.0 V					"									IN_3	"	"	"
			32				3.0 V				"									IN_4	"	"	"
			33					3.0 V			"									IN_5	"	"	"
			34						3.0 V		"									IN_6	"	"	"
			35							3.0 V	"									IN_7	"	"	"
	$I_{IN(off)}$		36	25 µA							"								50 V	OUT_1		500	µA
			37		25 µA						"							50V		OUT_2		"	"
			38			25 µA					"						50 V			OUT_3		"	"
			39				25 µA				"					50 V				OUT_4		"	"
			40					25 µA			"				50 V					OUT_5		"	"
			41						25 µA		"			50 V						OUT_6		"	"
			42							25 µA	"		50 V							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$V_{IN(on)}$		43	2.4 V							0 V								350 mA	OUT_1		2.0	V
			44		2.4 V						"							350 mA		OUT_2		"	"
			45			2.4 V					"						350 mA			OUT_3		"	"
			46				2.4 V				"					350 mA				OUT_4		"	"
			47					2.4 V			"				350 mA					OUT_5		"	"
			48						2.4 V		"			350 mA						OUT_6		"	"
			49							2.4 V	"		350 mA							OUT_7		"	"
	I_R		50								"	50 V							0 V	COM		10.0	µA
			51								"	"						0V		COM		"	"
			52								"	"					0 V			COM		"	"
			53								"	"				0 V				COM		"	"
			54								"	"			0 V					COM		"	"
			55								"	"		0 V						COM		"	"
			56								"	"	0 V							COM		"	"
	V_F		57								0 V	0 V							350 mA	OUT_1		2.0	V
			58								"	"						350 mA		OUT_2		"	"
			59								"	"					350 mA			OUT_3		"	"
			60								"	"				350 mA				OUT_4		"	"
			61								"	"			350 mA					OUT_5		"	"
			62								"	"		350 mA						OUT_6		"	"
			63								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	64	IB_1							"								350 mA	IB_1-OUT_1	1000		
			65		IB_2						"							350 mA		IB_2-OUT_2	"		
			66			IB_3					"						350 mA			IB_3-OUT_3	"		
			67				IB_4				"					350 mA				IB_4-OUT_4	"		
			68					IB_5			"				350 mA					IB_5-OUT_5	"		
			69						IB_6		"			350 mA						IB_6-OUT_6	"		
			70							IB_7	"		350 mA							IB_7-OUT_7	"		
2 T_A = +125°C	I_{CEX}		71								0 V								50 V	OUT_1		10.0	µA
			72								"							50 V		OUT_2		"	"
			73								"						50 V			OUT_3		"	"
			74								"					50 V				OUT_4		"	"
			75								"				50 V					OUT_5		"	"
			76								"			50 V						OUT_6		"	"
			77								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	78	500 µA							"								350 mA	OUT_1		1.8	V
			79		500 µA						"							350 mA		OUT_2		"	"
			80			500 µA					"						350 mA			OUT_3		"	"
			81				500 µA				"					350 mA				OUT_4		"	"
			82					500 µA			"				350 mA					OUT_5		"	"
			83						500 µA		"			350 mA						OUT_6		"	"
			84							500 µA	"		350 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{CE(sat)}$	3007	85	350 µA							0 V								200 mA	OUT_1		1.5	V
			86		350 µA						"							200 mA		OUT_2		"	"
			87			350 µA					"						200 mA			OUT_3		"	"
			88				350 µA				"					200 mA				OUT_4		"	"
			89					350 µA			"				200 mA					OUT_5		"	"
			90						350 µA		"			200 mA						OUT_6		"	"
			91							350 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	92	250 µA							"								100 mA	OUT_1		1.3	V
			93		250 µA						"							100 mA		OUT_2		"	"
			94			250 µA					"						100 mA			OUT_3		"	"
			95				250 µA				"					100 mA				OUT_4		"	"
			96					250 µA			"				100 mA					OUT_5		"	"
			97						250 µA		"			100 mA						OUT_6		"	"
			98							250 µA	"		100 mA							OUT_7		"	"
	$I_{IN(on)}$		99	3.0 V							"									IN_1	1180	2400	µA
			100		3.0 V						"									IN_2	"	"	"
			101			3.0 V					"									IN_3	"	"	"
			102				3.0 V				"									IN_4	"	"	"
			103					3.0 V			"									IN_5	"	"	"
			104						3.0 V		"									IN_6	"	"	"
			105							3.0 V	"									IN_7	"	"	"
	$I_{IN(off)}$		106	25 µA							"								50 V	OUT_1		500	µA
			107		25 µA						"							50V		OUT_2		"	"
			108			25 µA					"						50 V			OUT_3		"	"
			109				25 µA				"					50 V				OUT_4		"	"
			110					25 µA			"				50 V					OUT_5		"	"
			111						25 µA		"			50 V						OUT_6		"	"
			112							25 µA	"		50 V							OUT_7		"	"
	$V_{IN(on)}$		113	2.4 V							0 V								350 mA	OUT_1		2.0	V
			114		2.4 V						"							350 mA		OUT_2		"	"
			115			2.4 V					"						350 mA			OUT_3		"	"
			116				2.4 V				"					350 mA				OUT_4		"	"
			117					2.4 V			"				350 mA					OUT_5		"	"
			118						2.4 V		"			350 mA						OUT_6		"	"
			119							2.4 V	"		350 mA							OUT_7		"	"
	I_R		120								"	50 V								COM		10.0	µA
			121								"	"						0V		COM		"	"
			122								"	"					0 V			COM		"	"
			123								"	"				0 V				COM		"	"
			124								"	"			0 V					COM		"	"
			125								"	"		0 V						COM		"	"
			126								"	"	0 V							COM		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	V_F		127								0 V	0 V							350 mA	OUT_1		2.0	V
			128								"	"						350 mA		OUT_2		"	"
			129								"	"					350 mA			OUT_3		"	"
			130								"	"				350 mA				OUT_4		"	"
			131								"	"			350 mA					OUT_5		"	"
			132								"	"		350 mA						OUT_6		"	"
			133								"	"	350 mA							OUT_7		"	"
	h_{FE}	3003	134	IB_1							"								350 mA	IB_1-OUT_1	1000		
			135		IB_2						"							350 mA		IB_2-OUT_2	"		
			136			IB_3					"						350 mA			IB_3-OUT_3	"		
			137				IB_4				"					350 mA				IB_4-OUT_4	"		
			318					IB_5			"				350 mA					IB_5-OUT_5	"		
			139						IB_6		"			350 mA						IB_6-OUT_6	"		
			140							IB_7	"		350 mA							IB_7-OUT_7	"		
3 T_A = -55°C	I_{CEX}		141								0 V								50 V	OUT_1		10.0	µA
			142								"							50 V		OUT_2		"	"
			143								"						50 V			OUT_3		"	"
			144								"					50 V				OUT_4		"	"
			145								"				50 V					OUT_5		"	"
			146								"			50 V						OUT_6		"	"
			147								"		50 V							OUT_7		"	"
	$V_{CE(sat)}$	3007	148	850 µA							"								350 mA	OUT_1		1.8	V
			149		850 µA						"							350 mA		OUT_2		"	"
			150			850 µA					"						350 mA			OUT_3		"	"
			151				850 µA				"					350 mA				OUT_4		"	"
			152					850 µA			"				350 mA					OUT_5		"	"
			153						850 µA		"			350 mA						OUT_6		"	"
			154							850 µA	"		350 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	155	550 µA							"								200 mA	OUT_1		1.5	V
			156		550 µA						"							200 mA		OUT_2		"	"
			157			550 µA					"						200 mA			OUT_3		"	"
			158				550 µA				"					200 mA				OUT_4		"	"
			159					550 µA			"				200 mA					OUT_5		"	"
			160						550 µA		"			200 mA						OUT_6		"	"
			161							550 µA	"		200 mA							OUT_7		"	"
	$V_{CE(sat)}$	3007	162	350 µA							"								100 mA	OUT_1		1.3	V
			163		350 µA						"							100 mA		OUT_2		"	"
			164			350 µA					"						100 mA			OUT_3		"	"
			165				350 µA				"					100 mA				OUT_4		"	"
			166					350 µA			"				100 mA					OUT_5		"	"
			167						350 µA		"			100 mA						OUT_6		"	"
			168							350 µA	"		100 mA							OUT_7		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$I_{IN(on)}$		169	3.0 V							0 V									IN_1	1180	2400	µA
			170		3.0 V						“									IN_2	“	“	“
			171			3.0 V					“									IN_3	“	“	“
			172				3.0 V				“									IN_4	“	“	“
			173					3.0 V			“									IN_5	“	“	“
			174						3.0 V		“									IN_6	“	“	“
			175							3.0 V	“									IN_7	“	“	“
	$I_{IN(off)}$		176	25 µA							“								50 V	OUT_1		500	µA
			177		25 µA						“							50V		OUT_2		“	“
			178			25 µA					“						50 V			OUT_3		“	“
			179				25 µA				“					50 V				OUT_4		“	“
			180					25 µA			“				50 V					OUT_5		“	“
			181						25 µA		“			50 V						OUT_6		“	“
			182							25 µA	“		50 V							OUT_7		“	“
	$V_{IN(on)}$		183	3.0 V							0 V								350 mA	OUT_1		2.0	V
			184		3.0 V						“							350 mA		OUT_2		“	“
			185			3.0 V					“						350 mA			OUT_3		“	“
			186				3.0 V				“					350 mA				OUT_4		“	“
			187					3.0 V			“				350 mA					OUT_5		“	“
			188						3.0 V		“			350 mA						OUT_6		“	“
			189							3.0 V	“		350 mA							OUT_7		“	“
	I_R		190								“	50 V							0 V	COM		10.0	µA
			191								“	“						0V		COM		“	“
			192								“	“					0 V			COM		“	“
			193								“	“				0 V				COM		“	“
			194								“	“			0 V					COM		“	“
			195								“	“		0 V						COM		“	“
			196								“	“	0 V							COM		“	“
	V_F		197								0 V	0 V							350 mA	OUT_1		2.0	V
			198								“	“						350 mA		OUT_2		“	“
			199								“	“					350 mA			OUT_3		“	“
			200								“	“				350 mA				OUT_4		“	“
			201								“	“			350 mA					OUT_5		“	“
			202								“	“		350 mA						OUT_6		“	“
			203								“	“	350 mA							OUT_7		“	“
	h_{FE}	3003	204	IB_1							“								350 mA	IB_1-OUT_1	500		
			205		IB_2						“							350 mA		IB_2-OUT_2	“		
			206			IB_3					“						350 mA			IB_3-OUT_3	“		
			207				IB_4				“					350 mA				IB_4-OUT_4	“		
			208					IB_5			“				350 mA					IB_5-OUT_5	“		
			209						IB_6		“			350 mA						IB_6-OUT_6	“		
			210							IB_7	“		350 mA							IB_7-OUT_7	“		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation															Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	GND	COM	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	211	IN_1							0 V								OUT	IN_1-OUT_1		750	ns
			212		IN_2						"							OUT		IN_2-OUT_2		"	"
			213			IN_3					"						OUT			IN_3-OUT_3		"	"
			214				IN_4				"					OUT				IN_4-OUT_4		"	"
			215					IN_5			"				OUT					IN_5-OUT_5		"	"
			216						IN_6		"			OUT						IN_6-OUT_6		"	"
			217							IN_7	"		OUT							IN_7-OUT_7		"	"
	t_{PHL}	3003 Fig. 4	218	IN_1							"								OUT	IN_1-OUT_1		300	ns
			219		IN_2						"							OUT		IN_2-OUT_2		"	"
			220			IN_3					"						OUT			IN_3-OUT_3		"	"
			221				IN_4				"					OUT				IN_4-OUT_4		"	"
			222					IN_5			"				OUT					IN_5-OUT_5		"	"
			223						IN_6		"			OUT						IN_6-OUT_6		"	"
			224							IN_7	"		OUT							IN_7-OUT_7		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1									0 V									50 V	OUT_1		10.0	µA
			2									"								50 V		OUT_2		"	"
			3									"							50 V			OUT_3		"	"
			4									"						50 V				OUT_4		"	"
			5									"					50 V					OUT_5		"	"
			6									"				50 V						OUT_6		"	"
			7									"			50 V							OUT_7		"	"
			8									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	9	500 µA								"									350 mA	OUT_1		1.6	V
			10		500 µA							"								350 mA		OUT_2		"	"
			11			500 µA						"							350 mA			OUT_3		"	"
			12				500 µA					"						350 mA				OUT_4		"	"
			13					500 µA				"					350 mA					OUT_5		"	"
			14						500 µA			"				350 mA						OUT_6		"	"
			15							500 µA		"			350 mA							OUT_7		"	"
			16								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	17	350 µA								"									200 mA	OUT_1		1.3	V
			18		350 µA							"								200 mA		OUT_2		"	"
			19			350 µA						"							200 mA			OUT_3		"	"
			20				350 µA					"						200 mA				OUT_4		"	"
			21					350 µA				"					200 mA					OUT_5		"	"
			22						350 µA			"				200 mA						OUT_6		"	"
			23							350 µA		"			200 mA							OUT_7		"	"
			24								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	25	250 µA								"									100 mA	OUT_1		1.1	V
			26		250 µA							"								100 mA		OUT_2		"	"
			27			250 µA						"							100 mA			OUT_3		"	"
			28				250 µA					"						100 mA				OUT_4		"	"
			29					250 µA				"					100 mA					OUT_5		"	"
			30						250 µA			"				100 mA						OUT_6		"	"
			31							250 µA		"			100 mA							OUT_7		"	"
			32								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(off)}$		33	25 µA								"									50 V	OUT_1		500	µA
			34		25 µA							"								50V		OUT_2		"	"
			35			25 µA						"							50 V			OUT_3		"	"
			36				25 µA					"						50 V				OUT_4		"	"
			37					25 µA				"					50 V					OUT_5		"	"
			38						25 µA			"				50 V						OUT_6		"	"
			39							25 µA		"			50 V							OUT_7		"	"
			40								25 µA	"		50 V								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_R		41									0 V	50 V								0 V	COM		10.0	µA
			42									“	“							0 V		COM		“	“
			43									“	“						0 V			COM		“	“
			44									“	“					0 V				COM		“	“
			45									“	“				0 V					COM		“	“
			46									“	“			0 V						COM		“	“
			47									“	“		0 V							COM		“	“
			48									“	“	0 V								COM		“	“
	V_F		49									“	0 V								350 mA	OUT_1		2.0	V
			50									“	“							350 mA		OUT_2		“	“
			51									“	“						350 mA			OUT_3		“	“
			52									“	“					350 mA				OUT_4		“	“
			53									“	“				350 mA					OUT_5		“	“
			54									“	“			350 mA						OUT_6		“	“
			55									“	“		350 mA							OUT_7		“	“
			56									“	“	350 mA								OUT_8		“	“
	h_{FE}	3003	57	IB_1								“	0 V								350 mA	IB_1-OUT_1	1000		
			58		IB_2							“	“							350 mA		IB_2-OUT_2	“		
			59			IB_3						“	“						350 mA			IB_3-OUT_3	“		
			60				IB_4					“	“					350 mA				IB_4-OUT_4	“		
			61					IB_5				“	“				350 mA					IB_5-OUT_5	“		
			62						IB_6			“	“			350 mA						IB_6-OUT_6	“		
			63							IB_7		“	“		350 mA							IB_7-OUT_7	“		
			64								IB_8	“	“	350 mA								IB_8-OUT_8	“		
2 T_A = +125°C	I_{CEX}		65									0 V									50 V	OUT_1		10.0	µA
			66									“								50 V		OUT_2		“	“
			67									“							50 V			OUT_3		“	“
			68									“						50 V				OUT_4		“	“
			69									“					50 V					OUT_5		“	“
			70									“				50 V						OUT_6		“	“
			71									“			50 V							OUT_7		“	“
			72									“		50 V								OUT_8		“	“
	$V_{CE(sat)}$	3007	73	500 µA								“									350 mA	OUT_1		1.8	V
			74		500 µA							“								350 mA		OUT_2		“	“
			75			500 µA						“							350 mA			OUT_3		“	“
			76				500 µA					“						350 mA				OUT_4		“	“
			77					500 µA				“					350 mA					OUT_5		“	“
			78						500 µA			“				350 mA						OUT_6		“	“
			79							500 µA		“			350 mA							OUT_7		“	“
			80								500 µA	“		350 mA								OUT_8		“	“

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{CE(sat)}$	3007	81	350 µA								0 V									200 mA	OUT_1		1.5	V
			82		350 µA							"								200 mA		OUT_2		"	"
			83			350 µA						"							200 mA			OUT_3		"	"
			84				350 µA					"						200 mA				OUT_4		"	"
			85					350 µA				"					200 mA					OUT_5		"	"
			86						350 µA			"				200 mA						OUT_6		"	"
			87							350 µA		"			200 mA							OUT_7		"	"
			88								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	89	250 µA								"									100 mA	OUT_1		1.3	V
			90		250 µA							"								100 mA		OUT_2		"	"
			91			250 µA						"							100 mA			OUT_3		"	"
			92				250 µA					"						100 mA				OUT_4		"	"
			93					250 µA				"					100 mA					OUT_5		"	"
			94						250 µA			"				100 mA						OUT_6		"	"
			95							250 µA		"			100 mA							OUT_7		"	"
			96								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(off)}$		97	25 µA								"									50 V	OUT_1		500	µA
			98		25 µA							"								50V		OUT_2		"	"
			99			25 µA						"							50 V			OUT_3		"	"
			100				25 µA					"						50 V				OUT_4		"	"
			101					25 µA				"					50 V					OUT_5		"	"
			102						25 µA			"				50 V						OUT_6		"	"
			103							25 µA		"			50 V							OUT_7		"	"
			104								25 µA	"		50 V								OUT_8		"	"
	I_R		105									0 V	50 V								0 V	COM		10.0	µA
			106									"	"							0 V		COM		"	"
			107									"	"						0 V			COM		"	"
			108									"	"					0 V				COM		"	"
			109									"	"				0 V					COM		"	"
			110									"	"			0 V						COM		"	"
			111									"	"		0 V							COM		"	"
			112									"		0 V								COM		"	"
	V_F		113									"	0 V								350 mA	OUT_1		2.0	V
			114									"	"							350 mA		OUT_2		"	"
			115									"	"						350 mA			OUT_3		"	"
			116									"	"					350 mA				OUT_4		"	"
			117									"	"				350 mA					OUT_5		"	"
			118									"	"			350 mA						OUT_6		"	"
			119									"	"		350 mA							OUT_7		"	"
			120									"	"	350 mA								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	h_{FE}	3003	121	IB_1								0 V	0 V								350 mA	IB_1-OUT_1	1000		
			122		IB_2							"	"							350 mA		IB_2-OUT_2	"		
			123			IB_3						"	"						350 mA			IB_3-OUT_3	"		
			124				IB_4					"	"					350 mA				IB_4-OUT_4	"		
			125					IB_5				"	"				350 mA					IB_5-OUT_5	"		
			126						IB_6			"	"			350 mA						IB_6-OUT_6	"		
			127							IB_7		"	"		350 mA							IB_7-OUT_7	"		
			128								IB_8	"	"	350 mA								IB_8-OUT_8	"		
3 T_A = -55°C	I_{CEX}		129									0 V									50 V	OUT_1		10.0	µA
			130									"								50 V		OUT_2		"	"
			131									"							50 V			OUT_3		"	"
			132									"						50 V				OUT_4		"	"
			133									"					50 V					OUT_5		"	"
			134									"				50 V						OUT_6		"	"
			135									"			50 V							OUT_7		"	"
			136									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	137	850 µA								"									350 mA	OUT_1		1.8	V
			138		850 µA							"								350 mA		OUT_2		"	"
			139			850 µA						"							350 mA			OUT_3		"	"
			140				850 µA					"						350 mA				OUT_4		"	"
			141					850 µA				"					350 mA					OUT_5		"	"
			142						850 µA			"				350 mA						OUT_6		"	"
			143							850 µA		"			350 mA							OUT_7		"	"
			144								850 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	145	550 µA								"									200 mA	OUT_1		1.5	V
			146		550 µA							"								200 mA		OUT_2		"	"
			147			550 µA						"							200 mA			OUT_3		"	"
			148				550 µA					"						200 mA				OUT_4		"	"
			149					550 µA				"					200 mA					OUT_5		"	"
			150						550 µA			"				200 mA						OUT_6		"	"
			151							550 µA		"			200 mA							OUT_7		"	"
			152								550 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	153	350 µA								"									100 mA	OUT_1		1.3	V
			154		350 µA							"								100 mA		OUT_2		"	"
			155			350 µA						"							100 mA			OUT_3		"	"
			156				350 µA					"						100 mA				OUT_4		"	"
			157					350 µA				"					100 mA					OUT_5		"	"
			158						350 µA			"				100 mA						OUT_6		"	"
			159							350 µA		"			100 mA							OUT_7		"	"
			160								350 µA	"		100 mA								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$I_{IN(off)}$		161	25 µA								0 V									50 V	OUT_1		500	µA
			162		25 µA							"								50V		OUT_2		"	"
			163			25 µA						"							50 V			OUT_3		"	"
			164				25 µA					"						50 V				OUT_4		"	"
			165					25 µA				"					50 V					OUT_5		"	"
			166						25 µA			"				50 V						OUT_6		"	"
			167							25 µA		"			50 V							OUT_7		"	"
			168								25 µA	"		50 V								OUT_8		"	"
	I_R		169									0 V	50 V									COM		10.0	µA
			170									"	"							0 V	0 V	COM		"	"
			171									"	"						0 V			COM		"	"
			172									"	"					0 V				COM		"	"
			173									"	"				0 V					COM		"	"
			174									"	"			0 V						COM		"	"
			175									"	"		0 V							COM		"	"
			176									"	"	0 V								COM		"	"
	V_F		177									"	0 V								350 mA	OUT_1		2.0	V
			178									"	"							350 mA		OUT_2		"	"
			179									"	"						350 mA			OUT_3		"	"
			180									"	"					350 mA				OUT_4		"	"
			181									"	"				350 mA					OUT_5		"	"
			182									"	"			350 mA						OUT_6		"	"
			183									"	"		350 mA							OUT_7		"	"
			184									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	185	IB_1								"	0 V								350 mA	IB_1-OUT_1	500		
			186		IB_2							"	"							350 mA		IB_2-OUT_2	"		
			187			IB_3						"	"						350 mA			IB_3-OUT_3	"		
			188				IB_4					"	"					350 mA				IB_4-OUT_4	"		
			189					IB_5				"	"				350 mA					IB_5-OUT_5	"		
			190						IB_6			"	"			350 mA						IB_6-OUT_6	"		
			191							IB_7		"	"		350 mA							IB_7-OUT_7	"		
			192								IB_8	"	"	350 mA								IB_8-OUT_8	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	193	IN_1								0 V									OUT	IB_1-OUT_1		750	ns
			194		IN_2							"								OUT		IB_2-OUT_2		"	"
			195			IN_3						"							OUT			IB_3-OUT_3		"	"
			196				IN_4					"						OUT				IB_4-OUT_4		"	"
			197					IN_5				"					OUT					IB_5-OUT_5		"	"
			198						IN_6			"				OUT						IB_6-OUT_6		"	"
			199							IN_7		"			OUT							IB_7-OUT_7		"	"
			200								IN_8	"		OUT								IB_8-OUT_8		"	"
	t_{PHL}	3003 Fig. 4	201	IN_1								"									OUT	IB_1-OUT_1		300	ns
			202		IN_2							"								OUT		IB_2-OUT_2		"	"
			203			IN_3						"							OUT			IB_3-OUT_3		"	"
			204				IN_4					"						OUT				IB_4-OUT_4		"	"
			205					IN_5				"					OUT					IB_5-OUT_5		"	"
			206						IN_6			"				OUT						IB_6-OUT_6		"	"
			207							IN_7		"			OUT							IB_7-OUT_7		"	"
			208								IN_8	"		OUT								IB_8-OUT_8		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1									0 V									50 V	OUT_1		10.0	µA
			2									"								50 V		OUT_2		"	"
			3									"							50 V			OUT_3		"	"
			4									"						50 V				OUT_4		"	"
			5									"					50 V					OUT_5		"	"
			6									"				50 V						OUT_6		"	"
			7									"			50 V							OUT_7		"	"
			8									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	9	500 µA								"									350 mA	OUT_1		1.6	V
			10		500 µA							"								350 mA		OUT_2		"	"
			11			500 µA						"							350 mA			OUT_3		"	"
			12				500 µA					"						350 mA				OUT_4		"	"
			13					500 µA				"					350 mA					OUT_5		"	"
			14						500 µA			"				350 mA						OUT_6		"	"
			15							500 µA		"			350 mA							OUT_7		"	"
			16								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	17	350 µA								"									200 mA	OUT_1		1.3	V
			18		350 µA							"								200 mA		OUT_2		"	"
			19			350 µA						"							200 mA			OUT_3		"	"
			20				350 µA					"						200 mA				OUT_4		"	"
			21					350 µA				"					200 mA					OUT_5		"	"
			22						350 µA			"				200 mA						OUT_6		"	"
			23							350 µA		"			200 mA							OUT_7		"	"
			24								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	25	250 µA								"									100 mA	OUT_1		1.1	V
			26		250 µA							"								100 mA		OUT_2		"	"
			27			250 µA						"							100 mA			OUT_3		"	"
			28				250 µA					"						100 mA				OUT_4		"	"
			29					250 µA				"					100 mA					OUT_5		"	"
			30						250 µA			"				100 mA						OUT_6		"	"
			31							250 µA		"			100 mA							OUT_7		"	"
			32								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		33	17 V								"										IN_1	575	1300	µA
			34		17 V							"										IN_2	"	"	"
			35			17 V						"										IN_3	"	"	"
			36				17 V					"										IN_4	"	"	"
			37					17 V				"										IN_5	"	"	"
			38						17 V			"										IN_6	"	"	"
			39							17 V		"										IN_7	"	"	"
			40								17 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$I_{IN(off)}$		41	25 µA								0 V									50 V	OUT_1		500	µA
			42		25 µA							"								50V		OUT_2		"	"
			43			25 µA						"							50 V			OUT_3		"	"
			44				25 µA					"						50 V				OUT_4		"	"
			45					25 µA				"					50 V					OUT_5		"	"
			46						25 µA			"				50 V						OUT_6		"	"
			47							25 µA		"			50 V							OUT_7		"	"
			48								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		49	13 V								0 V	50 V								300 mA	OUT_1		2.0	V
			50		13 V							"	"							300 mA		OUT_2		"	"
			51			13 V						"	"						300 mA			OUT_3		"	"
			52				13 V					"	"					300 mA				OUT_4		"	"
			53					13 V				"	"				300 mA					OUT_5		"	"
			54						13 V			"	"			300 mA						OUT_6		"	"
			55							13 V		"	"		300 mA							OUT_7		"	"
			56								13 V	"		300 mA								OUT_8		"	"
	I_R		57									0 V	50 V								0 V	COM		10.0	µA
			58									"	"							0 V		COM		"	"
			59									"	"						0 V			COM		"	"
			60									"	"					0 V				COM		"	"
			61									"	"				0 V					COM		"	"
			62									"	"			0 V						COM		"	"
			63									"	"		0 V							COM		"	"
			64									"		0 V								COM		"	"
	V_F		65									"	0 V								350 mA	OUT_1		2.0	V
			66									"	"							350 mA		OUT_2		"	"
			67									"	"						350 mA			OUT_3		"	"
			68									"	"					350 mA				OUT_4		"	"
			69									"	"				350 mA					OUT_5		"	"
			70									"	"			350 mA						OUT_6		"	"
			71									"	"		350 mA							OUT_7		"	"
			72									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	73	IB_1								"	0 V								350 mA	IB_1-OUT_1	1000		
			74		IB_2							"	"							350 mA		IB_2-OUT_2	"		
			75			IB_3						"	"						350 mA			IB_3-OUT_3	"		
			76				IB_4					"	"					350 mA				IB_4-OUT_4	"		
			77					IB_5				"	"				350 mA					IB_5-OUT_5	"		
			78						IB_6			"	"			350 mA						IB_6-OUT_6	"		
			79							IB_7		"	"		350 mA							IB_7-OUT_7	"		
			80								IB_8	"	"	350 mA								IB_8-OUT_8	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	I_{CEX}		81									0 V									50 V	OUT_1		10.0	µA
			82									"								50 V		OUT_2		"	"
			83									"							50 V			OUT_3		"	"
			84									"						50 V				OUT_4		"	"
			85									"					50 V					OUT_5		"	"
			86									"				50 V						OUT_6		"	"
			87									"			50 V							OUT_7		"	"
			88									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	89	500 µA								"								350 mA		OUT_1		1.8	V
			90		500 µA							"										OUT_2		"	"
			91			500 µA						"							350 mA			OUT_3		"	"
			92				500 µA					"						350 mA				OUT_4		"	"
			93					500 µA				"					350 mA					OUT_5		"	"
			94						500 µA			"				350 mA						OUT_6		"	"
			95							500 µA		"			350 mA							OUT_7		"	"
			96								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	97	350 µA								"								200 mA		OUT_1		1.5	V
			98		350 µA							"										OUT_2		"	"
			99			350 µA						"							200 mA			OUT_3		"	"
			100				350 µA					"						200 mA				OUT_4		"	"
			101					350 µA				"					200 mA					OUT_5		"	"
			102						350 µA			"				200 mA						OUT_6		"	"
			103							350 µA		"			200 mA							OUT_7		"	"
			104								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	105	250 µA								"								100 mA		OUT_1		1.3	V
			106		250 µA							"										OUT_2		"	"
			107			250 µA						"							100 mA			OUT_3		"	"
			108				250 µA					"						100 mA				OUT_4		"	"
			109					250 µA				"					100 mA					OUT_5		"	"
			110						250 µA			"				100 mA						OUT_6		"	"
			111							250 µA		"			100 mA							OUT_7		"	"
			112								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		113	17 V								"										IN_1	575	1300	µA
			114		17 V							"										IN_2	"	"	"
			115			17 V						"										IN_3	"	"	"
			116				17 V					"										IN_4	"	"	"
			117					17 V				"										IN_5	"	"	"
			118						17 V			"										IN_6	"	"	"
			119							17 V		"										IN_7	"	"	"
			120								17 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(off)}$		121	25 µA								0 V									50 V	OUT_1		500	µA
			122		25 µA							"								50V		OUT_2		"	"
			123			25 µA						"							50 V			OUT_3		"	"
			124				25 µA					"						50 V				OUT_4		"	"
			125					25 µA				"					50 V					OUT_5		"	"
			126						25 µA			"				50 V						OUT_6		"	"
			127							25 µA		"			50 V							OUT_7		"	"
			128								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		129	13 V								0 V									300 mA	OUT_1		2.0	V
			130		13 V							"								300 mA		OUT_2		"	"
			131			13 V						"							300 mA			OUT_3		"	"
			132				13 V					"						300 mA				OUT_4		"	"
			133					13 V				"					300 mA					OUT_5		"	"
			134						13 V			"				300 mA						OUT_6		"	"
			135							13 V		"			300 mA							OUT_7		"	"
			136								13 V	"		300 mA								OUT_8		"	"
	I_R		137									0 V	50 V								0 V	COM		10.0	µA
			138									"	"							0 V		COM		"	"
			139									"	"						0 V			COM		"	"
			140									"	"					0 V				COM		"	"
			141									"	"				0 V					COM		"	"
			142									"	"			0 V						COM		"	"
			143									"	"		0 V							COM		"	"
			144									"	"	0 V								COM		"	"
	V_F		145									"	0 V								350 mA	OUT_1		2.0	V
			146									"	"							350 mA		OUT_2		"	"
			147									"	"						350 mA			OUT_3		"	"
			148									"	"					350 mA				OUT_4		"	"
			149									"	"				350 mA					OUT_5		"	"
			150									"	"			350 mA						OUT_6		"	"
			151									"	"		350 mA							OUT_7		"	"
			152									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	153	IB_1								"	0 V								350 mA	IN_1-OUT_1	1000		
			154		IB_2							"	"							350 mA		IN_2-OUT_2	"		
			155			IB_3						"	"						350 mA			IN_3-OUT_3	"		
			156				IB_4					"	"					350 mA				IN_4-OUT_4	"		
			157					IB_5				"	"				350 mA					IN_5-OUT_5	"		
			158						IB_6			"	"			350 mA						IN_6-OUT_6	"		
			159							IB_7		"	"		350 mA							IN_7-OUT_7	"		
			160								IB_8	"	"	350 mA								IN_8-OUT_8	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	I_{CEX}		161									0 V									50 V	OUT_1		10.0	µA
			162									"								50 V		OUT_2		"	"
			163									"							50 V			OUT_3		"	"
			164									"						50 V				OUT_4		"	"
			165									"					50 V					OUT_5		"	"
			166									"				50 V						OUT_6		"	"
			167									"			50 V							OUT_7		"	"
			168									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	169	850 µA								"									350 mA	OUT_1		1.8	V
			170		850 µA							"								350 mA		OUT_2		"	"
			171			850 µA						"							350 mA			OUT_3		"	"
			172				850 µA					"						350 mA				OUT_4		"	"
			173					850 µA				"					350 mA					OUT_5		"	"
			174						850 µA			"				350 mA						OUT_6		"	"
			175							850 µA		"			350 mA							OUT_7		"	"
			176								850 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	177	550 µA								"									200 mA	OUT_1		1.5	V
			178		550 µA							"								200 mA		OUT_2		"	"
			179			550 µA						"							200 mA			OUT_3		"	"
			180				550 µA					"						200 mA				OUT_4		"	"
			181					550 µA				"					200 mA					OUT_5		"	"
			182						550 µA			"				200 mA						OUT_6		"	"
			183							550 µA		"			200 mA							OUT_7		"	"
			184								550 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	185	350 µA								"									100 mA	OUT_1		1.3	V
			186		350 µA							"								100 mA		OUT_2		"	"
			187			350 µA						"							100 mA			OUT_3		"	"
			188				350 µA					"						100 mA				OUT_4		"	"
			189					350 µA				"					100 mA					OUT_5		"	"
			190						350 µA			"				100 mA						OUT_6		"	"
			191							350 µA		"			100 mA							OUT_7		"	"
			192								350 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		193	17 V								"										IN_1	575	1300	µA
			194		17 V							"										IN_2	"	"	"
			195			17 V						"										IN_3	"	"	"
			196				17 V					"										IN_4	"	"	"
			197					17 V				"										IN_5	"	"	"
			198						17 V			"										IN_6	"	"	"
			199							17 V		"										IN_7	"	"	"
			200								17 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$I_{IN(off)}$		201	25 µA								0 V									50 V	OUT_1		500	µA
			202		25 µA							“								50V		OUT_2		“	“
			203			25 µA						“							50 V			OUT_3		“	“
			204				25 µA					“						50 V				OUT_4		“	“
			205					25 µA				“					50 V					OUT_5		“	“
			206						25 µA			“				50 V						OUT_6		“	“
			207							25 µA		“			50 V							OUT_7		“	“
			208								25 µA	“		50 V								OUT_8		“	“
	$V_{IN(on)}$		209	18 V								0 V									300 mA	OUT_1		2.0	V
			210		18 V							“								300 mA		OUT_2		“	“
			211			18 V						“							300 mA			OUT_3		“	“
			212				18 V					“						300 mA				OUT_4		“	“
			213					18 V				“					300 mA					OUT_5		“	“
			214						18 V			“				300 mA						OUT_6		“	“
			215							18 V		“			300 mA							OUT_7		“	“
			216								18 V	“		300 mA								OUT_8		“	“
	I_R		217									0 V	50 V								0 V	COM		10.0	µA
			218									“	“							0 V		COM		“	“
			219									“	“						0 V			COM		“	“
			220									“	“					0 V				COM		“	“
			221									“	“				0 V					COM		“	“
			222									“	“			0 V						COM		“	“
			223									“	“		0 V							COM		“	“
			224									“	“	0 V								COM		“	“
	V_F		225									“	0 V								350 mA	OUT_1		2.0	V
			226									“	“							350 mA		OUT_2		“	“
			227									“	“						350 mA			OUT_3		“	“
			228									“	“					350 mA				OUT_4		“	“
			229									“	“				350 mA					OUT_5		“	“
			230									“	“			350 mA						OUT_6		“	“
			231									“	“		350 mA							OUT_7		“	“
			232									“	“	350 mA								OUT_8		“	“
	h_{FE}	3003	233	IB_1								“	0 V								350 mA	IB_1-OUT_1	500		
			234		IB_2							“	“							350 mA		IB_2-OUT_2	“		
			235			IB_3						“	“						350 mA			IB_3-OUT_3	“		
			236				IB_4					“	“					350 mA				B_4-OUT_4	“		
			237					IB_5				“	“				350 mA					IB_5-OUT_5	“		
			238						IB_6			“	“			350 mA						IB_6-OUT_6	“		
			239							IB_7		“	“		350 mA							IB_7-OUT_7	“		
			240								IB_8	“	“	350 mA								IB_8-OUT_8	“		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	241	IN_1								0 V									OUT	IN_1-OUT_1		750	ns
			242		IN_2							"								OUT		IN_2-OUT_2		"	"
			243			IN_3						"							OUT			IN_3-OUT_3		"	"
			244				IN_4					"						OUT				IN_4-OUT_4		"	"
			245					IN_5				"					OUT					IN_5-OUT_5		"	"
			246						IN_6			"				OUT						IN_6-OUT_6		"	"
			247							IN_7		"			OUT							IN_7-OUT_7		"	"
			248								IN_8	"		OUT								IN_8-OUT_8		"	"
	t_{PHL}	3003 Fig. 4	249	IN_1								"									OUT	IN_1-OUT_1		300	ns
			250		IN_2							"								OUT		IN_2-OUT_2		"	"
			251			IN_3						"							OUT			IN_3-OUT_3		"	"
			252				IN_4					"						OUT				IN_4-OUT_4		"	"
			253					IN_5				"					OUT					IN_5-OUT_5		"	"
			254						IN_6			"				OUT						IN_6-OUT_6		"	"
			255							IN_7		"			OUT							IN_7-OUT_7		"	"
			256								IN_8	"		OUT								IN_8-OUT_8		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1									0 V									50 V	OUT_1		10.0	µA
			2									"								50 V		OUT_2		"	"
			3									"							50 V			OUT_3		"	"
			4									"						50 V				OUT_4		"	"
			5									"					50 V					OUT_5		"	"
			6									"				50 V						OUT_6		"	"
			7									"			50 V							OUT_7		"	"
			8									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	9	500 µA								"									350 mA	OUT_1		1.6	V
			10		500 µA							"								350 mA		OUT_2		"	"
			11			500 µA						"							350 mA			OUT_3		"	"
			12				500 µA					"						350 mA				OUT_4		"	"
			13					500 µA				"					350 mA					OUT_5		"	"
			14						500 µA			"				350 mA						OUT_6		"	"
			15							500 µA		"			350 mA							OUT_7		"	"
			16								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	17	350 µA								"									200 mA	OUT_1		1.3	V
			18		350 µA							"								200 mA		OUT_2		"	"
			19			350 µA						"							200 mA			OUT_3		"	"
			20				350 µA					"						200 mA				OUT_4		"	"
			21					350 µA				"					200 mA					OUT_5		"	"
			22						350 µA			"				200 mA						OUT_6		"	"
			23							350 µA		"			200 mA							OUT_7		"	"
			24								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	25	250 µA								"									100 mA	OUT_1		1.1	V
			26		250 µA							"								100 mA		OUT_2		"	"
			27			250 µA						"							100 mA			OUT_3		"	"
			28				250 µA					"						100 mA				OUT_4		"	"
			29					250 µA				"					100 mA					OUT_5		"	"
			30						250 µA			"				100 mA						OUT_6		"	"
			31							250 µA		"			100 mA							OUT_7		"	"
			32								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		33	3.85 V								"										IN_1	650	1350	µA
			34		3.85 V							"										IN_2	"	"	"
			35			3,85 V						"										IN_3	"	"	"
			36				3.85 V					"										IN_4	"	"	"
			37					3.85 V				"										IN_5	"	"	"
			38						3.85 V			"										IN_6	"	"	"
			39							3.85 V		"										IN_7	"	"	"
			40								3.85 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$I_{IN(off)}$		41	25 µA								0 V									50 V	OUT_1		500	µA
			42		25 µA							"								50V		OUT_2		"	"
			43			25 µA						"							50 V			OUT_3		"	"
			44				25 µA					"						50 V				OUT_4		"	"
			45					25 µA				"					50 V					OUT_5		"	"
			46						25 µA			"				50 V						OUT_6		"	"
			47							25 µA		"			50 V							OUT_7		"	"
			48								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		49	2.0 V								0 V									200 mA	OUT_1		2.0	V
			50		2.0 V							"								200 mA		OUT_2		"	"
			51			2.0 V						"							200 mA			OUT_3		"	"
			52				2.0 V					"						200 mA				OUT_4		"	"
			53					2.0 V				"					200 mA					OUT_5		"	"
			54						2.0 V			"				200 mA						OUT_6		"	"
			55							2.0 V		"			200 mA							OUT_7		"	"
			56								2.0 V	"		200 mA								OUT_8		"	"
	$V_{IN(on)}$		57	2.2 V								0 V									250 mA	OUT_1		2.0	V
			58		2.2 V							"								250 mA		OUT_2		"	"
			59			2.2 V						"							250 mA			OUT_3		"	"
			60				2.2 V					"						250 mA				OUT_4		"	"
			61					2.2 V				"					250 mA					OUT_5		"	"
			62						2.2 V			"				250 mA						OUT_6		"	"
			63							2.2 V		"			250 mA							OUT_7		"	"
			64								2.2 V	"		250 mA								OUT_8		"	"
	$V_{IN(on)}$		65	2.4 V								0 V									300 mA	OUT_1		2.0	V
			66		2.4 V							"								300 mA		OUT_2		"	"
			67			2.4 V						"							300 mA			OUT_3		"	"
			68				2.4 V					"						300 mA				OUT_4		"	"
			69					2.4 V				"					300 mA					OUT_5		"	"
			70						2.4 V			"				300 mA						OUT_6		"	"
			71							2.4 V		"			300 mA							OUT_7		"	"
			72								2.4 V	"		300 mA								OUT_8		"	"
	I_R		73									0 V	50 V								0 V	COM		10.0	µA
			74									"	"							0 V		COM		"	"
			75									"	"						0 V			COM		"	"
			76									"	"					0 V				COM		"	"
			77									"	"				0 V					COM		"	"
			78									"	"			0 V						COM		"	"
			79									"	"		0 V							COM		"	"
			80									"	"	0 V								COM		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	V_F		81									0 V	0 V								350 mA	OUT_1		2.0	V
			82									"	"							350 mA		OUT_2		"	"
			83									"	"						350 mA			OUT_3		"	"
			84									"	"					350 mA				OUT_4		"	"
			85									"	"				350 mA					OUT_5		"	"
			86									"	"			350 mA						OUT_6		"	"
			87									"	"		350 mA							OUT_7		"	"
			88									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	89	IB_1								"									350 mA	IB_1-OUT_1	1000		
			90		IB_2							"								350 mA		IB_2-OUT_2	"		
			91			IB_3						"							350 mA			IB_3-OUT_3	"		
			92				IB_4					"						350 mA				IB_4-OUT_4	"		
			93					IB_5				"					350 mA					IB_5-OUT_5	"		
			94						IB_6			"				350 mA						IB_6-OUT_6	"		
			95							IB_7		"			350 mA							IB_7-OUT_7	"		
			96								IB_8	"		350 mA								IB_8-OUT_8	"		
2 T_A = +125°C	I_{CEX}		97									0 V									50 V	OUT_1		10.0	µA
			98									"								50 V		OUT_2		"	"
			99									"							50 V			OUT_3		"	"
			100									"						50 V				OUT_4		"	"
			101									"					50 V					OUT_5		"	"
			102									"				50 V						OUT_6		"	"
			103									"			50 V							OUT_7		"	"
			104									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	105	500 µA								"									350 mA	OUT_1		1.8	V
			106		500 µA							"								350 mA		OUT_2		"	"
			107			500 µA						"							350 mA			OUT_3		"	"
			108				500 µA					"						350 mA				OUT_4		"	"
			109					500 µA				"					350 mA					OUT_5		"	"
			110						500 µA			"				350 mA						OUT_6		"	"
			111							500 µA		"			350 mA							OUT_7		"	"
			112								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	113	350 µA								"									200 mA	OUT_1		1.5	V
			114		350 µA							"								200 mA		OUT_2		"	"
			115			350 µA						"							200 mA			OUT_3		"	"
			116				350 µA					"						200 mA				OUT_4		"	"
			117					350 µA				"					200 mA					OUT_5		"	"
			118						350 µA			"				200 mA						OUT_6		"	"
			119							350 µA		"			200 mA							OUT_7		"	"
			120								350 µA	"		200 mA								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{CE(sat)}$	3007	121	250 µA								0 V									100 mA	OUT_1		1.3	V
			122		250 µA							"								100 mA		OUT_2		"	"
			123			250 µA						"							100 mA			OUT_3		"	"
			124				250 µA					"						100 mA				OUT_4		"	"
			125					250 µA				"					100 mA					OUT_5		"	"
			126						250 µA			"				100 mA						OUT_6		"	"
			127							250 µA		"			100 mA							OUT_7		"	"
			128								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		129	3.85 V								"										IN_1	650	1350	µA
			130		3.85 V							"										IN_2	"	"	"
			131			3,85 V						"										IN_3	"	"	"
			132				3.85 V					"										IN_4	"	"	"
			133					3.85 V				"										IN_5	"	"	"
			134						3.85 V			"										IN_6	"	"	"
			135							3.85 V		"										IN_7	"	"	"
			136								3.85 V	"										IN_8	"	"	"
	$I_{IN(off)}$		137	25 µA								"									50 V	OUT_1		500	µA
			138		25 µA							"								50V		OUT_2		"	"
			139			25 µA						"							50 V			OUT_3		"	"
			140				25 µA					"						50 V				OUT_4		"	"
			141					25 µA				"					50 V					OUT_5		"	"
			142						25 µA			"				50 V						OUT_6		"	"
			143							25 µA		"			50 V							OUT_7		"	"
			144								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		145	2.0 V								0 V									200 mA	OUT_1		2.0	V
			146		2.0 V							"								200 mA		OUT_2		"	"
			147			2.0 V						"							200 mA			OUT_3		"	"
			148				2.0 V					"						200 mA				OUT_4		"	"
			149					2.0 V				"					200 mA					OUT_5		"	"
			150						2.0 V			"				200 mA						OUT_6		"	"
			151							2.0 V		"			200 mA							OUT_7		"	"
			152								2.0 V	"		200 mA								OUT_8		"	"
	$V_{IN(on)}$		153	2.2 V								0 V									250 mA	OUT_1		2.0	V
			154		2.2 V							"								250 mA		OUT_2		"	"
			155			2.2 V						"							250 mA			OUT_3		"	"
			156				2.2 V					"						250 mA				OUT_4		"	"
			157					2.2 V				"					250 mA					OUT_5		"	"
			158						2.2 V			"				250 mA						OUT_6		"	"
			159							2.2 V		"			250 mA							OUT_7		"	"
			160								2.2 V	"		250 mA								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{IN(on)}$		161	2.4 V								0 V									300 mA	OUT_1		2.0	V
			162		2.4 V							"								300 mA		OUT_2		"	"
			163			2.4 V						"							300 mA			OUT_3		"	"
			164				2.4 V					"						300 mA				OUT_4		"	"
			165					2.4 V				"					300 mA					OUT_5		"	"
			166						2.4 V			"				300 mA						OUT_6		"	"
			167							2.4 V		"			300 mA							OUT_7		"	"
			168								2.4 V	"		300 mA								OUT_8		"	"
	I_R		169									0 V	50 V								0 V	COM		10.0	µA
			170									"	"							0 V		COM		"	"
			171									"	"						0 V			COM		"	"
			172									"	"					0 V				COM		"	"
			173									"	"				0 V					COM		"	"
			174									"	"			0 V						COM		"	"
			175									"	"		0 V							COM		"	"
			176									"	"	0 V								COM		"	"
	V_F		177									"	0 V								350 mA	OUT_1		2.0	V
			178									"	"							350 mA		OUT_2		"	"
			179									"	"						350 mA			OUT_3		"	"
			180									"	"					350 mA				OUT_4		"	"
			181									"	"				350 mA					OUT_5		"	"
			182									"	"			350 mA						OUT_6		"	"
			183									"	"		350 mA							OUT_7		"	"
			184									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	185	IB_1								"									350 mA	IB_1-OUT_1	1000		
			186		IB_2							"								350 mA		IB_2-OUT_2	"		
			187			IB_3						"							350 mA			IB_3-OUT_3	"		
			188				IB_4					"						350 mA				IB_4-OUT_4	"		
			189					IB_5				"					350 mA					IB_5-OUT_5	"		
			190						IB_6			"				350 mA						IB_6-OUT_6	"		
			191							IB_7		"			350 mA							IB_7-OUT_7	"		
			192								IB_8	"		350 mA								IB_8-OUT_8	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	I_{CEX}		193									0 V									50 V	OUT_1		10.0	µA
			194									"								50 V		OUT_2		"	"
			195									"							50 V			OUT_3		"	"
			196									"						50 V				OUT_4		"	"
			197									"					50 V					OUT_5		"	"
			198									"				50 V						OUT_6		"	"
			199									"			50 V							OUT_7		"	"
			200									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	201	850 µA								"									350 mA	OUT_1		1.8	V
			202		850 µA							"								350 mA		OUT_2		"	"
			203			850 µA						"							350 mA			OUT_3		"	"
			204				850 µA					"						350 mA				OUT_4		"	"
			205					850 µA				"					350 mA					OUT_5		"	"
			206						850 µA			"				350 mA						OUT_6		"	"
			207							850 µA		"			350 mA							OUT_7		"	"
			208								850 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	209	550 µA								"									200 mA	OUT_1		1.5	V
			210		550 µA							"								200 mA		OUT_2		"	"
			211			550 µA						"							200 mA			OUT_3		"	"
			212				550 µA					"						200 mA				OUT_4		"	"
			213					550 µA				"					200 mA					OUT_5		"	"
			214						550 µA			"				200 mA						OUT_6		"	"
			215							550 µA		"			200 mA							OUT_7		"	"
			216								550 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	217	350 µA								"									100 mA	OUT_1		1.3	V
			218		350 µA							"								100 mA		OUT_2		"	"
			219			350 µA						"							100 mA			OUT_3		"	"
			220				350 µA					"						100 mA				OUT_4		"	"
			221					350 µA				"					100 mA					OUT_5		"	"
			222						350 µA			"				100 mA						OUT_6		"	"
			223							350 µA		"			100 mA							OUT_7		"	"
			224								350 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		225	3.85 V								"										IN_1	650	1350	µA
			226		3.85 V							"										IN_2	"	"	"
			227			3,85 V						"										IN_3	"	"	"
			228				3.85 V					"										IN_4	"	"	"
			229					3.85 V				"										IN_5	"	"	"
			230						3.85 V			"										IN_6	"	"	"
			231							3.85 V		"										IN_7	"	"	"
			232								3.85 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$I_{IN(off)}$		233	25 µA								0 V									50 V	OUT_1		500	µA
			234		25 µA							"								50V		OUT_2		"	"
			235			25 µA						"							50 V			OUT_3		"	"
			236				25 µA					"						50 V				OUT_4		"	"
			237					25 µA				"					50 V					OUT_5		"	"
			238						25 µA			"				50 V						OUT_6		"	"
			239							25 µA		"			50 V							OUT_7		"	"
			240								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		241	2.6 V								0 V									200 mA	OUT_1		2.0	V
			242		2.6 V							"								200 mA		OUT_2		"	"
			243			2.6 V						"							200 mA			OUT_3		"	"
			244				2.6 V					"						200 mA				OUT_4		"	"
			245					2.6 V				"					200 mA					OUT_5		"	"
			246						2.6 V			"				200 mA						OUT_6		"	"
			247							2.6 V		"			200 mA							OUT_7		"	"
			248								2.6 V	"		200 mA								OUT_8		"	"
	$V_{IN(on)}$		249	2.8 V								0 V									250 mA	OUT_1		2.0	V
			250		2.8 V							"								250 mA		OUT_2		"	"
			251			2.8 V						"							250 mA			OUT_3		"	"
			252				2.8 V					"						250 mA				OUT_4		"	"
			253					2.8 V				"					250 mA					OUT_5		"	"
			254						2.8 V			"				250 mA						OUT_6		"	"
			255							2.8 V		"			250 mA							OUT_7		"	"
			256								2.8 V	"		250 mA								OUT_8		"	"
	$V_{IN(on)}$		257	3.0 V								0 V									300 mA	OUT_1		2.0	V
			258		3.0 V							"								300 mA		OUT_2		"	"
			259			3.0 V						"							300 mA			OUT_3		"	"
			260				3.0 V					"						300 mA				OUT_4		"	"
			261					3.0 V				"					300 mA					OUT_5		"	"
			262						3.0 V			"				300 mA						OUT_6		"	"
			263							3.0 V		"			300 mA							OUT_7		"	"
			264								3.0 V	"		300 mA								OUT_8		"	"
	I_R		265									0 V	50 V								0 V	COM		10.0	µA
			266									"	"							0 V		COM		"	"
			267									"	"						0 V			COM		"	"
			268									"	"					0 V				COM		"	"
			269									"	"				0 V					COM		"	"
			270									"	"			0 V						COM		"	"
			271									"	"		0 V							COM		"	"
			272									"	"	0 V								COM		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	V_F		273									0 V	0 V							350 mA	350 mA	OUT_1		2.0	V
			274									"	"						350 mA			OUT_2		"	"
			275									"	"					350 mA				OUT_3		"	"
			276									"	"				350 mA					OUT_4		"	"
			277									"	"			350 mA						OUT_5		"	"
			278									"	"		350 mA							OUT_6		"	"
			279									"	"									OUT_7		"	"
			280									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	281	IB_1								"								350 mA	350 mA	IB_1-OUT_1	500		
			282		IB_2							"										IB_2-OUT_2	"		
			283			IB_3						"										IB_3-OUT_3	"		
			284				IB_4					"										IB_4-OUT_4	"		
			285					IB_5				"										IB_5-OUT_5	"		
			286						IB_6			"										IB_6-OUT_6	"		
			287							IB_7		"										IB_7-OUT_7	"		
			288								IB_8	"		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA			IB_8-OUT_8	"		
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	289	IN_1								"										IN_1-OUT_1		750	ns
			290		IN_2							"										IN_2-OUT_2		"	"
			291			IN_3						"										IN_3-OUT_3		"	"
			292				IN_4					"										IN_4-OUT_4		"	"
			293					IN_5				"										IN_5-OUT_5		"	"
			294						IN_6			"										IN_6-OUT_6		"	"
			295							IN_7		"										IN_7-OUT_7		"	"
			296								IN_8	"		OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_8-OUT_8		"	"
	t_{PHL}	3003 Fig. 4	297	IN_1								"										IN_1-OUT_1		300	ns
			298		IN_2							"										IN_2-OUT_2		"	"
			299			IN_3						"										IN_3-OUT_3		"	"
			300				IN_4					"										IN_4-OUT_4		"	"
			301					IN_5				"										IN_5-OUT_5		"	"
			302						IN_6			"										IN_6-OUT_6		"	"
			303							IN_7		"										IN_7-OUT_7		"	"
			304								IN_8	"		OUT	OUT	OUT	OUT	OUT	OUT	OUT	OUT	IN_8-OUT_8		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1									0 V									50 V	OUT_1		10.0	µA
			2									"								50 V		OUT_2		"	"
			3									"							50 V			OUT_3		"	"
			4									"						50 V				OUT_4		"	"
			5									"					50 V					OUT_5		"	"
			6									"				50 V						OUT_6		"	"
			7									"			50 V							OUT_7		"	"
			8									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	9	500 µA								"									350 mA	OUT_1		1.6	V
			10		500 µA							"								350 mA		OUT_2		"	"
			11			500 µA						"							350 mA			OUT_3		"	"
			12				500 µA					"						350 mA				OUT_4		"	"
			13					500 µA				"					350 mA					OUT_5		"	"
			14						500 µA			"				350 mA						OUT_6		"	"
			15							500 µA		"			350 mA							OUT_7		"	"
			16								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	17	350 µA								"									200 mA	OUT_1		1.3	V
			18		350 µA							"								200 mA		OUT_2		"	"
			19			350 µA						"							200 mA			OUT_3		"	"
			20				350 µA					"						200 mA				OUT_4		"	"
			21					350 µA				"					200 mA					OUT_5		"	"
			22						350 µA			"				200 mA						OUT_6		"	"
			23							350 µA		"			200 mA							OUT_7		"	"
			24								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	25	250 µA								"									100 mA	OUT_1		1.1	V
			26		250 µA							"								100 mA		OUT_2		"	"
			27			250 µA						"							100 mA			OUT_3		"	"
			28				250 µA					"						100 mA				OUT_4		"	"
			29					250 µA				"					100 mA					OUT_5		"	"
			30						250 µA			"				100 mA						OUT_6		"	"
			31							250 µA		"			100 mA							OUT_7		"	"
			32								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		33	5.0 V								"										IN_1	250	500	µA
			34		5.0 V							"										IN_2	"	"	"
			35			5.0 V						"										IN_3	"	"	"
			36				5.0 V					"										IN_4	"	"	"
			37					5.0 V				"										IN_5	"	"	"
			38						5.0 V			"										IN_6	"	"	"
			39							5.0 V		"										IN_7	"	"	"
			40								5.0 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$I_{IN(on)}$		41	12 V								0 V										IN_1	750	1450	µA
			42		12 V							"										IN_2	"	"	"
			43			12 V						"										IN_3	"	"	"
			44				12 V					"										IN_4	"	"	"
			45					12 V				"										IN_5	"	"	"
			46						12 V			"										IN_6	"	"	"
			47							12 V		"										IN_7	"	"	"
			48								12 V	"										IN_8	"	"	"
	$I_{IN(off)}$		49	25 µA								"								50 V		OUT_1		500	µA
			50		25 µA							"								50V		OUT_2		"	"
			51			25 µA						"							50 V			OUT_3		"	"
			52				25 µA					"						50 V				OUT_4		"	"
			53					25 µA				"					50 V					OUT_5		"	"
			54						25 µA			"				50 V						OUT_6		"	"
			55							25 µA		"			50 V							OUT_7		"	"
			56								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		57	5.0 V								0 V									125 mA	OUT_1		2.0	V
			58		5.0 V							"								125 mA		OUT_2		"	"
			59			5.0 V						"							125 mA			OUT_3		"	"
			60				5.0 V					"						125 mA				OUT_4		"	"
			61					5.0 V				"					125 mA					OUT_5		"	"
			62						5.0 V			"				125 mA						OUT_6		"	"
			63							5.0 V		"			125 mA							OUT_7		"	"
			64								5.0 V	"		125 mA								OUT_8		"	"
	$V_{IN(on)}$		65	6.0 V								0 V									200 mA	OUT_1		2.0	V
			66		6.0 V							"								200 mA		OUT_2		"	"
			67			6.0 V						"							200 mA			OUT_3		"	"
			68				6.0 V					"						200 mA				OUT_4		"	"
			69					6.0 V				"					200 mA					OUT_5		"	"
			70						6.0 V			"				200 mA						OUT_6		"	"
			71							6.0 V		"			200 mA							OUT_7		"	"
			72								6.0 V	"		200 mA								OUT_8		"	"
	$V_{IN(on)}$		73	7.0 V								0 V									275 mA	OUT_1		2.0	V
			74		7.0 V							"								275 mA		OUT_2		"	"
			75			7.0 V						"							275 mA			OUT_3		"	"
			76				7.0 V					"						275 mA				OUT_4		"	"
			77					7.0 V				"					275 mA					OUT_5		"	"
			78						7.0 V			"				275 mA						OUT_6		"	"
			79							7.0 V		"			275 mA							OUT_7		"	"
			80								7.0 V	"		275 mA								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$V_{IN(on)}$		81	8.0 V								0 V									350 mA	OUT_1		2.0	V
			82		8.0 V							"								350 mA		OUT_2		"	"
			83			8.0 V						"							350 mA			OUT_3		"	"
			84				8.0 V					"						350 mA				OUT_4		"	"
			85					8.0 V				"					350 mA					OUT_5		"	"
			86						8.0 V			"				350 mA						OUT_6		"	"
			87							8.0 V		"			350 mA							OUT_7		"	"
			88								8.0 V	"		350 mA								OUT_8		"	"
	I_R		89									0 V	50 V								0 V	COM		10.0	µA
			90									"	"							0 V		COM		"	"
			91									"	"						0 V			COM		"	"
			92									"	"					0 V				COM		"	"
			93									"	"				0 V					COM		"	"
			94									"	"			0 V						COM		"	"
			95									"	"		0 V							COM		"	"
			96									"	"	0 V								COM		"	"
	V_F		97									"	0 V								350 mA	OUT_1		2.0	V
			98									"	"							350 mA		OUT_2		"	"
			99									"	"						350 mA			OUT_3		"	"
			100									"	"					350 mA				OUT_4		"	"
			101									"	"				350 mA					OUT_5		"	"
			102									"	"			350 mA						OUT_6		"	"
			103									"	"		350 mA							OUT_7		"	"
			104									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	105	IB_1								"									350 mA	IB_1-OUT_1	1000		
			106		IB_2							"								350 mA		IB_2-OUT_2	"		
			107			IB_3						"							350 mA			IB_3-OUT_3	"		
			108				IB_4					"						350 mA				IB_4-OUT_4	"		
			109					IB_5				"					350 mA					IB_5-OUT_5	"		
			110						IB_6			"				350 mA						IB_6-OUT_6	"		
			111							IB_7		"			350 mA							IB_7-OUT_7	"		
			112								IB_8	"		350 mA								IB_8-OUT_8	"		
2 T_A = +125°C	I_{CEX}		113									0 V									50 V	OUT_1		10.0	µA
			114									"								50 V		OUT_2		"	"
			115									"							50 V			OUT_3		"	"
			116									"						50 V				OUT_4		"	"
			117									"					50 V					OUT_5		"	"
			118									"				50 V						OUT_6		"	"
			119									"			50 V							OUT_7		"	"
			120									"		50 V								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$V_{CE(sat)}$	3007	121	500 µA								0 V									350 mA	OUT_1		1.8	V
			122		500 µA							"								350 mA		OUT_2		"	"
			123			500 µA						"							350 mA			OUT_3		"	"
			124				500 µA					"						350 mA				OUT_4		"	"
			125					500 µA				"					350 mA					OUT_5		"	"
			126						500 µA			"				350 mA						OUT_6		"	"
			127							500 µA		"			350 mA							OUT_7		"	"
			128								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	129	350 µA								"								200 mA	200 mA	OUT_1		1.5	V
			130		350 µA							"							200 mA			OUT_2		"	"
			131			350 µA						"										OUT_3		"	"
			132				350 µA					"						200 mA				OUT_4		"	"
			133					350 µA				"					200 mA					OUT_5		"	"
			134						350 µA			"				200 mA						OUT_6		"	"
			135							350 µA		"			200 mA							OUT_7		"	"
			136								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	137	250 µA								"								100 mA	100 mA	OUT_1		1.3	V
			138		250 µA							"							100 mA			OUT_2		"	"
			139			250 µA						"										OUT_3		"	"
			140				250 µA					"						100 mA				OUT_4		"	"
			141					250 µA				"					100 mA					OUT_5		"	"
			142						250 µA			"				100 mA						OUT_6		"	"
			143							250 µA		"			100 mA							OUT_7		"	"
			144								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		145	5.0 V								"										IN_1	250	500	µA
			146		5.0 V							"										IN_2	"	"	"
			147			5.0 V						"										IN_3	"	"	"
			148				5.0 V					"										IN_4	"	"	"
			149					5.0 V				"										IN_5	"	"	"
			150						5.0 V			"										IN_6	"	"	"
			151							5.0 V		"										IN_7	"	"	"
			152								5.0 V	"										IN_8	"	"	"
	$I_{IN(on)}$		153	12 V								"										IN_1	750	1450	µA
			154		12 V							"										IN_2	"	"	"
			155			12 V						"										IN_3	"	"	"
			156				12 V					"										IN_4	"	"	"
			157					12 V				"										IN_5	"	"	"
			158						12 V			"										IN_6	"	"	"
			159							12 V		"										IN_7	"	"	"
			160								12 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(off)}$		161	25 µA								0 V									50 V	OUT_1		500	µA
			162		25 µA							"								50V		OUT_2		"	"
			163			25 µA						"							50 V			OUT_3		"	"
			164				25 µA					"						50 V				OUT_4		"	"
			165					25 µA				"					50 V					OUT_5		"	"
			166						25 µA			"				50 V						OUT_6		"	"
			167							25 µA		"			50 V							OUT_7		"	"
			168								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		169	5.0 V								0 V									125 mA	OUT_1		2.0	V
			170		5.0 V							"								125 mA		OUT_2		"	"
			171			5.0 V						"							125 mA			OUT_3		"	"
			172				5.0 V					"						125 mA				OUT_4		"	"
			173					5.0 V				"					125 mA					OUT_5		"	"
			174						5.0 V			"				125 mA						OUT_6		"	"
			175							5.0 V		"			125 mA							OUT_7		"	"
			176								5.0 V	"		125 mA								OUT_8		"	"
	$V_{IN(on)}$		177	6.0 V								0 V									200 mA	OUT_1		2.0	V
			178		6.0 V							"								200 mA		OUT_2		"	"
			179			6.0 V						"							200 mA			OUT_3		"	"
			180				6.0 V					"						200 mA				OUT_4		"	"
			181					6.0 V				"					200 mA					OUT_5		"	"
			182						6.0 V			"				200 mA						OUT_6		"	"
			183							6.0 V		"			200 mA							OUT_7		"	"
			184								6.0 V	"		200 mA								OUT_8		"	"
	$V_{IN(on)}$		185	7.0 V								0 V									275 mA	OUT_1		2.0	V
			186		7.0 V							"								275 mA		OUT_2		"	"
			187			7.0 V						"							275 mA			OUT_3		"	"
			188				7.0 V					"						275 mA				OUT_4		"	"
			189					7.0 V				"					275 mA					OUT_5		"	"
			190						7.0 V			"				275 mA						OUT_6		"	"
			191							7.0 V		"			275 mA							OUT_7		"	"
			192								7.0 V	"		275 mA								OUT_8		"	"
	$V_{IN(on)}$		193	8.0 V								0 V									350 mA	OUT_1		2.0	V
			194		8.0 V							"								350 mA		OUT_2		"	"
			195			8.0 V						"							350 mA			OUT_3		"	"
			196				8.0 V					"						350 mA				OUT_4		"	"
			197					8.0 V				"					350 mA					OUT_5		"	"
			198						8.0 V			"				350 mA						OUT_6		"	"
			199							8.0 V		"			350 mA							OUT_7		"	"
			200								8.0 V	"		350 mA								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	I_R		201									0 V	50 V								0 V	COM		10.0	µA
			202									"	"							0 V		COM		"	"
			203									"	"						0 V			COM		"	"
			204									"	"					0 V				COM		"	"
			205									"	"				0 V					COM		"	"
			206									"	"			0 V						COM		"	"
			207									"	"		0 V							COM		"	"
			208									"	"	0 V								COM		"	"
	V_F		209									"	0 V								350 mA	OUT_1		2.0	V
			210									"	"							350 mA		OUT_2		"	"
			211									"	"						350 mA			OUT_3		"	"
			212									"	"					350 mA				OUT_4		"	"
			213									"	"				350 mA					OUT_5		"	"
			214									"	"			350 mA						OUT_6		"	"
			215									"	"		350 mA							OUT_7		"	"
			216									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	217	IB_1								"									350 mA	IB_1-OUT_1	1000		
			218		IB_2							"								350 mA		IB_2-OUT_2	"		
			219			IB_3						"							350 mA			IB_3-OUT_3	"		
			220				IB_4					"						350 mA				IB_4-OUT_4	"		
			221					IB_5				"					350 mA					IB_5-OUT_5	"		
			222						IB_6			"				350 mA						IB_6-OUT_6	"		
			223							IB_7		"			350 mA							IB_7-OUT_7	"		
			224								IB_8	"		350 mA								IB_8-OUT_8	"		
3 T_A = -55°C	I_{CEX}		225									0 V									50 V	OUT_1		10.0	µA
			226									"								50 V		OUT_2		"	"
			227									"							50 V			OUT_3		"	"
			228									"						50 V				OUT_4		"	"
			229									"					50 V					OUT_5		"	"
			230									"				50 V						OUT_6		"	"
			231									"			50 V							OUT_7		"	"
			232									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	233	850 µA								"									350 mA	OUT_1		1.8	V
			234		850 µA							"								350 mA		OUT_2		"	"
			235			850 µA						"							350 mA			OUT_3		"	"
			236				850 µA					"						350 mA				OUT_4		"	"
			237					850 µA				"					350 mA					OUT_5		"	"
			238						850 µA			"				350 mA						OUT_6		"	"
			239							850 µA		"			350 mA							OUT_7		"	"
			240								850 µA	"		350 mA								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$V_{CE(sat)}$	3007	241	550 µA								0 V									200 mA	OUT_1		1.5	V
			242		550 µA							"								200 mA		OUT_2		"	"
			243			550 µA						"							200 mA			OUT_3		"	"
			244				550 µA					"						200 mA				OUT_4		"	"
			245					550 µA				"					200 mA					OUT_5		"	"
			246						550 µA			"				200 mA						OUT_6		"	"
			247							550 µA		"			200 mA							OUT_7		"	"
			248								550 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	249	350 µA								"									100 mA	OUT_1		1.3	V
			250		350 µA							"								100 mA		OUT_2		"	"
			251			350 µA						"							100 mA			OUT_3		"	"
			252				350 µA					"						100 mA				OUT_4		"	"
			253					350 µA				"					100 mA					OUT_5		"	"
			254						350 µA			"				100 mA						OUT_6		"	"
			255							350 µA		"			100 mA							OUT_7		"	"
			256								350 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		257	5.0 V								"										IN_1	250	500	µA
			258		5.0 V							"										IN_2	"	"	"
			259			5.0 V						"										IN_3	"	"	"
			260				5.0 V					"										IN_4	"	"	"
			261					5.0 V				"										IN_5	"	"	"
			262						5.0 V			"										IN_6	"	"	"
			263							5.0 V		"										IN_7	"	"	"
			264								5.0 V	"										IN_8	"	"	"
	$I_{IN(on)}$		265	12 V								"										IN_1	750	1450	µA
			266		12 V							"										IN_2	"	"	"
			267			12 V						"										IN_3	"	"	"
			268				12 V					"										IN_4	"	"	"
			269					12 V				"										IN_5	"	"	"
			270						12 V			"										IN_6	"	"	"
			271							12 V		"										IN_7	"	"	"
			272								12 V	"										IN_8	"	"	"
	$I_{IN(off)}$		273	25 µA								"									50 V	OUT_1		500	µA
			274		25 µA							"								50V		OUT_2		"	"
			275			25 µA						"							50 V			OUT_3		"	"
			276				25 µA					"						50 V				OUT_4		"	"
			277					25 µA				"					50 V					OUT_5		"	"
			278						25 µA			"				50 V						OUT_6		"	"
			279							25 µA		"			50 V							OUT_7		"	"
			280								25 µA	"		50 V								OUT_8		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$V_{IN(on)}$		281	6.0 V								0 V									125 mA	OUT_1		2.0	V
			282		6.0 V							"								125 mA		OUT_2		"	"
			283			6.0 V						"							125 mA			OUT_3		"	"
			284				6.0 V					"						125 mA				OUT_4		"	"
			285					6.0 V				"					125 mA					OUT_5		"	"
			286						6.0 V			"				125 mA						OUT_6		"	"
			287							6.0 V		"			125 mA							OUT_7		"	"
			288								6.0 V	"		125 mA								OUT_8		"	"
	$V_{IN(on)}$		289	8.0 V								0 V									200 mA	OUT_1		2.0	V
			290		8.0 V							"								200 mA		OUT_2		"	"
			291			8.0 V						"							200 mA			OUT_3		"	"
			292				8.0 V					"						200 mA				OUT_4		"	"
			293					8.0 V				"					200 mA					OUT_5		"	"
			294						8.0 V			"				200 mA						OUT_6		"	"
			295							8.0 V		"			200 mA							OUT_7		"	"
			296								8.0 V	"		200 mA								OUT_8		"	"
	$V_{IN(on)}$		297	10.0 V								0 V									275 mA	OUT_1		2.0	V
			298		10.0 V							"								275 mA		OUT_2		"	"
			299			10.0 V						"							275 mA			OUT_3		"	"
			300				10.0 V					"						275 mA				OUT_4		"	"
			301					10.0 V				"					275 mA					OUT_5		"	"
			302						10.0 V			"				275 mA						OUT_6		"	"
			303							10.0 V		"			275 mA							OUT_7		"	"
			304								10.0 V	"		275 mA								OUT_8		"	"
	$V_{IN(on)}$		305	12.0 V								0 V									350 mA	OUT_1		2.0	V
			306		12.0 V							"								350 mA		OUT_2		"	"
			307			12.0 V						"							350 mA			OUT_3		"	"
			308				12.0 V					"						350 mA				OUT_4		"	"
			309					12.0 V				"					350 mA					OUT_5		"	"
			310						12.0 V			"				350 mA						OUT_6		"	"
			311							12.0 V		"			350 mA							OUT_7		"	"
			312								12.0 V	"		350 mA								OUT_8		"	"
	I_R		313									0 V	50 V								0 V	COM		10.0	µA
			314									"	"							0 V		COM		"	"
			315									"	"						0 V			COM		"	"
			316									"	"					0 V				COM		"	"
			317									"	"				0 V					COM		"	"
			318									"	"			0 V						COM		"	"
			319									"	"		0 V							COM		"	"
			320									"	"	0 V								COM		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	V_F		321									0 V	0 V							350 mA	350 mA	OUT_1		2.0	V
			322									"	"						350 mA			OUT_2		"	"
			323									"	"					350 mA				OUT_3		"	"
			324									"	"				350 mA					OUT_4		"	"
			325									"	"			350 mA						OUT_5		"	"
			326									"	"		350 mA							OUT_6		"	"
			327									"	"	350 mA								OUT_7		"	"
			328									"	"									OUT_8		"	"
	h_{FE}	3003	329	IB_1								"								350 mA		IB_1-OUT_1	500		
			330		IB_2							"										IB_2-OUT_2	"		
			331			IB_3						"										IB_3-OUT_3	"		
			332				IB_4					"										IB_4-OUT_4	"		
			333					IB_5				"										IB_5-OUT_5	"		
			334						IB_6			"										IB_6-OUT_6	"		
			335							IB_7		"										IB_7-OUT_7	"		
			336								IB_8	"		350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	350 mA	IB_8-OUT_8	"		
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	337	IN_1								"									OUT	IN_1-OUT_1		750	ns
			338		IN_2							"								OUT		IN_2-OUT_2		"	"
			339			IN_3						"							OUT			IN_3-OUT_3		"	"
			340				IN_4					"						OUT				IN_4-OUT_4		"	"
			341					IN_5				"					OUT					IN_5-OUT_5		"	"
			342						IN_6			"				OUT						IN_6-OUT_6		"	"
			343							IN_7		"			OUT							IN_7-OUT_7		"	"
			344								IN_8	"		OUT								IN_8-OUT_8		"	"
	t_{PHL}	3003 Fig. 4	345	IN_1								"									OUT	IN_1-OUT_1		300	ns
			346		IN_2							"								OUT		IN_2-OUT_2		"	"
			347			IN_3						"							OUT			IN_3-OUT_3		"	"
			348				IN_4					"						OUT				IN_4-OUT_4		"	"
			349					IN_5				"					OUT					IN_5-OUT_5		"	"
			350						IN_6			"				OUT						IN_6-OUT_6		"	"
			351							IN_7		"			OUT							IN_7-OUT_7		"	"
			352								IN_8	"		OUT								IN_8-OUT_8		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	I_{CEX}		1									0 V									50 V	OUT_1		10.0	µA
			2									"								50 V		OUT_2		"	"
			3									"							50 V			OUT_3		"	"
			4									"						50 V				OUT_4		"	"
			5									"					50 V					OUT_5		"	"
			6									"				50 V						OUT_6		"	"
			7									"			50 V							OUT_7		"	"
			8									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	9	500 µA								"									350 mA	OUT_1		1.6	V
			10		500 µA							"								350 mA		OUT_2		"	"
			11			500 µA						"							350 mA			OUT_3		"	"
			12				500 µA					"						350 mA				OUT_4		"	"
			13					500 µA				"					350 mA					OUT_5		"	"
			14						500 µA			"				350 mA						OUT_6		"	"
			15							500 µA		"			350 mA							OUT_7		"	"
			16								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	17	350 µA								"									200 mA	OUT_1		1.3	V
			18		350 µA							"								200 mA		OUT_2		"	"
			19			350 µA						"							200 mA			OUT_3		"	"
			20				350 µA					"						200 mA				OUT_4		"	"
			21					350 µA				"					200 mA					OUT_5		"	"
			22						350 µA			"				200 mA						OUT_6		"	"
			23							350 µA		"			200 mA							OUT_7		"	"
			24								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	25	250 µA								"									100 mA	OUT_1		1.1	V
			26		250 µA							"								100 mA		OUT_2		"	"
			27			250 µA						"							100 mA			OUT_3		"	"
			28				250 µA					"						100 mA				OUT_4		"	"
			29					250 µA				"					100 mA					OUT_5		"	"
			30						250 µA			"				100 mA						OUT_6		"	"
			31							250 µA		"			100 mA							OUT_7		"	"
			32								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		33	3.0 V								"										IN_1	1180	2400	µA
			34		3.0 V							"										IN_2	"	"	"
			35			3.0 V						"										IN_3	"	"	"
			36				3.0 V					"										IN_4	"	"	"
			37					3.0 V				"										IN_5	"	"	"
			38						3.0 V			"										IN_6	"	"	"
			39							3.0 V		"										IN_7	"	"	"
			40								3.0 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
1 T_A = +25°C	$I_{IN(off)}$		41	25 µA								0 V									50 V	OUT_1		500	µA
			42		25 µA							"								50V		OUT_2		"	"
			43			25 µA						"							50 V			OUT_3		"	"
			44				25 µA					"						50 V				OUT_4		"	"
			45					25 µA				"					50 V					OUT_5		"	"
			46						25 µA			"				50 V						OUT_6		"	"
			47							25 µA		"			50 V							OUT_7		"	"
			48								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		49	2.4 V								"									350 mA	OUT_1		2.0	V
			50		2.4 V							"								350 mA		OUT_2		"	"
			51			2.4 V						"							350 mA			OUT_3		"	"
			52				2.4 V					"						350 mA				OUT_4		"	"
			53					2.4 V				"					350 mA					OUT_5		"	"
			54						2.4 V			"				350 mA						OUT_6		"	"
			55							2.4 V		"			350 mA							OUT_7		"	"
			56								2.4 V	"		350 mA								OUT_8		"	"
	I_R		57									0 V	50 V								0 V	COM		10.0	µA
			58									"	"							0 V		COM		"	"
			59									"	"						0 V			COM		"	"
			60									"	"					0 V				COM		"	"
			61									"	"				0 V					COM		"	"
			62									"	"			0 V						COM		"	"
			63									"	"		0 V							COM		"	"
			64									"		0 V								COM		"	"
	V_F		65									"	0 V								350 mA	OUT_1		2.0	V
			66									"	"							350 mA		OUT_2		"	"
			67									"	"						350 mA			OUT_3		"	"
			68									"	"					350 mA				OUT_4		"	"
			69									"	"				350 mA					OUT_5		"	"
			70									"	"			350 mA						OUT_6		"	"
			71									"	"		350 mA							OUT_7		"	"
			72									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	73	IB_1								"									350 mA	IB_1-OUT_1	1000		
			74		IB_2							"								350 mA		IB_2-OUT_2	"		
			75			IB_3						"							350 mA			IB_3-OUT_3	"		
			76				IB_4					"						350 mA				IB_4-OUT_4	"		
			77					IB_5				"					350 mA					IB_5-OUT_5	"		
			78						IB_6			"				350 mA						IB_6-OUT_6	"		
			79							IB_7		"			350 mA							IB_7-OUT_7	"		
			80								IB_8	"		350 mA								IB_8-OUT_8	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	I_{CEX}		81									0 V									50 V	OUT_1		10.0	µA
			82									"								50 V		OUT_2		"	"
			83									"							50 V			OUT_3		"	"
			84									"						50 V				OUT_4		"	"
			85									"					50 V					OUT_5		"	"
			86									"				50 V						OUT_6		"	"
			87									"			50 V							OUT_7		"	"
			88									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	89	500 µA								"									350 mA	OUT_1		1.8	V
			90		500 µA							"								350 mA		OUT_2		"	"
			91			500 µA						"							350 mA			OUT_3		"	"
			92				500 µA					"						350 mA				OUT_4		"	"
			93					500 µA				"					350 mA					OUT_5		"	"
			94						500 µA			"				350 mA						OUT_6		"	"
			95							500 µA		"			350 mA							OUT_7		"	"
			96								500 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	97	350 µA								"									200 mA	OUT_1		1.5	V
			98		350 µA							"								200 mA		OUT_2		"	"
			99			350 µA						"							200 mA			OUT_3		"	"
			100				350 µA					"						200 mA				OUT_4		"	"
			101					350 µA				"					200 mA					OUT_5		"	"
			102						350 µA			"				200 mA						OUT_6		"	"
			103							350 µA		"			200 mA							OUT_7		"	"
			104								350 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	105	250 µA								"									100 mA	OUT_1		1.3	V
			106		250 µA							"								100 mA		OUT_2		"	"
			107			250 µA						"							100 mA			OUT_3		"	"
			108				250 µA					"						100 mA				OUT_4		"	"
			109					250 µA				"					100 mA					OUT_5		"	"
			110						250 µA			"				100 mA						OUT_6		"	"
			111							250 µA		"			100 mA							OUT_7		"	"
			112								250 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		113	3.0 V								"										IN_1	1180	2400	µA
			114		3.0 V							"										IN_2	"	"	"
			115			3.0 V						"										IN_3	"	"	"
			116				3.0 V					"										IN_4	"	"	"
			117					3.0 V				"										IN_5	"	"	"
			118						3.0 V			"										IN_6	"	"	"
			119							3.0 V		"										IN_7	"	"	"
			120								3.0 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
2 T_A = +125°C	$I_{IN(off)}$		121	25 µA								0 V									50 V	OUT_1		500	µA
			122		25 µA							"								50V		OUT_2		"	"
			123			25 µA						"							50 V			OUT_3		"	"
			124				25 µA					"						50 V				OUT_4		"	"
			125					25 µA				"					50 V					OUT_5		"	"
			126						25 µA			"				50 V						OUT_6		"	"
			127							25 µA		"			50 V							OUT_7		"	"
			128								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		129	2.4 V								"									350 mA	IN_1		2.0	V
			130		2.4 V							"								350 mA		IN_2		"	"
			131			2.4 V						"							350 mA			IN_3		"	"
			132				2.4 V					"						350 mA				IN_4		"	"
			133					2.4 V				"					350 mA					IN_5		"	"
			134						2.4 V			"				350 mA						IN_6		"	"
			135							2.4 V		"			350 mA							IN_7		"	"
			136								2.4 V	"		350 mA								IN_8		"	"
	I_R		137									0 V	50 V								0 V	COM		10.0	µA
			138									"	"							0 V		COM		"	"
			139									"	"						0 V			COM		"	"
			140									"	"					0 V				COM		"	"
			141									"	"				0 V					COM		"	"
			142									"	"			0 V						COM		"	"
			143									"	"		0 V							COM		"	"
			144									"		0 V								COM		"	"
	V_F		145									"	0 V								350 mA	OUT_1		2.0	V
			146									"	"							350 mA		OUT_2		"	"
			147									"	"						350 mA			OUT_3		"	"
			148									"	"					350 mA				OUT_4		"	"
			149									"	"				350 mA					OUT_5		"	"
			150									"	"			350 mA						OUT_6		"	"
			151									"	"		350 mA							OUT_7		"	"
			152									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	153	IB_1								"									350 mA	IB_1-OUT_1	1000		
			154		IB_2							"								350 mA		IB_2-OUT_2	"		
			155			IB_3						"							350 mA			IB_3-OUT_3	"		
			156				IB_4					"						350 mA				IB_4-OUT_4	"		
			157					IB_5				"					350 mA					IB_5-OUT_5	"		
			158						IB_6			"				350 mA						IB_6-OUT_6	"		
			159							IB_7		"			350 mA							IB_7-OUT_7	"		
			160								IB_8	"		350 mA								IB_8-OUT_8	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	I_{CEX}		161									0 V									50 V	OUT_1		10.0	µA
			162									"								50 V		OUT_2		"	"
			163									"							50 V			OUT_3		"	"
			164									"						50 V				OUT_4		"	"
			165									"					50 V					OUT_5		"	"
			166									"				50 V						OUT_6		"	"
			167									"			50 V							OUT_7		"	"
			168									"		50 V								OUT_8		"	"
	$V_{CE(sat)}$	3007	169	850 µA								"									350 mA	OUT_1		1.8	V
			170		850 µA							"								350 mA		OUT_2		"	"
			171			850 µA						"							350 mA			OUT_3		"	"
			172				850 µA					"						350 mA				OUT_4		"	"
			173					850 µA				"					350 mA					OUT_5		"	"
			174						850 µA			"				350 mA						OUT_6		"	"
			175							850 µA		"			350 mA							OUT_7		"	"
			176								850 µA	"		350 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	177	550 µA								"									200 mA	OUT_1		1.5	V
			178		550 µA							"								200 mA		OUT_2		"	"
			179			550 µA						"							200 mA			OUT_3		"	"
			180				550 µA					"						200 mA				OUT_4		"	"
			181					550 µA				"					200 mA					OUT_5		"	"
			182						550 µA			"				200 mA						OUT_6		"	"
			183							550 µA		"			200 mA							OUT_7		"	"
			184								550 µA	"		200 mA								OUT_8		"	"
	$V_{CE(sat)}$	3007	185	350 µA								"									100 mA	OUT_1		1.3	V
			186		350 µA							"								100 mA		OUT_2		"	"
			187			350 µA						"							100 mA			OUT_3		"	"
			188				350 µA					"						100 mA				OUT_4		"	"
			189					350 µA				"					100 mA					OUT_5		"	"
			190						350 µA			"				100 mA						OUT_6		"	"
			191							350 µA		"			100 mA							OUT_7		"	"
			192								350 µA	"		100 mA								OUT_8		"	"
	$I_{IN(on)}$		193	3.0 V								"										IN_1	1180	2400	µA
			194		3.0 V							"										IN_2	"	"	"
			195			3.0 V						"										IN_3	"	"	"
			196				3.0 V					"										IN_4	"	"	"
			197					3.0 V				"										IN_5	"	"	"
			198						3.0 V			"										IN_6	"	"	"
			199							3.0 V		"										IN_7	"	"	"
			200								3.0 V	"										IN_8	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
3 T_A = -55°C	$I_{IN(off)}$		201	25 µA								0 V									50 V	OUT_1		500	µA
			202		25 µA							"								50V		OUT_2		"	"
			203			25 µA						"							50 V			OUT_3		"	"
			204				25 µA					"						50 V				OUT_4		"	"
			205					25 µA				"					50 V					OUT_5		"	"
			206						25 µA			"				50 V						OUT_6		"	"
			207							25 µA		"			50 V							OUT_7		"	"
			208								25 µA	"		50 V								OUT_8		"	"
	$V_{IN(on)}$		209	3.0 V								"									350 mA	OUT_1		2.0	V
			210		3.0 V							"								350 mA		OUT_2		"	"
			211			3.0 V						"							350 mA			OUT_3		"	"
			212				3.0 V					"						350 mA				OUT_4		"	"
			213					3.0 V				"					350 mA					OUT_5		"	"
			214						3.0 V			"				350 mA						OUT_6		"	"
			215							3.0 V		"			350 mA							OUT_7		"	"
			216								3.0 V	"		350 mA								OUT_8		"	"
	I_R		217									0 V	50 V								0 V	COM		10.0	µA
			218									"	"							0 V		COM		"	"
			219									"	"						0 V			COM		"	"
			220									"	"					0 V				COM		"	"
			221									"	"				0 V					COM		"	"
			222									"	"			0 V						COM		"	"
			223									"	"		0 V							COM		"	"
			224									"	"	0 V								COM		"	"
	V_F		225									"	0 V								350 mA	OUT_1		2.0	V
			226									"	"							350 mA		OUT_2		"	"
			227									"	"						350 mA			OUT_3		"	"
			228									"	"					350 mA				OUT_4		"	"
			229									"	"				350 mA					OUT_5		"	"
			230									"	"			350 mA						OUT_6		"	"
			231									"	"		350 mA							OUT_7		"	"
			232									"	"	350 mA								OUT_8		"	"
	h_{FE}	3003	233	IB_1								"									350 mA	IB_1-OUT_1	500		
			234		IB_2							"								350 mA		IB_2-OUT_2	"		
			235			IB_3						"							350 mA			IB_3-OUT_3	"		
			236				IB_4					"						350 mA				IB_4-OUT_4	"		
			237					IB_5				"					350 mA					IB_5-OUT_5	"		
			238						IB_6			"				350 mA						IB_6-OUT_6	"		
			239							IB_7		"			350 mA							IB_7-OUT_7	"		
			240								IB_8	"		350 mA								IB_8-OUT_8	"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Pin number and signal designation																Measured terminal	Limits		Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		Min	Max	
				IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	GND	COM	OUT_8	OUT_7	OUT_6	OUT_5	OUT_4	OUT_3	OUT_2	OUT_1				
9 T_A = +25°C	t_{PLH}	3003 Fig. 4	241	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	0 V									OUT	IN_1-OUT_1		750	ns
			242									"								OUT		IN_2-OUT_2		"	"
			243									"							OUT			IN_3-OUT_3		"	"
			244									"						OUT				IN_4-OUT_4		"	"
			245									"					OUT					IN_5-OUT_5		"	"
			246									"				OUT						IN_6-OUT_6		"	"
			247									"			OUT							IN_7-OUT_7		"	"
			248									"		OUT								IN_8-OUT_8		"	"
	t_{PHL}	3003 Fig. 4	249	IN_1	IN_2	IN_3	IN_4	IN_5	IN_6	IN_7	IN_8	"									OUT	IN_1-OUT_1		300	ns
			250									"								OUT		IN_2-OUT_2		"	"
			251									"							OUT			IN_3-OUT_3		"	"
			252									"						OUT				IN_4-OUT_4		"	"
			253									"					OUT					IN_5-OUT_5		"	"
			254									"				OUT						IN_6-OUT_6		"	"
			255									"			OUT							IN_7-OUT_7		"	"
			256									"		OUT								IN_8-OUT_8		"	"

NOTE: Pins not designated are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

4.4 Technology Conformance inspection (TCI). Technology conformance inspection shall be in accordance with MIL-PRF-38535 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table III of MIL-PRF-38535 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, 7, 8, 10, and 11 in table I shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of MIL-PRF-38535.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table IV of MIL-PRF-38535 and as follows:

a. End point electrical parameters shall be as specified in table II herein.

b. The steady-state life test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table V of MIL-PRF-38535. End point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified and as follows.

4.5.1 Voltage and current. All voltage values given are referenced to the microcircuit ground terminal of the device under test (DUT). Currents values given for conventional current and are positive when flowing into the referenced terminal.

4.5.2 Life test and burn-in cooldown procedure. When devices are measured at +25°C following application of the steady-state life or burn-in test condition, they shall be cooled within 10°C of their power stable condition at room temperature prior to removal of the bias.

5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

TABLE IV. Group C end-point electrical parameters. T_A = +25°C

Test	Limits		Delta		Unit
	Min	Max	Min	Max	
I_{CEX}	---	10.0	-0.5	+0.5	µA
h_{FE}	1000	---	-25%	25%	---

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.

b. Pin and compliance identifier, if applicable (see 1.2).

c. Requirements for delivery of one copy of the conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

d. Requirements for certificate of compliance, if applicable.

e. Requirements for notification of change of product or process to acquiring activity in addition to notification of the qualifying activity, if applicable.

f. Requirements for failure analysis (including required test condition of MIL-STD-883, method 5003), corrective action and reporting of results, if applicable.

g. Requirements for product assurance options.

h. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements should not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.

i. Requirements for "JAN" marking.

j. Packaging requirements (see 5.1).

6.3 Superseding information. The requirements of MIL-M-38510 have been superseded to take advantage of the available Qualified Manufacturer Listing (QML) system provided by MIL-PRF-38535. Previous references to MIL-M-38510 in this document have been replaced by appropriate references to MIL-PRF-38535. All technical requirements now consist of this specification and MIL-PRF-38535. The MIL-M-38510 specification sheet number and PIN have been retained to avoid adversely impacting existing government logistics systems and contractor's parts lists.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-38535 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DSCC-VQ, 3990 E. Broad Street, Columbus, Ohio 43123-1199.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535, MIL-STD-1331, and as follows:

GND	Ground zero voltage potential
I_{CEX}	Collector cutoff current
V_{IN}	Voltage level at an input terminal
V_F	Forward voltage drop
V_{CE}	Collector emitter saturation voltage
I_{IN}	Current flowing into an input terminal
I_R	Clamp diode leakage current
V_F	Clamp diode forward voltage

6.6 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish A (see 3.4). Longer length leads and lead forming should not affect the part number.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information should not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-PRF-38535.

Military device type	Generic-industry type
01	2001
02	2002
03	2003
04	2004
05	2005
06	2801
07	2802
08	2803
09	2804
10	2805

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army – CR
Navy - EC
Air Force - 11
NASA - NA
DLA – CC

Review activities:
Army - MI, SM
Navy - AS, CG, SH, TD
Air Force – 03, 19, 99

Preparing activity:
DLA - CC

Project 5962-2060

NOTE: The activities listed above were interested in this document as of this date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:35Z
Check the source to verify that this is the current version before use.