QUALIFICATION
REQUIREMENTS
REMOVED

MIL-M-38510/152B
AMENDMENT 1
2 May 2001

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, TTL,
DATA DECODERS/DEMULTIPLEXERS,
MONOLITHIC SILICON

INACTIVE FOR NEW DESIGN AFTER 21 July 1986

This amendment forms a part of MIL-M-38510/152B,
dated 21 July 1986, and is approved for used by
all Departments and Agencies of the Department of Defense.

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
21	new page
22	reprinted without change

PAGE 21

* FIGURE 7, circuit shown previously was for 3-State, the corrected circuit is for the 03 device, an open collector.

The margins of this amendment are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous amendment.

Custodians:
Army - CR
Navy - NW
AF - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5962-1892)

Review activities:
Army - HD, MI, SM
Navy - AS, CG, MC, SH, TD
Air Force - 03, 19

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited..

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:38Z
Check the source to verify that this is the current version before use.

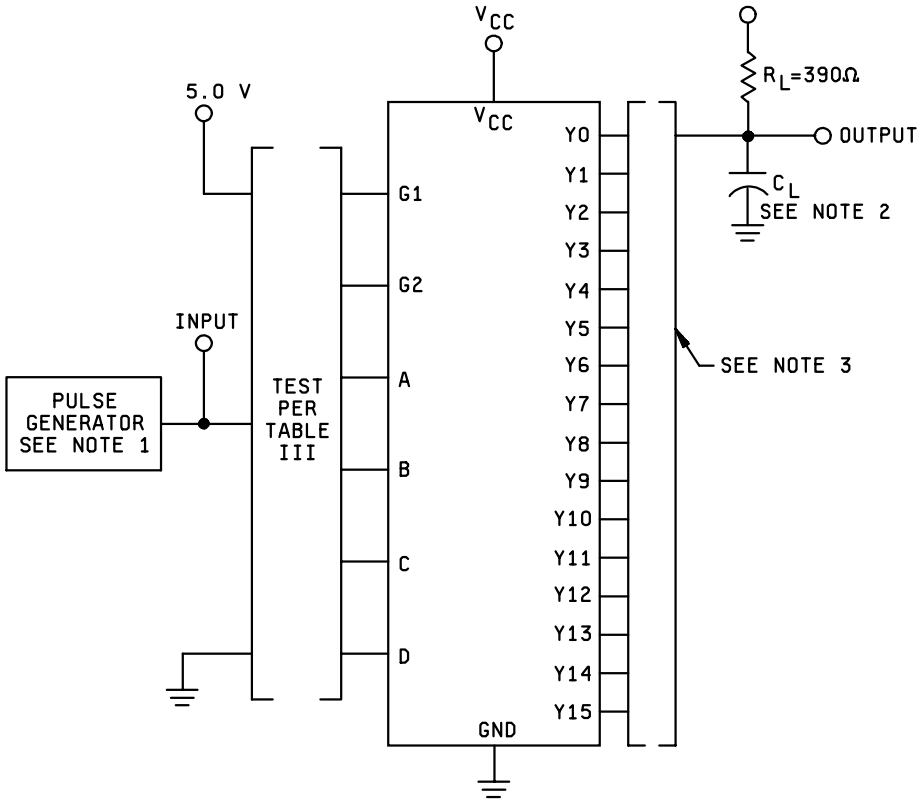

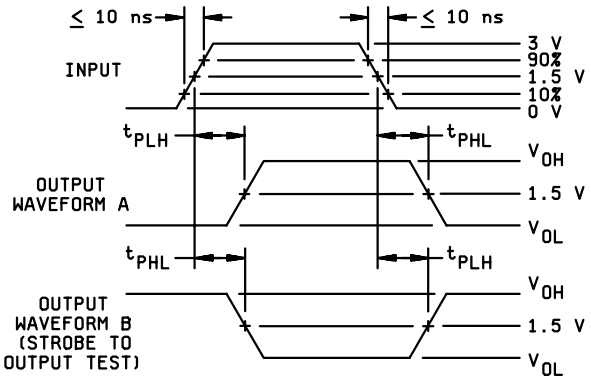

NOTES:
1. The pulse generator has the following characteristics: PRR = 1 MHz, duty cycle = 50%, and $Z_{out} \approx 50\Omega$.
2. C_L = 15pF minimum and includes probe and jig capacitance.
3. Load circuit is applied separately to each output pin under test. All other outputs may be open or loaded.

FIGURE 7. Switching test for device type 03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:38Z
Check the source to verify that this is the current version before use.

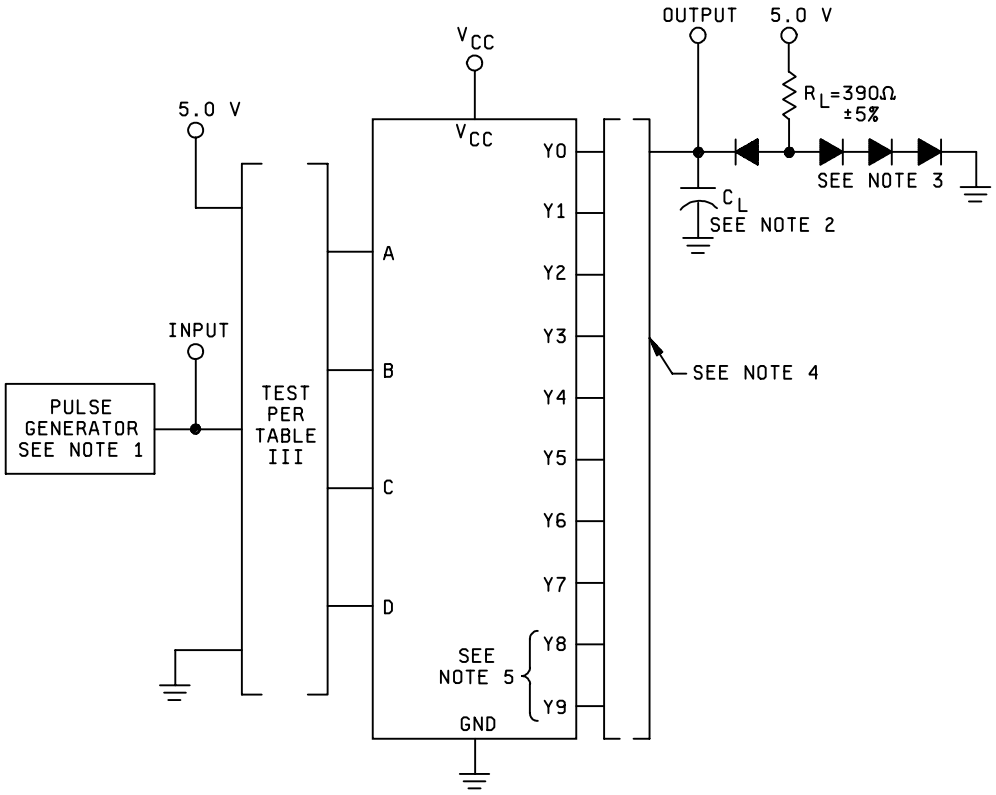

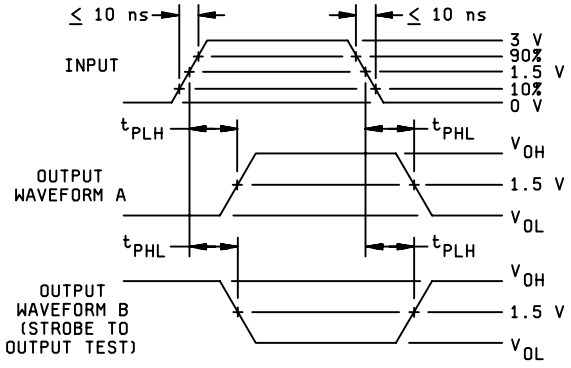

NOTES:
1. The pulse generator has the following characteristics: PRR ≤ 1 MHz, duty cycle = 50%, and Z_{out} ≈ 50Ω.
2. C_L = 50pF minimum and includes probe and jig capacitance.
3. All diodes are 1N3064 or equivalent.
4. Load circuit is applied separately to each output pin under test. All other outputs may be open or loaded.
5. Output pins Y8 and Y9 apply to device types 05 and 06 only.

FIGURE 8. Switching test for device types 04, 05, and 06 .

Reprinted without change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:38Z
Check the source to verify that this is the current version before use.